

Exam Date:09/10/2008

Larimore Bean Company

Page: 1

Examiner: 2

PO Box 607

Larimore, ND

County:

Phone: 701-343-6363

CCC Number:

Location/Container Numbers/Comments	Section	Capacity
PART A - ADDITIONAL SPACE TO BE INCLUDED UNDER LICENSE		
101	S Sharon flat	61,861
212	C Cumming's	32,676
		Total: 94,537
PART B - SPACE TO BE DELETED UNDER LICENSE		
205	C Cumming's	9,290
		Total: 9,290
PART C - ALL SPACE TO BE INCLUDED UNDER LICENSE		
	A	321,000
	B	102,000
	C	66,000
	S	74,000
		Total: 563,000
PART D - TOTAL CAPACITY BY FUNCTIONAL UNIT		
Larimore 89	A B	423,000
Sharon 1187	C S	140,000
		Total: 563,000

Exam Date:09/10/2008
Examiner: 2

Larimore Bean Company
PO Box 607
Larimore, ND
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Larimore

Section: A

A	001	Peaked	eave at side wall		36.000	0.000	0.000	33.20	0.00	0.00	33.200	2.200	35.4	818.2	10.0	31,860
A	002	Peaked	eave at side wall		36.000	0.000	0.000	33.20	0.00	0.00	33.200	2.200	35.4	818.2	10.0	31,860
A	003	Peaked	eave at side wall		36.000	0.000	0.000	33.20	0.00	0.00	33.200	2.200	35.4	818.2	10.0	31,860
A	004	Peaked	eave at side wall		30.000	0.000	0.000	22.30	0.00	0.00	22.300	1.800	24.1	568.2	9.00	14,926
A	005	Peaked	eave at side wall		30.000	0.000	0.000	22.30	0.00	0.00	22.300	1.800	24.1	568.2	9.00	14,926
A	006	Round	eave at side wall		12.000	0.000	0.000	12.40	2.00	0.00	14.400	0.000	14.4	90.9	5.00	1,374
A	007	Round	eave at side wall		12.000	0.000	0.000	12.40	2.00	0.00	14.400	0.000	14.4	90.9	5.00	1,374
A	008	Peaked	eave at side wall		15.000	0.000	0.000	18.50	2.50	0.00	21.000	0.900	21.9	142.1	5.50	3,283
A	009	Flat	bag storage		0.000	100.8	59.00	2.500	0.00	0.00	2.500	0.000	2.5	4780.7	10.0	13,147
A	010	Flat	overhead drag to floor 22.0'		0.000	237.4	59.00	8.100	0.00	0.00	8.100	0.000	8.1	11259.3	10.0	100,320
A	011	Peaked	eave at side wall		48.000	0.000	0.000	40.30	0.00	0.00	40.300	3.400	43.7	1454.6	10.0	69,923
A	105	Peaked	eave at side wall		21.000	0.000	0.000	14.00	2.80	0.00	16.800	1.300	18.1	278.4	6.80	5,382

Bin count: 12 Facility: Larimore Section: A Total: 320,235

To Even: 321,000

Section: B

B	001	Peaked	eave at side wall		24.000	0.000	0.000	24.00	3.70	0.00	27.700	1.400	29.1	363.7	7.80	11,410
B	002	Peaked	eave at side wall		24.000	0.000	0.000	24.00	3.70	0.00	27.700	1.400	29.1	363.7	7.80	11,410
B	003	Peaked	eave at side wall		15.000	0.000	0.000	17.50	2.00	0.00	19.500	0.900	20.4	142.1	5.50	3,058
B	004	Peaked	eave at side wall		15.000	0.000	0.000	17.50	2.00	0.00	19.500	0.900	20.4	142.1	5.50	3,058

Exam Date:09/10/2008
Examiner: 2

Larimore Bean Company
PO Box 607
Larimore, ND
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg).	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	-------------------------------	--------	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

Facility: Larimore

Section: B

B	005		Peaked	eave at side wall	15.000	0.000	0.000	17.50	2.00	0.00	19.500	0.900	20.4	142.1	5.50	3,058
B	014		Peaked	eave at side wall	48.000	0.000	0.000	40.30	0.00	0.00	40.300	3.400	43.7	1454.6	10.0	69,923

Bin count: 6

Facility: Larimore Section: B Total: 101,917

To Even: 102,000

Exam Date: 09/10/2008 Larimore Bean Company Page: 3
 Examiner: 2 PO Box 607
Larimore, ND
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Sharon

Section: C

C	210	Peaked	eave at side wall-Cummings	41.900	0.000	0.000	24.25	0.00	0.00	0.00	24.250	2.500	26.8	1108.4	10.0	32,676
Added	C	212	Peaked	eave at side wall-Cummings	41.900	0.000	0.000	24.25	0.00	0.00	24.250	2.500	26.8	1108.4	10.0	32,676

Bin count: 2 Facility: Sharon Section: C Total:

To Even: 66,000

Section: S


S	001	Peaked	eave at side wall	16.000	0.000	0.000	20.00	2.00	0.00	0.00	22.000	1.000	23.0	161.6	5.80	3,933
S	002	Peaked	eave at side wall	16.000	0.000	0.000	20.00	2.00	0.00	0.00	22.000	1.000	23.0	161.6	5.80	3,933
S	003	Peaked	eave at side wall	16.000	0.000	0.000	20.00	2.00	0.00	0.00	22.000	1.000	23.0	161.6	5.80	3,933
Added	S	101	Flat	eave at side wall	0.000	198.8	39.10	9.000	0.00	0.00	9.000	0.000	9.0	6248.5	10.0	61,861

Bin count: 4 Facility: Sharon Section: S Total:


To Even: 74,000

<p>Overall Licensed Bin Capacity for: Larimore Bean Company</p> <p>Bin count: 24</p>	<p>Licensed Capacity: (Includes pack)</p> <p style="text-align: right;"><u>561,164 Bu.</u></p> <p>Licensed Capacity (to even): (Includes pack and section totals are rounded up to next highest 1000)</p> <p style="text-align: right;"><u>563,000 Bu.</u></p>
--	--

CUMMINGS AG INC.
CUMMINGS N.D.

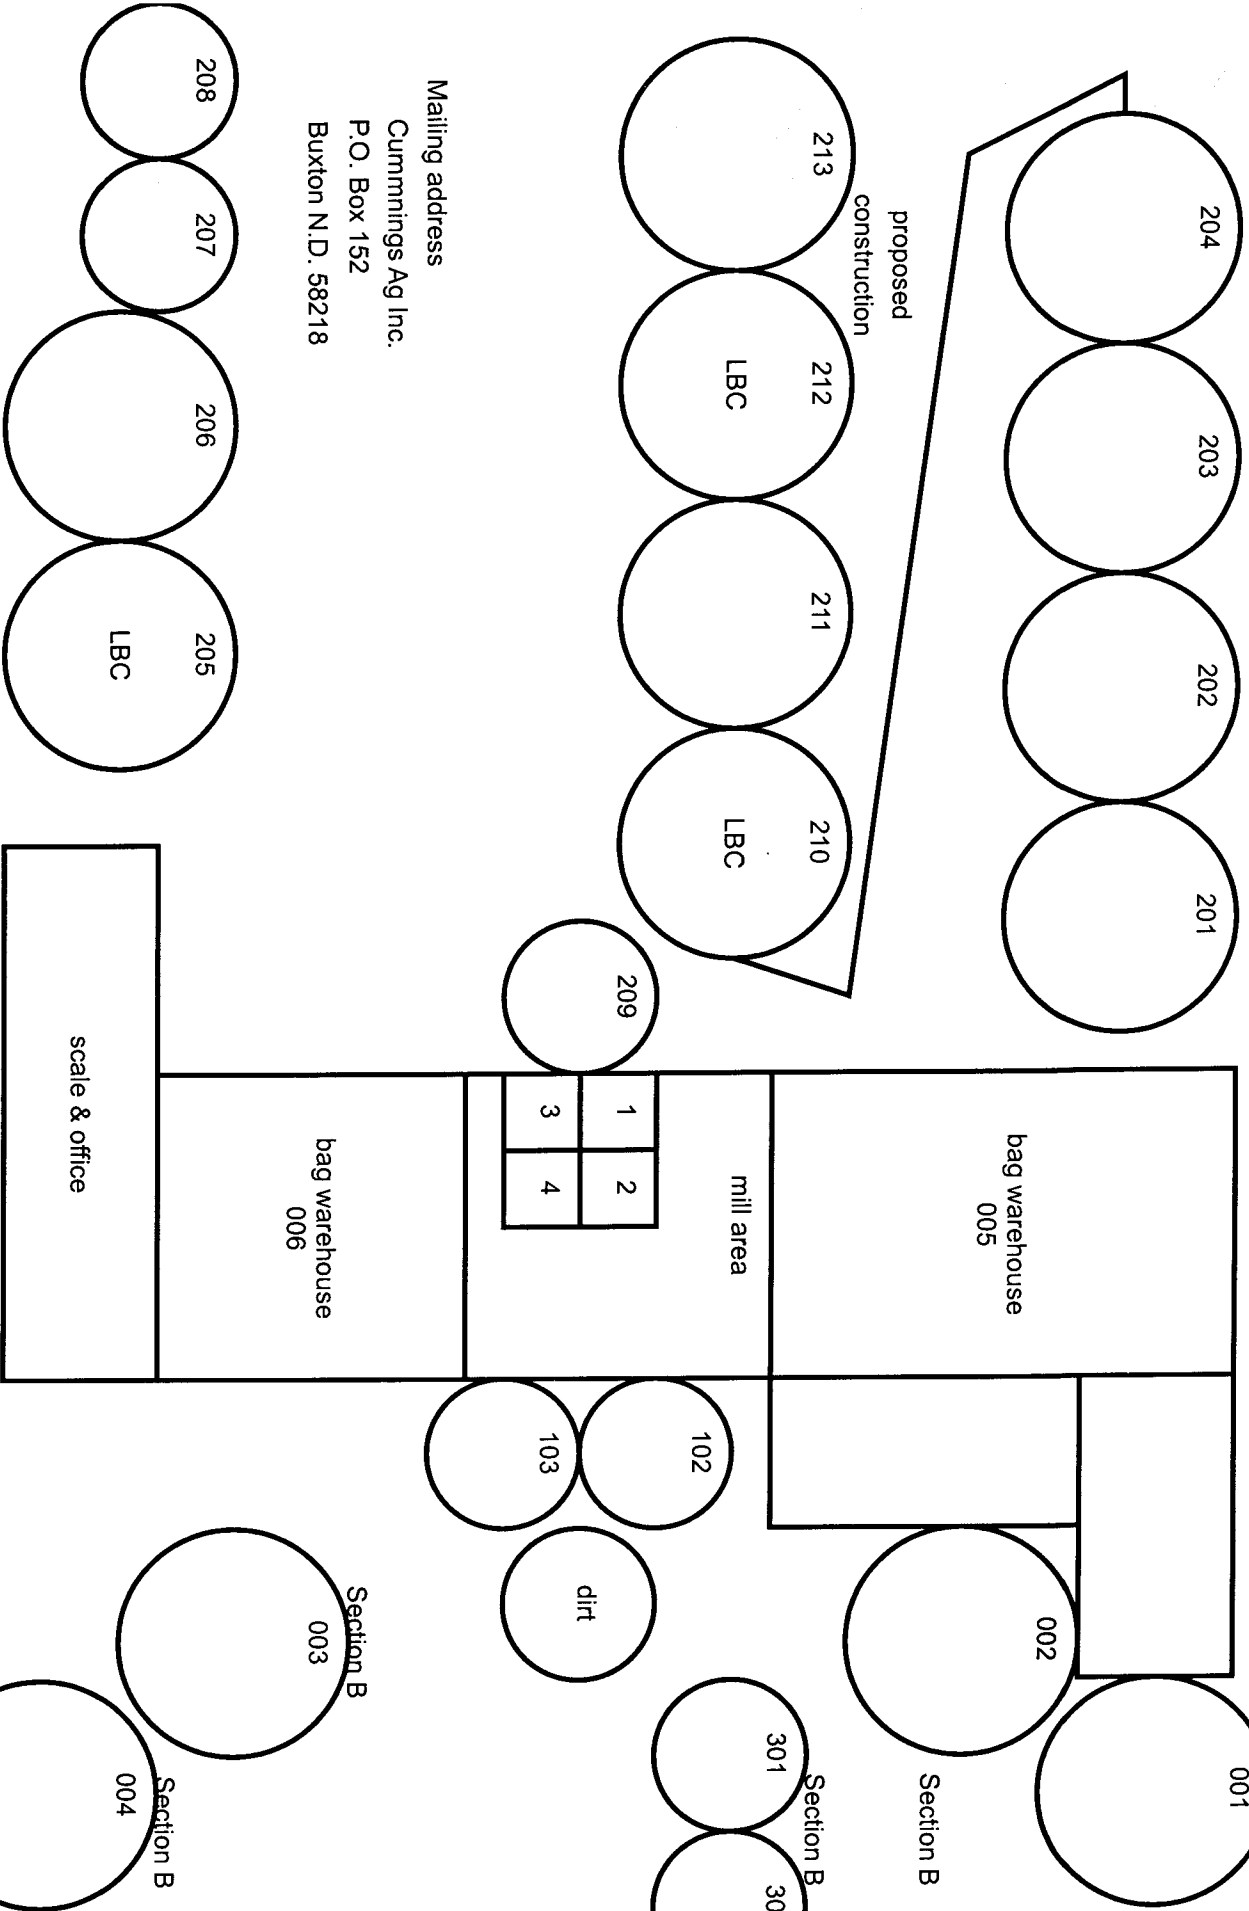

Mailing address
Cummings Ag Inc.
P.O. Box 152
Buxton N.D. 58218

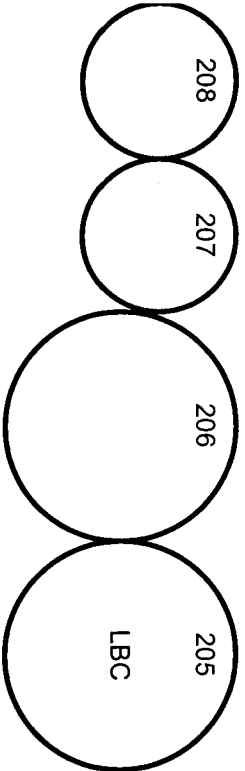

LARIMORE BEAN COMPANY

LARIMORE ND

Sharon location

Section S 101

flat located SW of office across tracks

Base Dimensions

39.1' W x 198.8' L

sidewall ht. 16.75'

bottom of center drag to floor 16.8'

estimated grain ht. at sidewall 5.0' plus estimated center grain ht of 13.75'

capacity calculated with an average grain depth of 9.0'

