

Exam Date: 01/30/2008

Thompson Farmers Co-Operative Elevator

Page: 1

Examiner: 2

PO Box 327
Thompson, ND
County:
Phone: 701-599-2740
CCC Number:

Location/Container Numbers/Comments	Section	Capacity
PART A - ADDITIONAL SPACE TO BE INCLUDED UNDER LICENSE		
400	C steel flat 150' x 60'	131,310
201	C } New construction	220,424
202		220,424
		Total: 572,158

PART B - SPACE TO BE DELETED UNDER LICENSE

001	E	35,501
002	E } Potato whse	35,642
003		35,501
004		28,170
005		28,282
006		28,170
100	F Leased flat prior years	50,402
		Total: 241,668

PART C - ALL SPACE TO BE INCLUDED UNDER LICENSE

A	329,000
B	233,000
C	1,257,000
Total: 1,819,000	

PART D - TOTAL CAPACITY BY FUNCTIONAL UNIT

Thompson	39	A B C	1,819,000
			Total: 1,819,000

current bond \$445,000

current capacity 1,458,000 bushels

1,819,000 bushels requires bond of \$515,000

increase bond by \$70,000

Client ID: 131

NDPSC Bin Capacity Chart

02/21/2008 11:04:58 AM

Exam Date: 01/30/2008

Thompson Farmers Co-Operative Elevator

Page: 1

Examiner: 2

PO Box 327
Thompson, ND

County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Ireg).	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak Capac.	Depth	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	---------------------------	--------	-------	-----------	----------------	----------------	-----------------	---------------------	-------	------------------	------------	---------------------------

Facility: Thompson

Section: A

A	001	Square	bin floor		0.000	3.500	6.800	57.00	0.00	0.00	57.000	0.000	57.0	19.1	2.00	1,111
A	004	Square	bin floor		0.000	8.800	6.600	53.00	0.00	0.00	53.000	0.000	53.0	46.7	4.00	2,574
A	005	Square	bin floor		0.000	8.800	6.700	53.00	0.00	0.00	53.000	0.000	53.0	47.4	4.00	2,612
A	006 T	Square	bin floor		0.000	2.800	13.60	55.00	0.00	0.00	55.000	0.000	55.0	30.6	2.50	1,725
A	006 B	Square	bin floor - top 55'		0.000	11.60	13.20	16.00	0.00	0.00	16.000	0.000	16.0	123.1	6.50	2,098
A	008	Square	bin floor		0.000	12.20	6.600	54.00	0.00	0.00	54.000	0.000	54.0	64.7	5.00	3,669
A	009	Square	bin floor		0.000	12.20	6.700	54.00	0.00	0.00	54.000	0.000	54.0	65.7	5.00	3,725
A	010	Square	bin floor		0.000	5.900	6.800	54.00	0.00	0.00	54.000	0.000	54.0	32.3	2.50	1,788
A	011	Square	bin floor		0.000	11.80	13.60	71.00	0.00	0.00	71.000	0.000	71.0	129.0	6.50	9,754
A	012	Square	bin floor		0.000	11.80	6.800	54.00	0.00	0.00	54.000	0.000	54.0	64.5	5.00	3,657
A	013	Square	bin floor		0.000	5.900	6.800	54.00	0.00	0.00	54.000	0.000	54.0	32.3	2.50	1,788
A	014 T	Square	bin floor		0.000	6.800	6.900	18.00	0.00	0.00	18.000	0.000	18.0	37.7	3.00	699
A	014 B	Square	bin floor - top 18'		0.000	11.80	6.900	36.00	0.00	0.00	36.000	0.000	36.0	65.5	5.00	2,476
A	016	Square	bin floor		0.000	11.80	13.60	71.00	0.00	0.00	71.000	0.000	71.0	129.0	6.50	9,754
A	017	Square	bin floor		0.000	5.900	6.900	54.00	0.00	0.00	54.000	0.000	54.0	32.7	2.50	1,810
A	020	Square	bin floor		0.000	12.20	6.600	54.00	0.00	0.00	54.000	0.000	54.0	64.7	5.00	3,669
A	021	Square	bin floor		0.000	12.20	6.700	54.00	0.00	0.00	54.000	0.000	54.0	65.7	5.00	3,725

Client ID: 131

NDPSC Bin Capacity Chart

02/21/2008 11:04:58 AM

Exam Date: 01/30/2008

Thompson Farmers Co-Operative Elevator

Page: 2

Examiner: 2

PO Box 327
Thompson, ND

County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg).	Length	Width	Side wall	Add for Hopper	Det. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	-------------------------------	--------	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

Facility: Thompson

Section: A

A		022 T	Square	bin floor	0.000	2.800	13.60	55.00	0.00	0.00	55.000	0.000	55.0	30.6	2.50	1,725
A		022 B	Square	bin floor - top 55'	0.000	11.60	13.20	16.00	0.00	0.00	16.000	0.000	16.0	123.1	6.50	2,098
A		023	Square	bin floor	0.000	8.800	6.700	53.00	0.00	0.00	53.000	0.000	53.0	47.4	4.00	2,612
A		024	Square	bin floor	0.000	8.800	6.600	53.00	0.00	0.00	53.000	0.000	53.0	46.7	4.00	2,574
A		025	Square	bin floor	0.000	3.500	6.900	57.00	0.00	0.00	57.000	0.000	57.0	19.4	2.00	1,128
A		026	Square	bin floor	0.000	5.900	6.900	54.00	0.00	0.00	54.000	0.000	54.0	32.7	2.50	1,810
A		101 T	Square	bin floor	0.000	12.20	13.50	58.00	0.00	0.00	58.000	0.000	58.0	132.4	6.50	8,178
A		101 B	Square	bin floor - top 58'	0.000	15.80	13.20	10.00	0.00	0.00	10.000	0.000	10.0	167.7	7.00	1,794
A		102	Square	bin floor -	0.000	12.20	13.50	60.00	0.00	0.00	60.000	0.000	60.0	132.4	6.50	8,460
A		103 T	Square	bin floor -	0.000	12.20	13.50	58.00	0.00	0.00	58.000	0.000	58.0	132.4	6.50	8,178
A		103 B	Square	bin floor - top 58'	0.000	15.80	13.20	10.00	0.00	0.00	10.000	0.000	10.0	167.7	7.00	1,794
A		104 T	Square	bin floor -	0.000	2.300	13.80	38.00	0.00	0.00	38.000	0.000	38.0	25.5	2.50	993
A		104 M	Square	bin floor - top 38'	0.000	12.20	13.80	20.00	0.00	0.00	20.000	0.000	20.0	135.3	6.50	2,882
A		104B	Square	bin floor - top & middle 58'	0.000	15.80	13.50	10.00	0.00	0.00	10.000	0.000	10.0	171.5	7.00	1,835
A		105	Square	bin floor	0.000	9.700	13.80	40.00	0.00	0.00	40.000	0.000	40.0	107.6	6.20	4,571
A		106	Square	bin floor	0.000	12.20	13.80	60.00	0.00	0.00	60.000	0.000	60.0	135.3	6.50	8,646
A		107 T	Square	bin floor	0.000	12.20	13.80	58.00	0.00	0.00	58.000	0.000	58.0	135.3	6.50	8,357

Exam Date:01/30/2008
 Examiner: 2

Thompson Farmers Co-Operative Elevator
 PO Box 327
 Thompson, ND
 County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Ireg).	Length	Width	Side wall	Add for Hopper	Dec. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	---------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Thompson

Section: A

A		107 B	Square	bin floor	0.000	15.80	13.50	10.00	0.00	0.00	10.000	0.000	10.0	171.5	7.00	1,835
A		108 T	Square	bin floor	0.000	12.20	13.80	58.00	0.00	0.00	58.000	0.000	58.0	135.3	6.50	8,357
A		108 B	Square	bin floor - top 58'	0.000	15.80	13.50	10.00	0.00	0.00	10.000	0.000	10.0	171.5	7.00	1,835
A		109	Square	bin floor	0.000	12.20	13.80	60.00	0.00	0.00	60.000	0.000	60.0	135.3	6.50	8,646
A		110 T	Square	bin floor	0.000	12.20	13.80	58.00	0.00	0.00	58.000	0.000	58.0	135.3	6.50	8,357
A		110 B	Square	bin floor - top 58'	0.000	15.80	13.50	10.00	0.00	0.00	10.000	0.000	10.0	171.5	7.00	1,835
A		111 T	Square	bin floor -	0.000	12.20	13.80	58.00	0.00	0.00	58.000	0.000	58.0	135.3	6.50	8,357
A		111 B	Square	bin floor - top 58'	0.000	15.80	13.50	10.00	0.00	0.00	10.000	0.000	10.0	171.5	7.00	1,835
A		112	Square	bin floor	0.000	12.20	13.80	60.00	0.00	0.00	60.000	0.000	60.0	135.3	6.50	8,646
A		113 T	Square	bin floor	0.000	12.20	13.80	58.00	0.00	0.00	58.000	0.000	58.0	135.3	6.50	8,357
A		113 B	Square	bin floor - top 58'	0.000	15.80	13.50	10.00	0.00	0.00	10.000	0.000	10.0	171.5	7.00	1,835
A		114 T	Square	bin floor -	0.000	12.20	13.80	58.00	0.00	0.00	58.000	0.000	58.0	135.3	6.50	8,357
A		114 B	Square	bin floor - top 58'	0.000	15.80	13.50	10.00	0.00	0.00	10.000	0.000	10.0	171.5	7.00	1,835
A		115	Square	bin floor -	0.000	12.20	13.80	60.00	0.00	0.00	60.000	0.000	60.0	135.3	6.50	8,646
A		116 T	Square	bin floor -	0.000	12.20	13.80	58.00	0.00	0.00	58.000	0.000	58.0	135.3	6.50	8,357
A		116 B	Square	bin floor - top 58'	0.000	15.80	13.50	10.00	0.00	0.00	10.000	0.000	10.0	171.5	7.00	1,835
A		117	Square	bin floor -	0.000	9.700	13.80	40.00	0.00	0.00	40.000	0.000	40.0	107.6	6.20	4,571

Exam Date: 01/30/2008
 Examiner: 2

Thompson Farmers Co-Operative Elevator
 PO Box 327
 Thompson, ND
 County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Ireg)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	--------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Thompson

Section: A

A	118 T	Square	bin floor -		0.000	2.300	13.80	38.00	0.00	0.00	38.000	0.000	38.0	25.5	2.50	993
A	118 M	Square	bin floor - top 38'		0.000	12.20	13.80	20.00	0.00	0.00	20.000	0.000	20.0	135.3	6.50	2,882
A	118B	Square	bin floor - top & middle 58'		0.000	15.80	13.50	10.00	0.00	0.00	10.000	0.000	10.0	171.5	7.00	1,835
A	119	Square	bin floor		0.000	12.20	13.80	60.00	0.00	0.00	60.000	0.000	60.0	135.3	6.50	8,646
A	120 T	Square	bin floor		0.000	12.20	13.80	58.00	0.00	0.00	58.000	0.000	58.0	135.3	6.50	8,357
A	120 B	Square	bin floor - top 58'		0.000	15.80	13.50	10.00	0.00	0.00	10.000	0.000	10.0	171.5	7.00	1,835
A	121 T	Square	bin floor -		0.000	12.20	13.80	58.00	0.00	0.00	58.000	0.000	58.0	135.3	6.50	8,357
A	121 B	Square	bin floor - top 58'		0.000	15.80	13.50	10.00	0.00	0.00	10.000	0.000	10.0	171.5	7.00	1,835
A	122	Square	bin floor -		0.000	12.20	13.80	60.00	0.00	0.00	60.000	0.000	60.0	135.3	6.50	8,646
A	123 T	Square	bin floor -		0.000	12.20	13.80	58.00	0.00	0.00	58.000	0.000	58.0	135.3	6.50	8,357
A	123 B	Square	bin floor - top 58'		0.000	15.80	13.50	10.00	0.00	0.00	10.000	0.000	10.0	171.5	7.00	1,835
A	124 T	Square	bin floor -		0.000	12.20	13.80	58.00	0.00	0.00	58.000	0.000	58.0	135.3	6.50	8,357
A	124 B	Square	bin floor - top 58'		0.000	15.80	13.50	10.00	0.00	0.00	10.000	0.000	10.0	171.5	7.00	1,835
A	125	Square	bin floor -		0.000	12.20	13.80	60.00	0.00	0.00	60.000	0.000	60.0	135.3	6.50	8,646
A	126 T	Square	bin floor -		0.000	12.20	13.80	58.00	0.00	0.00	58.000	0.000	58.0	135.3	6.50	8,357
A	126 B	Square	bin floor - top 58'		0.000	15.80	13.50	10.00	0.00	0.00	10.000	0.000	10.0	171.5	7.00	1,835
A	127	Square	bin floor -		0.000	9.700	13.50	40.00	0.00	0.00	40.000	0.000	40.0	105.3	6.20	4,473

Client ID: 131

NDPSC Bin Capacity Chart

02/21/2008 11:05:00 AM

Exam Date: 01/30/2008

Thompson Farmers Co-Operative Elevator
PO Box 327
Thompson, ND

Page: 5

Examiner: 2

County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Ireg), Length	Width	Side wall	Add for Hopper	Dec. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Thompson

Section: A

A	128 T	Square	bin floor -	0.000	2.300	13.50	38.00	0.00	0.00	38.000	0.000	38.0	25.0	2.50	974
A	128 M	Square	bin floor - top 38'	0.000	12.20	13.50	20.00	0.00	0.00	20.000	0.000	20.0	132.4	6.50	2,820
A	128B	Square	bin floor - top & middle 58'	0.000	15.80	13.20	10.00	0.00	0.00	10.000	0.000	10.0	167.7	7.00	1,794
A	129	Square	bin floor	0.000	12.20	13.50	60.00	0.00	0.00	60.000	0.000	60.0	132.4	6.50	8,460
A	130 T	Square	bin floor	0.000	12.20	13.50	58.00	0.00	0.00	58.000	0.000	58.0	132.4	6.50	8,178
A	130 B	Square	bin floor - top 58'	0.000	15.80	13.20	10.00	0.00	0.00	10.000	0.000	10.0	167.7	7.00	1,794

Bin count: 74

Facility: Thompson Section: A Total: **328,866**

To Even: **329,000**

Section: B

B	001 T	Square	bin floor	0.000	13.40	8.600	44.50	0.00	0.00	44.500	0.000	44.5	92.6	5.80	4,360
B	001 B	Square	bin floor - top 44.5'	0.000	12.90	8.100	13.00	0.00	0.00	13.000	0.000	13.0	84.0	5.80	1,155
B	002	Square	bin floor -	0.000	6.900	8.500	40.00	0.00	0.00	40.000	0.000	40.0	47.1	4.00	1,959
B	003	Square	bin floor -	0.000	6.300	8.500	40.00	0.00	0.00	40.000	0.000	40.0	43.0	3.50	1,780
B	004 T	Square	bin floor -	0.000	13.40	8.500	44.50	0.00	0.00	44.500	0.000	44.5	91.6	5.80	4,312
B	004 B	Square	bin floor - top 44.5'	0.000	12.90	8.100	13.00	0.00	0.00	13.000	0.000	13.0	84.0	5.80	1,155

Exam Date: 01/30/2008
 Examiner: 2

Thompson Farmers Co-Operative Elevator
 PO Box 327
 Thompson, ND
 County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Thompson

Section: B

B	005 T	Square	bin floor - '		0.000	6.500	8.700	42.00	0.00	0.00	42.000	0.000	42.0	45.5	4.00	1,987
B	005 B	Square	bin floor - top 42'		0.000	12.90	8.400	13.00	0.00	0.00	13.000	0.000	13.0	87.1	5.80	1,198
B	006	Square	bin floor -		0.000	6.400	8.700	40.00	0.00	0.00	40.000	0.000	40.0	44.8	3.50	1,855
B	007 T	Irregular	6.3x8.7 less 4x5 scale		28.100	0.000	0.000	6.000	0.00	0.00	6.000	0.000	6.0	28.1	2.50	173
B	007 B	Square	bin floor - top 6'		0.000	6.300	8.700	34.00	0.00	0.00	34.000	0.000	34.0	44.1	3.50	1,551
B	008	Square	bin floor		0.000	6.900	8.700	40.00	0.00	0.00	40.000	0.000	40.0	48.3	4.20	2,013
B	009	Square	bin floor		0.000	6.400	8.700	40.00	0.00	0.00	40.000	0.000	40.0	44.8	3.50	1,855
B	010 T	Square	bin floor		0.000	6.500	8.700	42.00	0.00	0.00	42.000	0.000	42.0	45.5	4.00	1,987
B	010 B	Square	bin floor - top 42'		0.000	12.90	8.400	13.00	0.00	0.00	13.000	0.000	13.0	87.1	5.80	1,198
B	011 T	Square	bin floor -		0.000	6.500	8.700	42.00	0.00	0.00	42.000	0.000	42.0	45.5	4.00	1,987
B	011 B	Square	bin floor - top 42'		0.000	12.90	8.400	13.00	0.00	0.00	13.000	0.000	13.0	87.1	5.80	1,198
B	012	Square	bin floor -		0.000	6.400	8.700	40.00	0.00	0.00	40.000	0.000	40.0	44.8	3.50	1,855
B	013	Square	bin floor -		0.000	6.900	5.900	40.00	0.00	0.00	40.000	0.000	40.0	32.7	2.50	1,341
B	014	Square	bin floor -		0.000	6.300	5.900	40.00	0.00	0.00	40.000	0.000	40.0	29.9	2.50	1,226
B	015	Square	bin floor -		0.000	6.400	8.700	40.00	0.00	0.00	40.000	0.000	40.0	44.8	3.50	1,855
B	016 T	Square	bin floor -		0.000	6.500	8.700	42.00	0.00	0.00	42.000	0.000	42.0	45.5	4.00	1,987
B	016 B	Square	bin floor - top 42'		0.000	12.90	8.400	13.00	0.00	0.00	13.000	0.000	13.0	87.1	5.80	1,198

Exam Date: 01/30/2008
 Examiner: 2

Thompson Farmers Co-Operative Elevator
 PO Box 327
 Thompson, ND
 County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Dec. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Thompson

Section: B

B	017 T	Square	bin floor -	0.000 6.500 8.600 42.00	0.00	0.00	42.000	0.000	42.0	44.9	3.50	1,952
B	017 B	Square	bin floor - top 42'	0.000 12.90 8.100 13.00	0.00	0.00	13.000	0.000	13.0	84.0	5.80	1,155
B	018	Square	bin floor -	0.000 6.400 8.600 39.00	0.00	0.00	39.000	0.000	39.0	44.2	3.50	1,784
B	019	Square	bin floor -	0.000 2.900 10.60 39.00	0.00	0.00	39.000	0.000	39.0	24.7	2.50	987
B	020	Square	bin floor -	0.000 2.900 10.60 37.00	0.00	0.00	37.000	0.000	37.0	24.7	2.50	937
B	021	Square	bin floor -	0.000 6.400 8.600 39.00	0.00	0.00	39.000	0.000	39.0	44.2	3.50	1,784
B	022 T	Square	bin floor -	0.000 6.500 8.600 42.00	0.00	0.00	42.000	0.000	42.0	44.9	3.50	1,952
B	022 B	Square	bin floor - top 42'	0.000 12.90 8.100 13.00	0.00	0.00	13.000	0.000	13.0	84.0	5.80	1,155
B	101 T	Square	bin floor -	0.000 9.500 12.30 13.00	0.00	0.00	13.000	0.000	13.0	93.9	5.80	1,292
B	101 M	Square	bin floor - top 13'	0.000 9.000 11.80 37.00	0.00	0.00	37.000	0.000	37.0	85.4	5.80	3,343
B	101 B	Square	bin floor - top & middle 50	0.000 16.90 11.80 8.000	0.00	0.00	8.000	0.000	8.0	160.3	7.00	1,372
B	102 T	Square	bin floor -	0.000 9.500 13.50 13.00	0.00	0.00	13.000	0.000	13.0	103.1	6.00	1,420
B	102 M	Square	bin floor - top 13'	0.000 9.000 13.00 37.00	0.00	0.00	37.000	0.000	37.0	94.1	6.00	3,691
B	102 B	Square	bin floor - top & middle 50'	0.000 16.90 13.00 8.000	0.00	0.00	8.000	0.000	8.0	176.6	7.00	1,512
B	103 T	Square	bin floor -	0.000 9.500 12.20 13.00	0.00	0.00	13.000	0.000	13.0	93.2	5.80	1,282
B	103 M	Square	bin floor - top 13'	0.000 9.000 11.70 37.00	0.00	0.00	37.000	0.000	37.0	84.6	5.80	3,312
B	103 B	Square	bin floor - top & middle 50'	0.000 16.90 11.70 8.000	0.00	0.00	8.000	0.000	8.0	158.9	7.00	1,360

Exam Date: 01/30/2008
 Examiner: 2

Thompson Farmers Co-Operative Elevator
 PO Box 327
 Thompson, ND
 County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Thompson

Section: B

B		104 T	Square	bin floor -	0.000	16.00	12.20	13.00	0.00	0.00	13.000	0.000	13.0	156.9		2,179
B		104 B	Square	bin floor - top 13'	0.000	15.70	11.70	36.00	0.00	0.00	36.000	0.000	36.0	147.7		5,679
B		105 T	Square	bin floor -	0.000	16.00	13.50	13.00	0.00	0.00	13.000	0.000	13.0	173.6		2,415
B		105 B	Square	bin floor - top 13'	0.000	15.70	13.00	36.00	0.00	0.00	36.000	0.000	36.0	164.1		6,322
B		106 T	Irregular	bin floor - 16x12.3 less	146.90	0.000	0.000	13.00	0.00	0.00	13.000	0.000	13.0	146.9		2,040
B		106 B	Irregular	bin floor - top 13' 15.7x11.8	137.60	0.000	0.000	36.00	0.00	0.00	36.000	0.000	36.0	137.6		5,276
B		107 T	Square	bin floor	0.000	10.10	12.30	13.00	0.00	0.00	13.000	0.000	13.0	99.9		1,377
B		107 M	Square	bin floor - top 13'	0.000	9.800	11.80	37.00	0.00	0.00	37.000	0.000	37.0	93.0		3,641
B		107B	Irregular	bin floor - top & mdie 50'	115.80	0.000	0.000	8.000	0.00	0.00	8.000	0.000	8.0	115.8		983
B		108 T	Square	bin floor	0.000	10.10	13.50	13.00	0.00	0.00	13.000	0.000	13.0	109.6		1,513
B		108 M	Square	bin floor - top 13'	0.000	9.800	13.00	37.00	0.00	0.00	37.000	0.000	37.0	102.4		4,016
B		108B	Square	bin floor - top & middle 50'	0.000	13.40	13.00	8.000	0.00	0.00	8.000	0.000	8.0	140.0		1,196
B		109 T	Square	bin floor	0.000	10.10	12.20	13.00	0.00	0.00	13.000	0.000	13.0	99.1		1,365
B		109 M	Square	bin floor - top 13'	0.000	9.800	11.70	37.00	0.00	0.00	37.000	0.000	37.0	92.2		3,609
B		109B	Square	bin floor - top & middle 50'	0.000	13.40	11.70	8.000	0.00	0.00	8.000	0.000	8.0	126.0		1,074
B		201 T	Square	bin floor	0.000	11.80	12.30	51.50	0.00	0.00	51.500	0.000	51.5	116.7		6,383
B		201 B	Square	bin floor - top 51.5'	0.000	13.40	11.90	7.000	0.00	0.00	7.000	0.000	7.0	128.2		955

Exam Date:01/30/2008
 Examiner: 2

Thompson Farmers Co-Operative Elevator
 PO Box 327
 Thompson, ND
 County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Ireg).	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	---------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Thompson

Section: B

B	202 T	Square	bin floor -	0.000	11.80	12.60	51.50	0.00	0.00	0.00	51.500	0.000	51.5	119.5	6.20	6,536
B	202 B	Square	bin floor -top 51.5'	0.000	13.40	12.10	7.000	0.00	0.00	0.00	7.000	0.000	7.0	130.3	6.50	971
B	203 T	Square	bin floor -	0.000	11.80	12.10	51.50	0.00	0.00	0.00	51.500	0.000	51.5	114.8	6.20	6,279
B	203 B	Square	bin floor -top 51.5'	0.000	13.40	11.90	7.000	0.00	0.00	0.00	7.000	0.000	7.0	128.2	6.50	955
B	204	Square	bin floor -	0.000	12.50	12.10	49.00	0.00	0.00	0.00	49.000	0.000	49.0	121.6	6.50	6,345
B	205	Square	bin floor -	0.000	12.50	12.60	49.00	0.00	0.00	0.00	49.000	0.000	49.0	126.6	6.50	6,606
B	206	Square	bin floor -	0.000	12.50	12.30	49.00	0.00	0.00	0.00	49.000	0.000	49.0	123.6	6.50	6,450
B	207 T	Square	bin floor -	0.000	11.80	12.30	51.50	0.00	0.00	0.00	51.500	0.000	51.5	116.7	6.20	6,383
B	207 B	Square	bin floor - top 51.5'	0.000	13.40	11.90	7.000	0.00	0.00	0.00	7.000	0.000	7.0	128.2	6.50	955
B	208 T	Square	bin floor	0.000	11.80	12.60	51.50	0.00	0.00	0.00	51.500	0.000	51.5	119.5	6.20	6,536
B	208 B	Square	bin floor - top 51.5'	0.000	13.40	12.10	7.000	0.00	0.00	0.00	7.000	0.000	7.0	130.3	6.50	971
B	209 T	Square	bin floor -	0.000	11.80	12.10	51.50	0.00	0.00	0.00	51.500	0.000	51.5	114.8	6.20	6,279
B	209 B	Square	bin floor - top 51.5'	0.000	13.40	11.90	7.000	0.00	0.00	0.00	7.000	0.000	7.0	128.2	6.50	955
B	301	Peaked	eave at top of side wall	36.000	0.000	0.000	58.70	0.00	0.00	0.00	58.700	2.200	60.9	818.2	10.0	54,811

Bin count: 71

Facility: Thompson Section: B Total: 232,530

To Even: 233,000

Exam Date: 01/30/2008
 Examiner: 2

Thompson Farmers Co-Operative Elevator
 PO Box 327
 Thompson, ND
 County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Thompson

Section: C

	C	001	Round	top of slab	40.000	0.000	0.000	140.5	0.00	0.00	140.50	0.000	140.5	1010.2	10.0	156,126
	C	002	Round	top of slab	40.000	0.000	0.000	140.5	0.00	0.00	140.50	0.000	140.5	1010.2	10.0	156,126
	C	004	Irregular	eaves 13' from top to peak	55.900	8.339	8.339	114.0	0.00	0.00	114.00	0.000	114.0	55.9	4.80	6,679
	C	005	Irregular	eaves 13' from top to peak	121.10	12.27	12.27	125.8	0.00	0.00	125.80	0.000	125.8	121.1	6.50	16,224
	C	101	Peaked	eaves 13' from top to peak	48.000	0.000	0.000	69.40	0.00	0.00	69.400	3.400	72.8	1454.6	10.0	116,485
	C	102	Peaked	eaves 13' from top to peak	48.000	0.000	0.000	69.40	0.00	0.00	69.400	3.400	72.8	1454.6	10.0	116,485
	C	103	Peaked	get dimensions	48.000	0.000	0.000	69.40	0.00	0.00	69.400	3.400	72.8	1454.6	10.0	116,485
Added	C	201	Round	top of slab	46.000	0.000	0.000	150.0	0.00	0.00	150.00	0.000	150.0	1335.9	10.0	220,424
Added	C	202	Round	top of slab	46.000	0.000	0.000	150.0	0.00	0.00	150.00	0.000	150.0	1335.9	10.0	220,424
Added	C	400	Flat	eaves 20.3'	0.000	150.0	60.00	16.50	0.00	0.00	16.500	0.000	16.5	7234.7	10.0	131,310

Bin count: 10

Facility: Thompson Section: C Total:

1,256,768

To Even:

1,257,000

Overall Licensed Bin Capacity for:

Thompson Farmers Co-Operative Elevator

Bin count: 155

Licensed Capacity:

(includes pack)

1,818,164 Bu.

Licensed Capacity (to even):

(includes pack and section totals are rounded up to next highest 1000)

1,819,000 Bu.

THOMPSON FARMER CO-OP ELEVATOR COMPANY

Thompson ND

BNSF RAIL

Annex#2-2

Annex #2-1

Elevator #2

201	202	203
206	205	204
207	208	209


101	102	103
106	105	104
107	108	109

001	002	003	004
10	09	008	007
11	12	013	014
22	21	20	XX XX ML
			019
			18
			17

SECTION B

Office

SECTION B



THOMPSON FARMERS CO-OP ELEVATOR COMPANY
Thompson ND

BNSF Rail

Elevator #1

Annex #1


011	012	014	016	101	105	108	111	114	117	121	124	127		
					104							118	128	
09	08	013	017	020	021	102	106	109	112	115	119	122	125	129
06				022										
05	04	001	025	024	023	SECTION A								

Main Office

THOMPSON FARMERS CO-OP ELEVATOR CO.

Thompson ND

BNSF RAIL

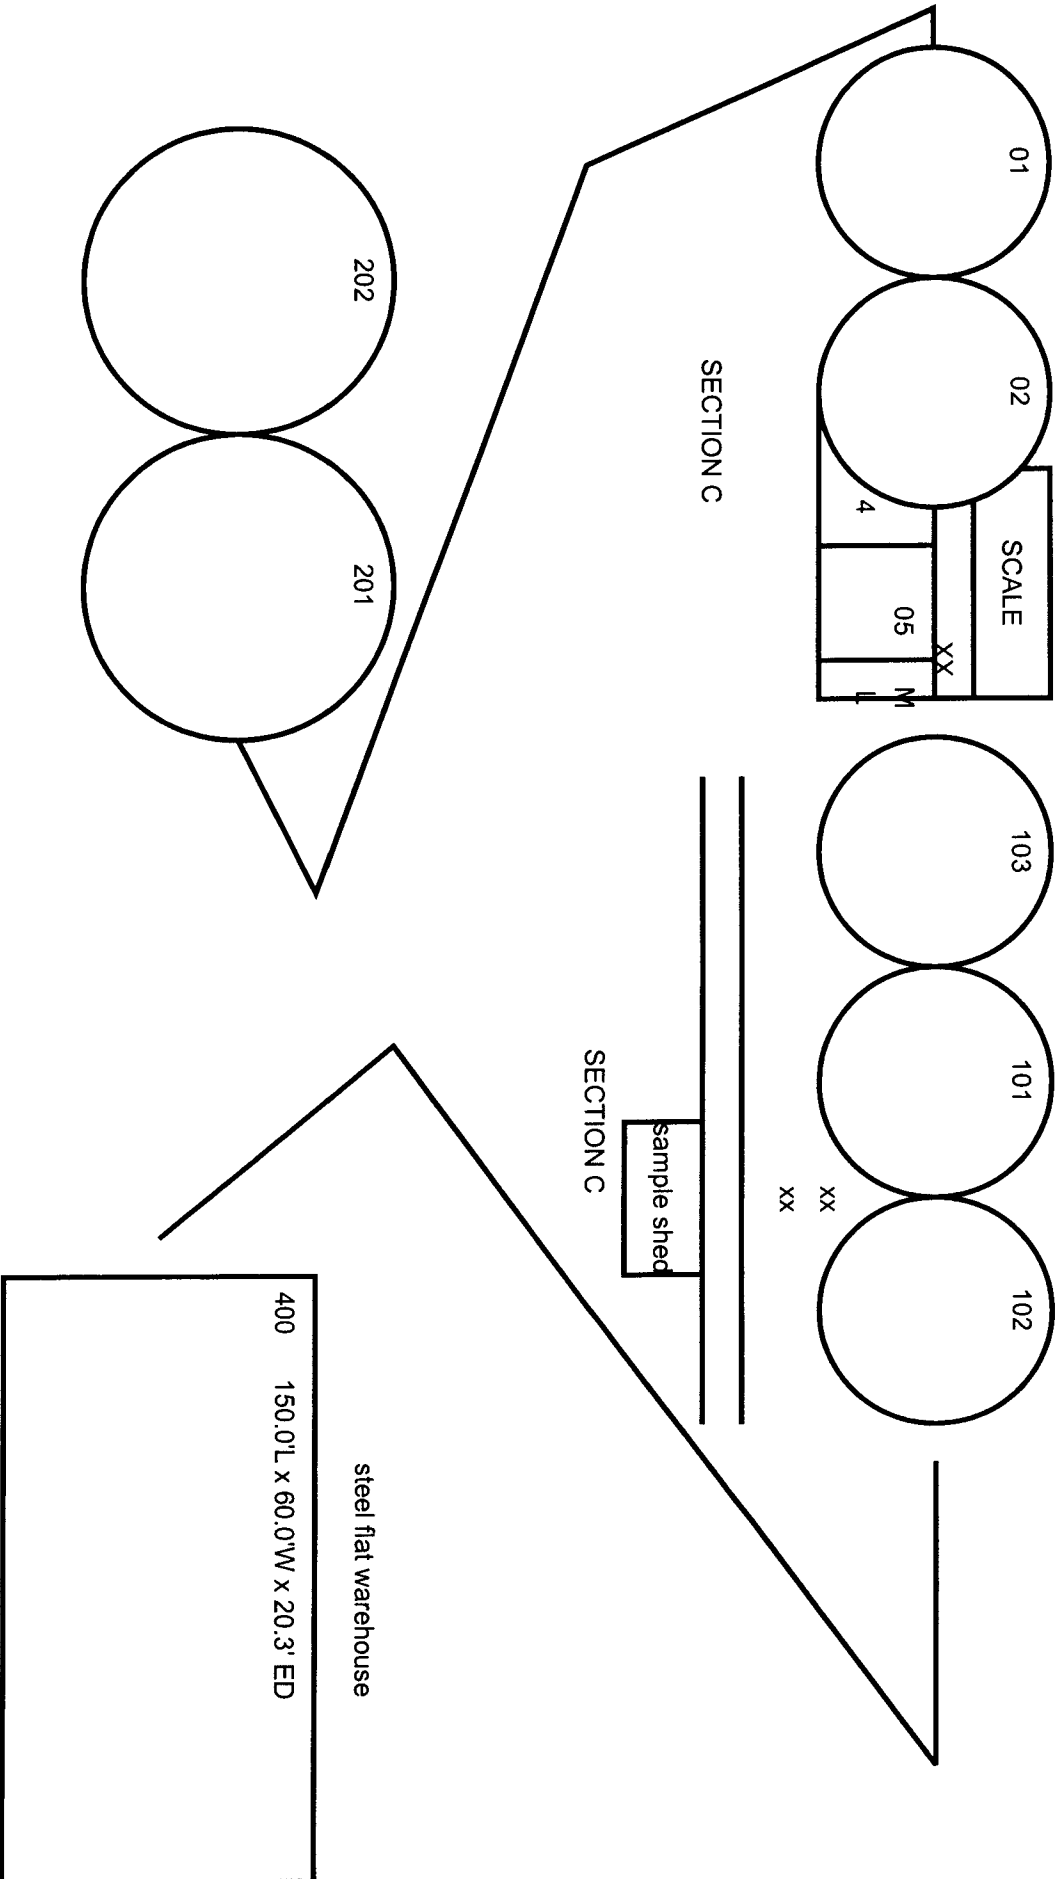

THOMPSON FARMERS CO-OP ELEVATOR CO.

Thompson ND


Section E

BNSE RAIL

113.8' L

Potato Warehouse

90.3' L

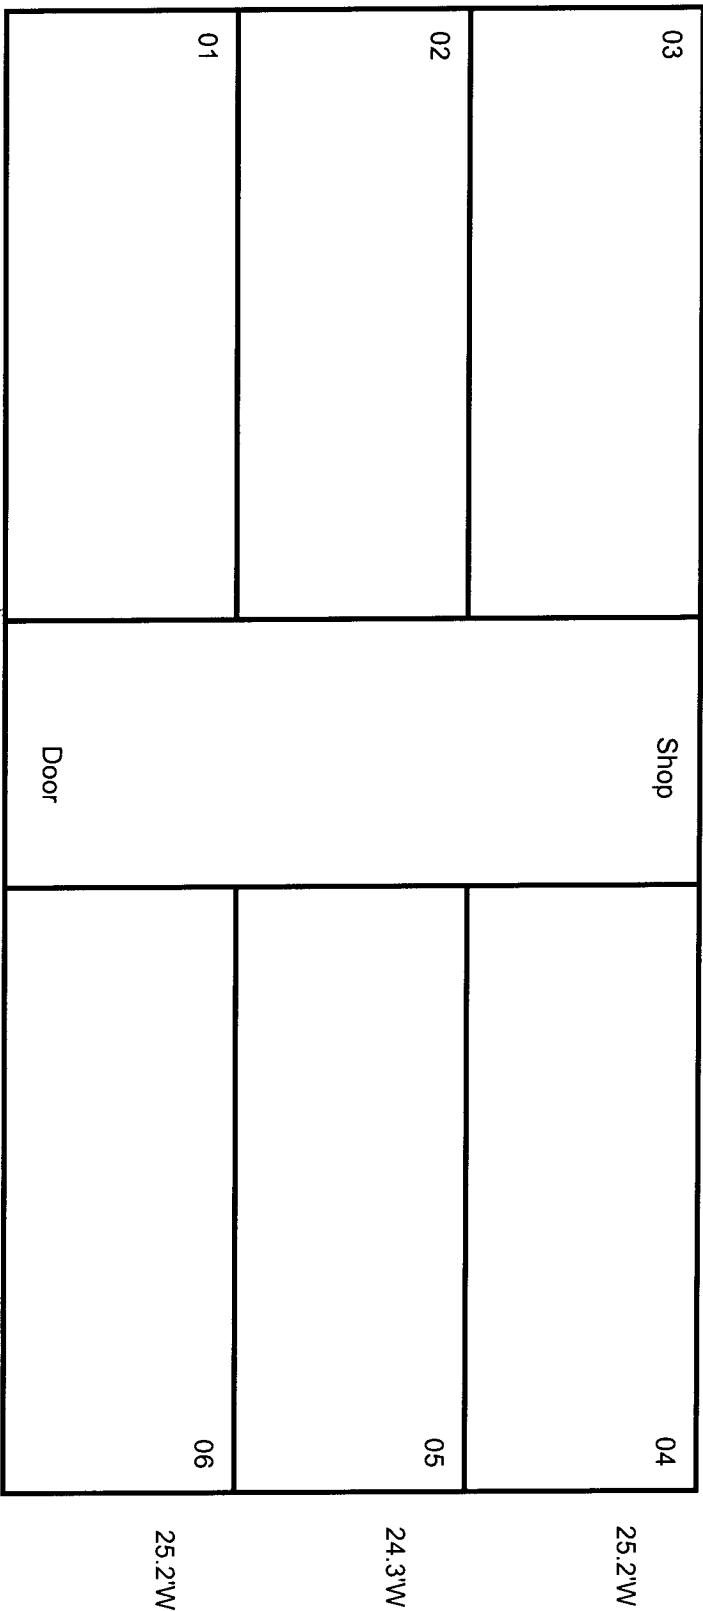

Section E

NOTE: Doors on north and south end Bins 1-3-4-6 are 13.1' floor to header

Bins 2 & 5 are 14.2' floor to header