

Exam Date: 11/12/2008

Fullerton Farmers Elevator

Page: 1

Examiner: 2

Box 56

Fullerton, ND

County:

Phone: 701-375-7251

CCC Number:

Location/Container Numbers/Comments	Section	Capacity
PART A - ADDITIONAL SPACE TO BE INCLUDED UNDER LICENSE		
ground 1	G	1,999,245
		Total: 1,999,245
PART B - SPACE TO BE DELETED UNDER LICENSE		
ground 2	G	1,496,575
		Total: 1,496,575
PART C - ALL SPACE TO BE INCLUDED UNDER LICENSE		
	A	384,000
	B	948,000
	D	1,043,000
	E	545,000
	G	2,000,000
		Total: 4,920,000
PART D - TOTAL CAPACITY BY FUNCTIONAL UNIT		
Fullerton 102	A B D E G	4,920,000
		Total: 4,920,000

Client ID: 541

NDPSC Bin Capacity Chart

11/12/2008 09:52:41 AM

Exam Date: 11/12/2008
Examiner: 2

Fullerton Farmers Elevator
Box 56
Fullerton, ND
County:

Page: 1

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg):	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Fullerton

Section: A

A	001	Square	floor over bins		0.000	12.30	6.900	45.00	0.00	0.00	45.000	0.000	45.0	68.2	5.20	3,229
A	004	Square	bin floor		0.000	9.200	3.500	42.00	0.00	0.00	42.000	0.000	42.0	25.9	2.50	1,115
A	005	Square	floor over bins		0.000	9.000	9.000	60.50	0.00	0.00	60.500	0.000	60.5	65.1	5.00	4,136
A	007	Square	floor over bins		0.000	12.30	9.000	46.00	0.00	0.00	46.000	0.000	46.0	89.0	5.80	4,331
A	008	Square	floor over bins		0.000	9.000	9.000	60.50	0.00	0.00	60.500	0.000	60.5	65.1	5.00	4,136
A	010	Square	floor over bins		0.000	9.200	6.900	46.00	0.00	0.00	46.000	0.000	46.0	51.0	4.50	2,452
A	012	Square	floor over bins		0.000	9.000	9.000	60.50	0.00	0.00	60.500	0.000	60.5	65.1	5.00	4,136
A	013	Square	floor over bins		0.000	9.200	6.900	46.00	0.00	0.00	46.000	0.000	46.0	51.0	4.50	2,452
A	017	Square	floor over bins		0.000	12.30	9.000	46.00	0.00	0.00	46.000	0.000	46.0	89.0	5.80	4,331
A	018	Square	floor over bins		0.000	12.30	6.900	45.00	0.00	0.00	45.000	0.000	45.0	68.2	5.20	3,229
A	020	Square	floor over bins		0.000	9.000	9.000	60.50	0.00	0.00	60.500	0.000	60.5	65.1	5.00	4,136
A	021	Square	floor over bins		0.000	9.200	4.000	42.00	0.00	0.00	42.000	0.000	42.0	29.6	2.50	1,274
A	101	Square	work floor		0.000	11.30	8.600	40.00	0.00	0.00	40.000	0.000	40.0	78.1	5.50	3,296
A	103	Square	work floor		0.000	9.000	5.300	28.00	0.00	0.00	28.000	0.000	28.0	38.3	3.00	1,104
A	104	Square	work floor		0.000	11.30	8.800	38.00	0.00	0.00	38.000	0.000	38.0	79.9	5.50	3,203
A	105	Square	work floor		0.000	8.900	5.300	28.00	0.00	0.00	28.000	0.000	28.0	37.9	3.00	1,093
A	107	Square	work floor		0.000	8.900	5.300	28.00	0.00	0.00	28.000	0.000	28.0	37.9	3.00	1,093
A	108	Square	work floor		0.000	11.30	8.800	38.00	0.00	0.00	38.000	0.000	38.0	79.9	5.50	3,203
A	109	Square	work floor		0.000	9.000	5.300	28.00	0.00	0.00	28.000	0.000	28.0	38.3	3.00	1,104
A	110	Square	work floor		0.000	11.30	9.000	40.00	0.00	0.00	40.000	0.000	40.0	81.8	5.50	3,452
A	111	Square	work floor		0.000	11.30	9.000	40.00	0.00	0.00	40.000	0.000	40.0	81.8	5.50	3,452

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Fullerton

A	112	Square	work floor		0.000	11.30	8.600	40.00	0.00	0.00	40.000	0.000	40.0	78.1	5.50	3,296
A	113	Square	work floor		0.000	8.700	5.300	29.00	0.00	0.00	29.000	0.000	29.0	37.1	3.00	1,108
A	201	Peaked	top of sidewall		30.000	0.000	0.000	58.80	0.00	0.00	58.800	1.800	60.6	568.2	9.00	37,532
A	202	Peaked	top of side wall		30.000	0.000	0.000	58.80	0.00	0.00	58.800	1.800	60.6	568.2	9.00	37,532
A	203	Peaked	top of sidewall		36.000	0.000	0.000	56.40	0.00	0.00	56.400	2.200	58.6	818.2	10.0	52,742
A	204	Peaked	top of side wall		36.000	0.000	0.000	56.40	0.00	0.00	56.400	2.200	58.6	818.2	10.0	52,742
A	205	Peaked	top of side wall		30.000	0.000	0.000	59.00	0.00	0.00	59.000	1.800	60.8	568.2	9.00	37,656
A	206	Peaked	top of side wall		33.000	0.000	0.000	59.00	0.00	0.00	59.000	2.000	61.0	687.5	9.50	45,922
A	207	Peaked	topo of sidewall		36.000	0.000	0.000	59.00	0.00	0.00	59.000	2.200	61.2	818.2	10.0	55,081
Bin count: 30													Facility: Fullerton Section: A Total:		383,568	
													To Even:		384,000	

Section: B

B	001	Peaked	topo of sidewall		91.800	0.000	0.000	59.30	0.00	0.00	59.300	6.400	65.7	5320.5	10.0	384,513
B	002	Peaked	topo of sidewall		62.300	0.000	0.000	59.30	0.00	0.00	59.300	4.400	63.7	2450.4	10.0	171,699
B	003	Peaked	topo of sidewall		91.800	0.000	0.000	59.30	0.00	0.00	59.300	6.400	65.7	5320.5	10.0	384,513
B	101	Peaked	topo of sidewall		15.000	0.000	0.000	19.50	3.70	0.00	23.200	0.900	24.1	142.1	5.50	3,613
B	102	Peaked	topo of sidewall		15.000	0.000	0.000	19.50	3.70	0.00	23.200	0.900	24.1	142.1	5.50	3,613
Bin count: 5													Facility: Fullerton Section: B Total:		947,951	
													To Even:		948,000	

Client ID: 541

NDPSC Bin Capacity Chart

11/12/2008 09:52:41 AM

Exam Date: 11/12/2008
Examiner: 2

Fullerton Farmers Elevator
Box 56
Fullerton, ND
County:

Page: 3

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Ireg).	Length	Width	Side wall	Add for Hopper	Dec. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	---------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Fullerton

Section: D

D		004	Peaked	top of sidewall	15.000	0.000	0.000	18.30	2.40	0.00	20.700	0.900	21.6	142.1	5.50	3,238
D		008	Peaked	top of sidewall	15.000	0.000	0.000	18.30	2.40	0.00	20.700	0.900	21.6	142.1	5.50	3,238
D		009	Peaked	top of sidewall	15.000	0.000	0.000	18.30	2.40	0.00	20.700	0.900	21.6	142.1	5.50	3,238
D		015	Peaked	top of sidewall	15.000	0.000	0.000	18.30	2.40	0.00	20.700	0.900	21.6	142.1	5.50	3,238
D		101	Peaked	top of sidewall	48.000	0.000	0.000	66.00	0.00	0.00	66.000	3.400	69.4	1454.6	10.0	111,044
D		102	Peaked	top of sidewall	48.000	0.000	0.000	66.00	0.00	0.00	66.000	3.400	69.4	1454.6	10.0	111,044
D		201	Peaked	top of sidewall	48.000	0.000	0.000	66.00	0.00	0.00	66.000	3.400	69.4	1454.6	10.0	111,044
D		202	Peaked	top of sidewall	48.000	0.000	0.000	66.00	0.00	0.00	66.000	3.400	69.4	1454.6	10.0	111,044
D		203	Peaked	top of sidewall	60.000	0.000	0.000	73.00	0.00	0.00	73.000	4.200	77.2	2272.9	10.0	193,015
D		204	Peaked	top of sidewall	78.000	0.000	0.000	84.00	0.00	0.00	84.000	5.500	89.5	3841.1	10.0	378,156
D		205	Peaked	top of sidewall	21.000	0.000	0.000	44.00	3.20	0.00	47.200	1.300	48.5	278.4	6.80	14,420
Bin count: 11																
Facility: Fullerton Section: D Total: 1,042,719																
To Even: 1,043,000																

Section: E

E		322	Peaked	top of sidewall	21.000	0.000	0.000	27.00	0.00	0.00	27.000	1.300	28.3	278.4	6.80	8,415
E		323	Peaked	top of sidewall	21.000	0.000	0.000	27.00	0.00	0.00	27.000	1.300	28.3	278.4	6.80	8,415
E		324	Peaked	top of sidewall	21.000	0.000	0.000	27.00	0.00	0.00	27.000	1.300	28.3	278.4	6.80	8,415
E		325	Peaked	top of sidewall	21.000	0.000	0.000	27.00	0.00	0.00	27.000	1.300	28.3	278.4	6.80	8,415
E		326	Peaked	top of sidewall	48.000	0.000	0.000	32.00	0.00	0.00	32.000	3.400	35.4	1454.6	10.0	56,642

Exam Date: 11/12/2008
 Examiner: 2

Fullerton Farmers Elevator
 Box 56
 Fullerton, ND
 County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Ireg).	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	---------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Fullerton

Section: E

E		327	Peaked	top of sidewall	48.000	0.000	0.000	32.00	0.00	0.00	32.000	3.400	35.4	1454.6	10.0	56,642
E		328	Peaked	top of sidewall	48.000	0.000	0.000	32.00	0.00	0.00	32.000	3.400	35.4	1454.6	10.0	56,642
E		330	Peaked	top of sidewall	48.000	0.000	0.000	32.10	0.00	0.00	32.100	3.400	35.5	1454.6	10.0	56,802
E		331	Peaked	top of sidewall	48.000	0.000	0.000	32.10	0.00	0.00	32.100	3.400	35.5	1454.6	10.0	56,802
E		332	Peaked	top of sidewall	48.000	0.000	0.000	32.10	0.00	0.00	32.100	3.400	35.5	1454.6	10.0	56,802
E		333	Peaked	top of sidewall	48.000	0.000	0.000	32.10	0.00	0.00	32.100	3.400	35.5	1454.6	10.0	56,802
E		334	Peaked	top of sidewall	48.000	0.000	0.000	32.10	0.00	0.00	32.100	3.400	35.5	1454.6	10.0	56,802
E		335	Peaked	top of sidewall	48.000	0.000	0.000	32.00	0.00	0.00	32.000	3.400	35.4	1454.6	10.0	56,642
Bin count: 13													Facility: Fullerton Section: E Total:		544,238	
													To Even:		545,000	

Section: G

Added	G	ground 1	Temporary	corn ground storage	30.000	427.0	150.0	22.10	0.00	0.00	22.100	13.20	35.3	51487.1	10.0	1,999,245
Bin count: 1													Facility: Fullerton Section: G Total:		1,999,245	
													To Even:		2,000,000	

Overall Licensed Bin Capacity for:

Fullerton Farmers Elevator

Bin count: 60

Licensed Capacity:
(Includes pack)


4,917,721 Bu.

Licensed Capacity (to even):


(Includes pack and section totals are rounded up to next highest 1000)

4,920,000 Bu.


FULLERTON FARMERS ELEVATOR
 FULLERTON N.D.
 SECTION A




Missouri Valley & Western RR

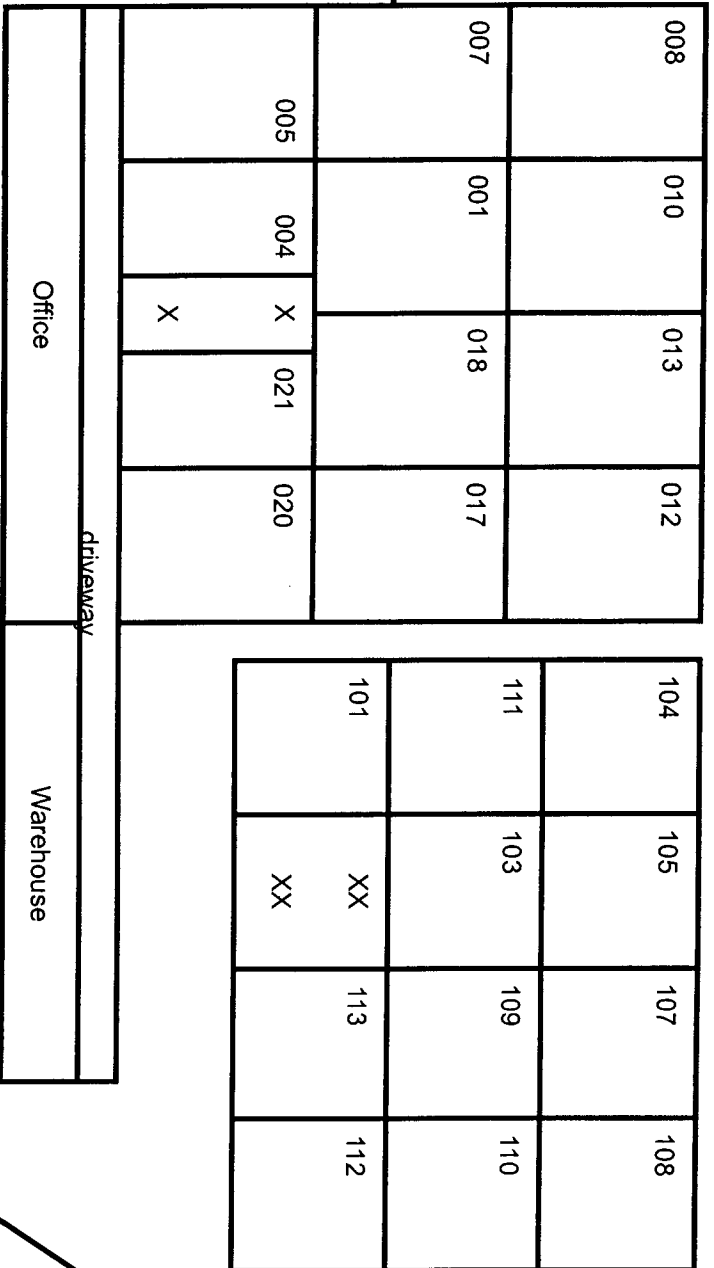


SECTION A

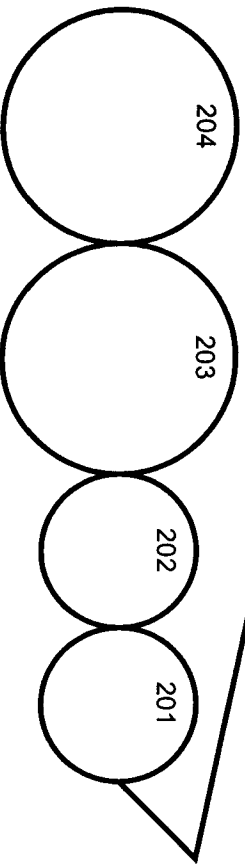


SECTION D 300' east



SECTION E
 3 blocks northeast





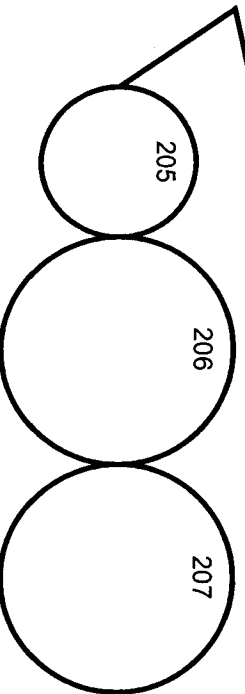


SECTION B 1/4 mile west



FULLERTON FARMERS ELEVATOR
FULLERTON ND
SECTION B
new construction

M.V.&W RAIL

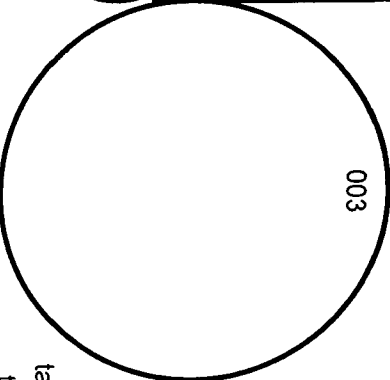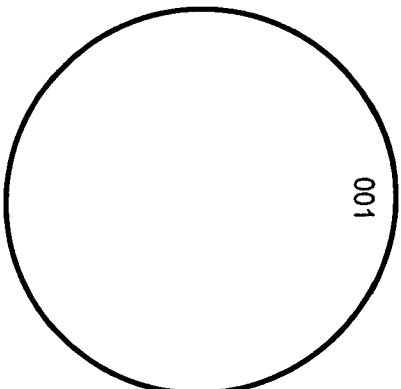

ZERO
tanks top of sidewall


tanks 1&3- 91.8' dia.- 59.3' sidewall
tank #2 - 62.3' dia - 59.3' sidewall
overhead hoppers- 15' dia-19.5' sidewall-11' hopper

driveway



GROUND STORAGE AREA


SECTION A 1/4 mile east

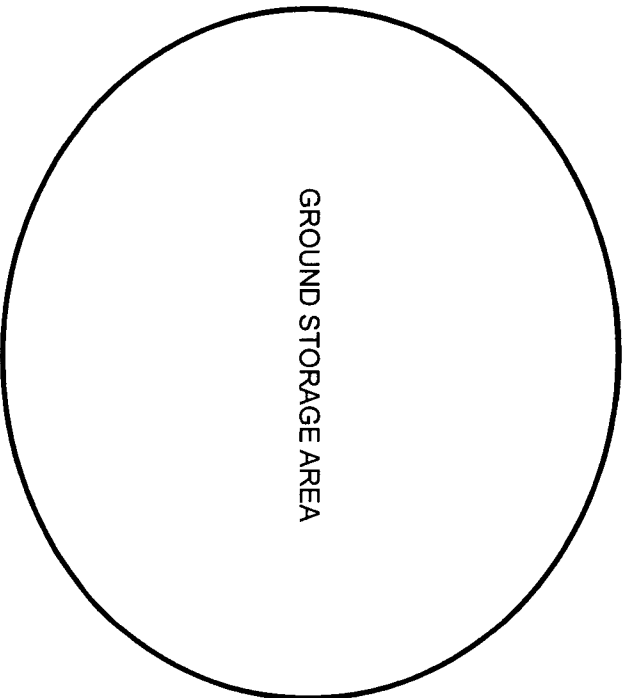

FULLERTON FARMERS ELEVATOR
FULLERTON N.D.

MWV RR

MWV RR

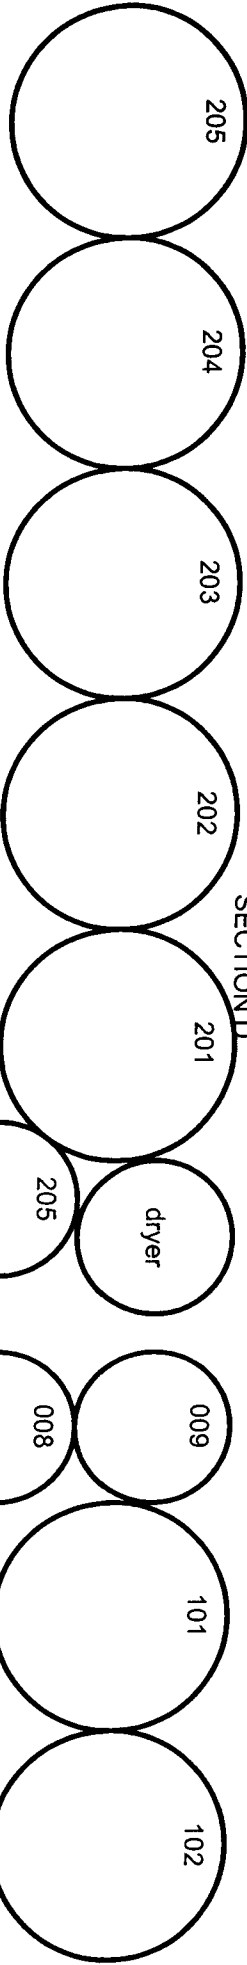


driveway


driveway

SECTION D
located 300' east of Section A

scale room



SECTION E

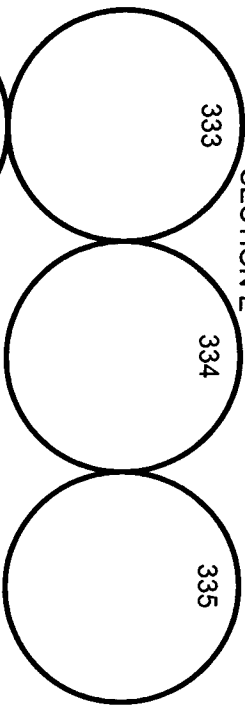

SECTION E
located 1/4 mile NE of Section A&D

