

Exam Date:11/03/2008

Wilton Farmers Union Elevator Co.

Page: 1

Examiner: 1

Box 188

Wilton , ND

County:

Phone: 701-734-6780

CCC Number:

Location/Container Numbers/Comments	Section	Capacity
PART A - ADDITIONAL SPACE TO BE INCLUDED UNDER LICENSE		
013	D	2,307
016	D	2,307
301	D	29,604
302	D	29,604
303	D	29,604
304	D	29,604
305	D	36,135
001	E	222
003	E	4,155
004 T	E	333
004 B	E	1,025
005	E	1,630
006	E	4,101
007	E	2,799
008	E	2,762
010	E	1,630
011	E	2,727
012	E	2,678
013	E	1,510
014	E	1,510
017	E	2,727
018	E	2,678
019	E	1,510
020	E	1,510
201	E	9,010
018 T	G	65
201	G	31,772
202	G	31,772
203	G	2,881
204	G	15,359
401	G	37,346
402	G	37,346
301	A	57,331
302	A	78,405
303	A	103,524
304	A	131,834
201	C	29,604
202	C	29,604
300-ground	G	99,920
500-ground	A	99,920
Total:		990,365

Location/Container Numbers/Comments	Section	Capacity
PART B - SPACE TO BE DELETED UNDER LICENSE		
401	A	1,792
402	A	1,792
		Total: 3,584
PART C - ALL SPACE TO BE INCLUDED UNDER LICENSE		
	A	745,000
	C	146,000
	D	487,000
	E	45,000
	G	326,000
		Total: 1,749,000
PART D - TOTAL CAPACITY BY FUNCTIONAL UNIT		
Regan 751	D E	532,000
Washburn 846	G	326,000
Wilton 59	A C	891,000
		Total: 1,749,000

Exam Date: 11/03/2008
 Examiner: 1

Wilton Farmers Union Elevator Co.
 Box 188
 Wilton, ND
 County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add	Ded.	Effective Depth	Add	Depth	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
									for Hopper	for Obs.		for Peak	for Capac.			

Facility: Regan

D	001	Square	work floor	0.000	8.000	6.800	56.00	0.00	0.00	56.000	0.000	56.0	56.0	43.7	3.50	2,533
D	002	Square	work floor	0.000	8.000	6.800	56.00	0.00	0.00	56.000	0.000	56.0	56.0	43.7	3.50	2,533
D	003	Square	work floor	0.000	8.000	7.900	56.00	0.00	0.00	56.000	0.000	56.0	56.0	50.8	4.50	2,973
D	004	Square	work floor	0.000	8.000	7.900	56.00	0.00	0.00	56.000	0.000	56.0	56.0	50.8	4.50	2,973
D	005	Square	work floor	0.000	8.000	7.900	56.00	0.00	0.00	56.000	0.000	56.0	56.0	50.8	4.50	2,973
D	006	Square	work floor	0.000	8.000	7.900	56.00	0.00	0.00	56.000	0.000	56.0	56.0	50.8	4.50	2,973
D	008 T	Square	work floor	0.000	8.600	16.10	58.00	0.00	0.00	58.000	0.000	58.0	58.0	111.3	6.20	6,855
D	008B	Square	work floor T58'	0.000	7.200	14.90	17.00	0.00	0.00	17.000	0.000	17.0	17.0	86.2	5.80	1,550
D	009	Square	work floor	0.000	5.800	7.900	53.00	0.00	0.00	53.000	0.000	53.0	53.0	36.8	3.00	2,009
D	010	Square	work floor	0.000	12.00	7.900	56.00	0.00	0.00	56.000	0.000	56.0	56.0	76.2	5.50	4,502
D	011	Square	work floor	0.000	5.800	6.800	56.00	0.00	0.00	56.000	0.000	56.0	56.0	31.7	2.50	1,819
D	012 T	Square	work floor	0.000	8.600	16.10	58.00	0.00	0.00	58.000	0.000	58.0	58.0	111.3	6.20	6,855
D	012B	Square	work floor T58'	0.000	7.200	14.90	17.00	0.00	0.00	17.000	0.000	17.0	17.0	86.2	5.80	1,550
Added	D	013	Irregular	work floor less 7 bpf for	40.000	7.054	7.054	56.00	0.00	0.00	56.000	0.000	56.0	40.0	3.00	2,307
D	014	Square	work floor	0.000	8.600	2.000	56.00	0.00	0.00	56.000	0.000	56.0	56.0	13.8	2.00	788
Added	D	016	Irregular	work floor less 7.0 bpf for	40.000	7.054	7.054	56.00	0.00	0.00	56.000	0.000	56.0	40.0	3.00	2,307
D	017 T	Square	work floor	0.000	8.600	16.10	58.00	0.00	0.00	58.000	0.000	58.0	58.0	111.3	6.20	6,855
D	017B	Square	work floor T58'	0.000	7.200	14.90	17.00	0.00	0.00	17.000	0.000	17.0	17.0	86.2	5.80	1,550
D	018	Square	work floor	0.000	5.800	10.70	56.00	0.00	0.00	56.000	0.000	56.0	56.0	49.9	4.20	2,911
D	019	Square	work floor	0.000	5.800	6.800	56.00	0.00	0.00	56.000	0.000	56.0	56.0	31.7	2.50	1,819
D	020	Square	work floor	0.000	5.800	10.70	56.00	0.00	0.00	56.000	0.000	56.0	56.0	49.9	4.20	2,911

Exam Date: 11/03/2008
 Examiner: 1

Wilton Farmers Union Elevator Co.
 Box 188
 Wilton, ND
 County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg).	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Regan

D		021	Square	work floor	0.000	3.700	5.000	46.00	0.00	0.00	46.000	0.000	46.0	14.9	2.00	699
D		022	Square	work floor	0.000	3.700	5.000	46.00	0.00	0.00	46.000	0.000	46.0	14.9	2.00	699
D		023	Square	work floor	0.000	8.600	3.000	56.00	0.00	0.00	56.000	0.000	56.0	20.7	2.00	1,182
D		024 T	Square	work floor	0.000	8.600	16.10	58.00	0.00	0.00	58.000	0.000	58.0	111.3	6.20	6,855
D		024B	Square	work floor T58'	0.000	7.200	14.90	17.00	0.00	0.00	17.000	0.000	17.0	86.2	5.80	1,550
D		025	Square	work floor	0.000	3.700	5.000	46.00	0.00	0.00	46.000	0.000	46.0	14.9	2.00	699
D		026	Square	work floor	0.000	8.000	7.900	56.00	0.00	0.00	56.000	0.000	56.0	50.8	4.50	2,973
D		027	Square	work floor	0.000	8.000	7.900	56.00	0.00	0.00	56.000	0.000	56.0	50.8	4.50	2,973
D		028	Square	work floor	0.000	8.000	7.900	56.00	0.00	0.00	56.000	0.000	56.0	50.8	4.50	2,973
D		029	Square	work floor	0.000	8.000	7.900	56.00	0.00	0.00	56.000	0.000	56.0	50.8	4.50	2,973
D		030	Square	work floor	0.000	8.000	6.800	56.00	0.00	0.00	56.000	0.000	56.0	43.7	3.50	2,533
D		031	Square	work floor	0.000	5.800	6.800	56.00	0.00	0.00	56.000	0.000	56.0	31.7	2.50	1,819
D		032	Square	work floor	0.000	8.000	6.800	56.00	0.00	0.00	56.000	0.000	56.0	43.7	3.50	2,533
D		033	Square	work floor	0.000	5.800	6.800	56.00	0.00	0.00	56.000	0.000	56.0	31.7	2.50	1,819
D		101 T	Square	work floor	0.000	3.600	14.40	26.00	0.00	0.00	26.000	0.000	26.0	41.7	3.50	1,122
D		101 M	Square	work floor T26'	0.000	14.80	14.40	40.00	0.00	0.00	40.000	0.000	40.0	171.3	7.00	7,332
D		101B	Square	work floor T26' M40'	0.000	12.40	14.40	9.000	0.00	0.00	9.000	0.000	9.0	143.5	6.80	1,380
D		102 T	Square	work floor	0.000	14.80	14.40	66.00	0.00	0.00	66.000	0.000	66.0	171.3	7.00	12,097
D		102B	Square	work floor T66'	0.000	12.40	14.40	9.000	0.00	0.00	9.000	0.000	9.0	143.5	6.80	1,380
D		103 T	Square	work floor	0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D		103B	Square	work floor T66'	0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399

Exam Date: 11/03/2008
 Examiner: 1

Wilton Farmers Union Elevator Co.
 Box 188
 Wilton, ND
 County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg).	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Regan

D		104 T	Square	work floor	0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D		104B	Square	work floor T66'	0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399
D		105 T	Square	work floor	0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D		105B	Square	work floor	0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399
D		106 T	Square	work floor	0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D		106B	Square	work floor T66'	0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399
D		107 T	Square	work floor	0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D		107B	Square	work floor T66'	0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399
D		108 T	Square	work floor	0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D		108B	Square	work floor T66'	0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399
D		109 T	Square	work floor	0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D		109B	Square	work floor T66'	0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399
D		110 T	Square	work floor	0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D		110B	Square	work floor T66'	0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399
D		111 T	Square	work floor	0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D		111B	Square	work floor T66'	0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399
D		112 T	Square	work floor	0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D		112B	Square	work floor T66'	0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399
D		113 T	Square	work floor	0.000	14.80	14.40	66.00	0.00	0.00	66.000	0.000	66.0	171.3	7.00	12,097
D		113B	Square	work floor T66'	0.000	12.40	14.40	9.000	0.00	0.00	9.000	0.000	9.0	143.5	6.80	1,380
D		114 T	Square	work floor	0.000	14.80	14.40	66.00	0.00	0.00	66.000	0.000	66.0	171.3	7.00	12,097

Exam Date: 11/03/2008
 Examiner: 1

Wilton Farmers Union Elevator Co.
 Box 188
 Wilton, ND
 County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Regan

Section: D

D		114B	Square	work floor T66'	0.000	12.40	14.40	9.000	0.00	0.00	9.000	0.000	9.0	143.5	6.80	1,380
D		116	Square	work floor	0.000	10.80	4.800	25.00	0.00	0.00	25.000	0.000	25.0	41.7	3.50	1,080
D		117	Square	work floor	0.000	10.80	4.400	25.00	0.00	0.00	25.000	0.000	25.0	38.2	3.00	984
D		118	Square	work floor	0.000	10.80	4.400	25.00	0.00	0.00	25.000	0.000	25.0	38.2	3.00	984
D		201	Square	work floor	0.000	6.000	11.30	46.50	0.00	0.00	46.500	0.000	46.5	54.5	4.50	2,648
D		202	Square	work floor	0.000	11.50	11.30	56.00	0.00	0.00	56.000	0.000	56.0	104.5	6.00	6,203
D		203	Square	work floor	0.000	11.50	11.70	56.00	0.00	0.00	56.000	0.000	56.0	108.2	6.20	6,435
D		204	Square	work floor	0.000	11.50	11.30	56.00	0.00	0.00	56.000	0.000	56.0	104.5	6.00	6,203
D		205	Square	work floor	0.000	6.000	11.30	46.50	0.00	0.00	46.500	0.000	46.5	54.5	4.50	2,648
D		206	Square	work floor	0.000	11.50	11.30	56.00	0.00	0.00	56.000	0.000	56.0	104.5	6.00	6,203
D		207	Square	work floor	0.000	6.000	11.70	46.50	0.00	0.00	46.500	0.000	46.5	56.4	4.80	2,749
D		208	Square	work floor	0.000	11.50	11.70	56.00	0.00	0.00	56.000	0.000	56.0	108.2	6.20	6,435
D		209	Square	work floor	0.000	11.50	11.30	56.00	0.00	0.00	56.000	0.000	56.0	104.5	6.00	6,203
Added	D	301	Peaked	top of sidewall	30.000	0.000	0.000	46.00	0.00	0.00	46.000	1.800	47.8	568.2	9.00	29,604
Added	D	302	Peaked	top of sidewall	30.000	0.000	0.000	46.00	0.00	0.00	46.000	1.800	47.8	568.2	9.00	29,604
Added	D	303	Peaked	top of sidewall	30.000	0.000	0.000	46.00	0.00	0.00	46.000	1.800	47.8	568.2	9.00	29,604
Added	D	304	Peaked	top of sidewall	30.000	0.000	0.000	46.00	0.00	0.00	46.000	1.800	47.8	568.2	9.00	29,604
Added	D	305	Peaked	top of sidewall	33.000	0.000	0.000	46.00	0.00	0.00	46.000	2.000	48.0	687.5	9.50	36,135

Bin count: 81

Facility: Regan Section: D Total: 486,067

To Even: 487,000

Exam Date: 11/03/2008
Examiner: 1

Wilton Farmers Union Elevator Co.
Box 188
Wilton, ND
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg):	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Regan

Section: E

Added	E	001	Irregular	work floor	14.500	4.247	4.247	15.00	0.00	0.00	15.000	0.000	15.0	14.5	2.00	222
Added	E	003	Irregular	work floor	68.100	9.204	9.204	58.00	0.00	0.00	58.000	0.000	58.0	68.1	5.20	4,155
Added	E	004 T	Irregular	work floor	21.700	5.196	5.196	15.00	0.00	0.00	15.000	0.000	15.0	21.7	2.00	333
Added	E	004 B	Irregular	work floor=- top 15'	39.800	7.036	7.036	25.00	0.00	0.00	25.000	0.000	25.0	39.8	3.00	1,025
Added	E	005	Irregular	work floor	38.600	6.930	6.930	41.00	0.00	0.00	41.000	0.000	41.0	38.6	3.00	1,630
Added	E	006	Irregular	work floor	67.200	9.143	9.143	58.00	0.00	0.00	58.000	0.000	58.0	67.2	5.20	4,101
Added	E	007	Irregular	work floor	46.400	7.597	7.597	58.00	0.00	0.00	58.000	0.000	58.0	46.4	4.00	2,799
Added	E	008	Irregular	work floor	45.800	7.548	7.548	58.00	0.00	0.00	58.000	0.000	58.0	45.8	4.00	2,762
Added	E	010	Irregular	work floor	38.600	6.930	6.930	41.00	0.00	0.00	41.000	0.000	41.0	38.6	3.00	1,630
Added	E	011	Irregular	work floor	45.200	7.499	7.499	58.00	0.00	0.00	58.000	0.000	58.0	45.2	4.00	2,727
Added	E	012	Irregular	work floor	44.600	7.449	7.449	58.00	0.00	0.00	58.000	0.000	58.0	44.6	3.50	2,678
Added	E	013	Irregular	work floor	37.600	6.839	6.839	39.00	0.00	0.00	39.000	0.000	39.0	37.6	3.00	1,510
Added	E	014	Irregular	work floor	37.600	6.839	6.839	39.00	0.00	0.00	39.000	0.000	39.0	37.6	3.00	1,510
Added	E	017	Irregular	work floor	45.200	7.499	7.499	58.00	0.00	0.00	58.000	0.000	58.0	45.2	4.00	2,727
Added	E	018	Irregular	work floor	44.600	7.449	7.449	58.00	0.00	0.00	58.000	0.000	58.0	44.6	3.50	2,678
Added	E	019	Irregular	work floor	37.600	6.839	6.839	39.00	0.00	0.00	39.000	0.000	39.0	37.6	3.00	1,510
Added	E	020	Irregular	work floor	37.600	6.839	6.839	39.00	0.00	0.00	39.000	0.000	39.0	37.6	3.00	1,510
Added	E	201	Peaked	top of sidewall	21.000	0.000	0.000	29.00	0.00	0.00	29.000	1.300	30.3	278.4	6.80	9,010

Bin count: 18

Facility: Regan Section: E Total: 44,517

To Even: 45,000

Exam Date: 11/03/2008
 Examiner: 1

Wilton Farmers Union Elevator Co.
 Box 188
 Wilton, ND
 County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg).	Length	Width	Side wall	Add for Hopper	Ded. for Obs.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack

Facility: Washburn

Section: G

G	000TB	Square	work floor	0.000	4.900	8.200	10.00	0.00	0.00	10.000	0.000	10.0	32.3	2.50	331
G	002	Square	work floor	0.000	4.600	7.000	50.00	0.00	0.00	50.000	0.000	50.0	25.9	2.50	1,327
G	003	Square	work floor	0.000	9.300	3.400	48.00	0.00	0.00	48.000	0.000	48.0	25.4	2.50	1,249
G	004	Square	work floor	0.000	9.300	11.20	66.00	0.00	0.00	66.000	0.000	66.0	83.7	5.80	5,844
G	005	Square	work floor	0.000	10.00	5.700	49.00	0.00	0.00	49.000	0.000	49.0	45.8	4.00	2,334
G	006 T	Square	work floor	0.000	10.00	5.100	49.00	0.00	0.00	49.000	0.000	49.0	41.0	3.00	2,069
G	006B	Square	work floor T49'	0.000	10.00	11.20	17.00	0.00	0.00	17.000	0.000	17.0	90.0	5.80	1,619
G	008	Square	work floor	0.000	9.400	11.20	66.00	0.00	0.00	66.000	0.000	66.0	84.6	5.80	5,908
G	009 T	Square	work floor	0.000	5.100	6.700	12.00	0.00	0.00	12.000	0.000	12.0	27.5	2.50	338
G	009B	Square	work floor T12'	0.000	5.100	6.700	38.00	0.00	0.00	38.000	0.000	38.0	27.5	2.50	1,071
G	010	Square	work floor	0.000	9.400	6.700	49.00	0.00	0.00	49.000	0.000	49.0	50.6	4.50	2,591
G	013	Square	work floor	0.000	9.400	7.000	49.00	0.00	0.00	49.000	0.000	49.0	52.9	4.50	2,709
G	014	Square	work floor	0.000	4.600	6.700	50.00	0.00	0.00	50.000	0.000	50.0	24.8	2.50	1,271
G	015	Square	work floor	0.000	9.400	11.20	66.00	0.00	0.00	66.000	0.000	66.0	84.6	5.80	5,908
G	016	Square	work floor	0.000	10.00	5.700	49.00	0.00	0.00	49.000	0.000	49.0	45.8	4.00	2,334
Added	G 018 T	Irregular	work floor	5.300	2.568	2.568	12.00	0.00	0.00	12.000	0.000	12.0	5.3	2.00	65
G	018B	Square	work floor T12'	0.000	5.100	7.000	38.00	0.00	0.00	38.000	0.000	38.0	28.7	2.50	1,118
G	019	Square	work floor	0.000	10.00	5.100	49.00	0.00	0.00	49.000	0.000	49.0	41.0	3.00	2,069
G	020	Square	work floor	0.000	4.700	5.100	48.00	0.00	0.00	48.000	0.000	48.0	19.3	2.00	945
G	021 T	Square	work floor	0.000	4.700	5.700	48.00	0.00	0.00	48.000	0.000	48.0	21.5	2.00	1,053
G	021B	Square	work floor T48'	0.000	9.300	11.20	18.00	0.00	0.00	18.000	0.000	18.0	83.7	5.80	1,594

Exam Date: 11/03/2008
Examiner: 1Wilton Farmers Union Elevator Co.
Box 188
Wilton, ND
County:

Page: 7

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Decl. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	-------------------------------	--------	-------	--------------	----------------------	-----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

Facility: Washburn

Section: G

Added	G	023	Square	work floor	0.000	4.300	5.100	48.00	0.00	0.00	48.000	0.000	48.0	17.6	2.00	862
Added	G	024	Square	work floor	0.000	4.300	5.700	48.00	0.00	0.00	48.000	0.000	48.0	19.7	2.00	965
Added	G	025	Square	work floor	0.000	9.300	3.400	48.00	0.00	0.00	48.000	0.000	48.0	25.4	2.50	1,249
Added	G	102	Square	work floor	0.000	9.500	5.000	25.00	0.00	0.00	25.000	0.000	25.0	38.2	3.00	984
Added	G	104	Square	work floor	0.000	9.700	5.500	28.00	0.00	0.00	28.000	0.000	28.0	42.9	3.50	1,243
Added	G	105	Square	work floor	0.000	9.500	8.200	42.00	0.00	0.00	42.000	0.000	42.0	62.6	5.00	2,760
Added	G	106	Square	work floor	0.000	9.700	5.500	28.00	0.00	0.00	28.000	0.000	28.0	42.9	3.50	1,243
Added	G	107	Square	work floor	0.000	9.700	8.200	42.00	0.00	0.00	42.000	0.000	42.0	63.9	5.00	2,818
Added	G	108 T	Square	work floor	0.000	4.500	8.200	10.00	0.00	0.00	10.000	0.000	10.0	29.7	2.50	304
Added	G	108B	Square	work floor T10'	0.000	9.500	8.200	32.00	0.00	0.00	32.000	0.000	32.0	62.6	5.00	2,103
Added	G	109	Square	work floor	0.000	9.400	8.200	42.00	0.00	0.00	42.000	0.000	42.0	62.0	4.80	2,729
Added	G	111	Square	work floor	0.000	9.400	5.500	25.00	0.00	0.00	25.000	0.000	25.0	41.6	3.50	1,076
Added	G	112	Square	work floor	0.000	9.400	8.200	42.00	0.00	0.00	42.000	0.000	42.0	62.0	4.80	2,729
Added	G	114	Square	work floor	0.000	9.400	5.500	25.00	0.00	0.00	25.000	0.000	25.0	41.6	3.50	1,076
Added	G	115	Square	work floor	0.000	9.700	8.200	42.00	0.00	0.00	42.000	0.000	42.0	63.9	5.00	2,818
Added	G	201	Peaked	top of sidewall	30.000	0.000	0.000	49.50	0.00	0.00	49.500	1.800	51.3	568.2	9.00	31,772
Added	G	202	Peaked	top of sidewall	30.000	0.000	0.000	49.50	0.00	0.00	49.500	1.800	51.3	568.2	9.00	31,772
Added	G	203	Peaked	top of sidewall	13.500	0.000	0.000	23.00	0.00	0.00	23.000	0.800	23.8	115.1	5.20	2,881
Added	G	204	Peaked	top of sidewall	30.000	0.000	0.000	23.00	0.00	0.00	23.000	1.800	24.8	568.2	9.00	15,359
Added	G	300-ground	Temporary	ground storage	10.000	200.0	50.00	6.700	0.00	0.00	6.700	4.600	11.3	8038.6	10.0	99,920
Added	G	401	Peaked	top of sidewall	30.000	0.000	0.000	58.50	0.00	0.00	58.500	1.800	60.3	568.2	9.00	37,346

Client ID: 128

NDPSC Bin Capacity Chart

11/06/2008 09:22:05 AM

Exam Date: 11/03/2008

Wilton Farmers Union Elevator Co.

Box 188

Wilton, ND

County:

Page: 8

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Ireg):	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	---------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Washburn

Added	G	402	Peaked	top of sidewall	30.000	0.000	0.000	58.50	0.00	0.00	58.500	1.800	60.3	568.2	9.00	37,346
-------	---	-----	--------	-----------------	--------	-------	-------	-------	------	------	--------	-------	------	-------	------	--------

Bin count: 43

Facility: Washburn Section: G Total: 325,102

To Even: 326,000

Section: G

Exam Date: 11/03/2008
 Examiner: 1

Wilton Farmers Union Elevator Co.
 Box 188
 Wilton, ND
 County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Ireg).	Length	Width	Side wall	Add for Hopper	Decl. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	---------------------------	--------	-------	-----------	----------------	-----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Wilton

Section: A

A	000CB		Square	work floor	0.000	2.800	4.000	54.00	0.00	0.00	54.000	0.000	54.0	9.0	2.00	496
A	001		Square	work floor	0.000	3.900	3.000	53.00	0.00	0.00	53.000	0.000	53.0	9.4	2.00	508
A	002		Square	work floor	0.000	8.000	4.000	54.00	0.00	0.00	54.000	0.000	54.0	25.7	2.50	1,423
A	003		Square	work floor	0.000	12.00	5.200	56.00	0.00	0.00	56.000	0.000	56.0	50.2	4.50	2,937
A	004 T		Square	work floor	0.000	11.20	10.80	53.00	0.00	0.00	53.000	0.000	53.0	97.2	6.00	5,461
A	004B		Square	work floor T53'	0.000	10.40	10.20	20.00	0.00	0.00	20.000	0.000	20.0	85.3	5.80	1,805
A	005 T		Square	work floor	0.000	13.20	9.800	65.00	0.00	0.00	65.000	0.000	65.0	104.0	6.00	7,166
A	005B		Square	work floor T65'	0.000	14.00	9.600	8.000	0.00	0.00	8.000	0.000	8.0	108.0	6.20	918
A	006 T		Square	work floor	0.000	8.200	6.400	53.00	0.00	0.00	53.000	0.000	53.0	42.2	3.50	2,315
A	006B		Square	work floor T53'	0.000	8.200	9.800	10.00	0.00	0.00	10.000	0.000	10.0	64.6	5.00	678
A	007		Square	work floor	0.000	12.00	5.200	56.00	0.00	0.00	56.000	0.000	56.0	50.2	4.50	2,937
A	008		Square	work floor	0.000	3.900	3.000	53.00	0.00	0.00	53.000	0.000	53.0	9.4	2.00	508
A	009 T		Square	work floor	0.000	13.20	9.800	65.00	0.00	0.00	65.000	0.000	65.0	104.0	6.00	7,166
A	009B		Square	work floor T65'	0.000	14.00	9.600	8.000	0.00	0.00	8.000	0.000	8.0	108.0	6.20	918
A	010		Square	work floor	0.000	12.00	6.800	54.00	0.00	0.00	54.000	0.000	54.0	65.6	5.00	3,719
A	011 T		Square	work floor	0.000	11.20	10.80	53.00	0.00	0.00	53.000	0.000	53.0	97.2	6.00	5,461
A	011B		Square	work floor T53'	0.000	10.40	10.20	20.00	0.00	0.00	20.000	0.000	20.0	85.3	5.80	1,805
A	013 T		Square	work floor	0.000	2.500	6.800	22.00	0.00	0.00	22.000	0.000	22.0	13.7	2.00	307
A	013B		Square	work floor T22'	0.000	11.20	6.800	30.00	0.00	0.00	30.000	0.000	30.0	61.2	4.80	1,924
A	014		Square	work floor	0.000	11.20	6.800	52.00	0.00	0.00	52.000	0.000	52.0	61.2	4.80	3,335
A	015 T		Square	work floor	0.000	13.20	9.600	64.00	0.00	0.00	64.000	0.000	64.0	101.9	6.00	6,913

Exam Date: 11/03/2008
 Examiner: 1

Wilton Farmers Union Elevator Co.
 Box 188
 Wilton, ND
 County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Wilton

Section: A

A	015B		Square	work floor T64	0.000	14.00	9.100	7.000	0.00	0.00	7.000	0.000	7.0	102.4	6.00	760
A	016		Square	work floor	0.000	12.00	6.800	54.00	0.00	0.00	54.000	0.000	54.0	65.6	5.00	3,719
A	018		Square	work floor	0.000	8.200	9.600	64.00	0.00	0.00	64.000	0.000	64.0	63.3	5.00	4,254
A	020 T		Square	work floor	0.000	7.200	9.600	54.00	0.00	0.00	54.000	0.000	54.0	55.6	4.80	3,146
A	020 M		Square	work floor T54'	0.000	13.20	9.600	10.00	0.00	0.00	10.000	0.000	10.0	101.9	6.00	1,080
A	020B		Square	work floor T54' M10	0.000	14.00	9.100	7.000	0.00	0.00	7.000	0.000	7.0	102.4	6.00	760
A	021 T		Square	work floor	0.000	13.20	9.600	64.00	0.00	0.00	64.000	0.000	64.0	101.9	6.00	6,913
A	021B		Square	work floor T64'	0.000	14.00	9.600	7.000	0.00	0.00	7.000	0.000	7.0	108.0	6.20	803
A	022		Square	work floor	0.000	5.600	4.600	54.00	0.00	0.00	54.000	0.000	54.0	20.7	2.00	1,140
A	023		Square	work floor	0.000	5.600	4.600	54.00	0.00	0.00	54.000	0.000	54.0	20.7	2.00	1,140
A	024		Square	work floor	0.000	11.20	4.000	52.00	0.00	0.00	52.000	0.000	52.0	36.0	3.00	1,928
A	024A		Square	work floor	0.000	8.200	9.600	64.00	0.00	0.00	64.000	0.000	64.0	63.3	5.00	4,254
A	025 T		Square	work floor	0.000	13.20	9.600	64.00	0.00	0.00	64.000	0.000	64.0	101.9	6.00	6,913
A	025B		Square	work floor T64'	0.000	14.00	9.500	7.000	0.00	0.00	7.000	0.000	7.0	106.9	6.20	794
A	026 T		Square	work floor	0.000	13.20	9.600	64.00	0.00	0.00	64.000	0.000	64.0	101.9	6.00	6,913
A	026B		Square	work floor T64'	0.000	14.00	9.500	7.000	0.00	0.00	7.000	0.000	7.0	106.9	6.20	794
A	027 T		Square	work floor	0.000	13.20	9.600	64.00	0.00	0.00	64.000	0.000	64.0	101.9	6.00	6,913
A	027B		Square	work floor T64'	0.000	14.00	9.600	7.000	0.00	0.00	7.000	0.000	7.0	108.0	6.20	803
A	028		Square	work floor	0.000	8.200	9.600	64.00	0.00	0.00	64.000	0.000	64.0	63.3	5.00	4,254
A	031 T		Square	work floor	0.000	17.20	15.40	61.00	0.00	0.00	61.000	0.000	61.0	212.9	7.00	13,896
A	031B		Square	work floor	0.000	15.00	15.40	9.000	0.00	0.00	9.000	0.000	9.0	185.7	7.00	1,788

Exam Date: 11/03/2008
 Examiner: 1

Wilton Farmers Union Elevator Co.
 Box 188
 Wilton, ND
 County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg).	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack

Facility: Wilton

Section: A

A	032 T	Square	work floor	0.000	17.20	15.40	61.00	0.00	0.00	61.000	0.000	61.0	212.9	7.00	13,896
A	032B	Square	work floor T6'1"	0.000	15.00	15.40	9.000	0.00	0.00	9.000	0.000	9.0	185.7	7.00	1,788
A	033 T	Square	work floor	0.000	17.20	15.50	61.00	0.00	0.00	61.000	0.000	61.0	214.3	7.00	13,987
A	033B	Square	work floor T6'1"	0.000	15.00	15.50	9.000	0.00	0.00	9.000	0.000	9.0	186.9	7.00	1,800
A	034 T	Square	work floor	0.000	17.20	15.50	61.00	0.00	0.00	61.000	0.000	61.0	214.3	7.00	13,987
A	034B	Square	work floor T6'1"	0.000	15.00	15.50	9.000	0.00	0.00	9.000	0.000	9.0	186.9	7.00	1,800
A	035 T	Square	work floor	0.000	17.20	15.60	61.00	0.00	0.00	61.000	0.000	61.0	215.7	7.00	14,079
A	035B	Square	work floor T6'1"	0.000	15.00	15.60	9.000	0.00	0.00	9.000	0.000	9.0	188.1	7.00	1,812
A	036 T	Square	work floor	0.000	17.20	15.60	61.00	0.00	0.00	61.000	0.000	61.0	215.7	7.00	14,079
A	036B	Square	work floor T6'1"	0.000	15.00	15.60	9.000	0.00	0.00	9.000	0.000	9.0	188.1	7.00	1,812
A	037 T	Square	work floor	0.000	17.20	15.50	61.00	0.00	0.00	61.000	0.000	61.0	214.3	7.00	13,987
A	037B	Square	work floor T6'1"	0.000	15.00	15.50	9.000	0.00	0.00	9.000	0.000	9.0	186.9	7.00	1,800
A	038 T	Square	work floor	0.000	17.20	15.50	61.00	0.00	0.00	61.000	0.000	61.0	214.3	7.00	13,987
A	038B	Square	work floor T6'1"	0.000	15.00	15.50	9.000	0.00	0.00	9.000	0.000	9.0	186.9	7.00	1,800
A	039 T	Square	work floor	0.000	17.20	15.40	61.00	0.00	0.00	61.000	0.000	61.0	212.9	7.00	13,896
A	039B	Square	work floor T6'1"	0.000	15.00	15.40	9.000	0.00	0.00	9.000	0.000	9.0	185.7	7.00	1,788
A	040 T	Square	work floor	0.000	17.20	15.40	61.00	0.00	0.00	61.000	0.000	61.0	212.9	7.00	13,896
A	040B	Square	work floor T6'1"	0.000	15.00	15.40	9.000	0.00	0.00	9.000	0.000	9.0	185.7	7.00	1,788
Added	A 301	Peaked	top side wall	36.000	0.000	0.000	61.50	0.00	0.00	61.500	2.200	63.7	818.2	10.0	57,331
Added	A 302	Peaked	top side wall	42.000	0.000	0.000	61.50	0.00	0.00	61.500	2.500	64.0	1113.7	10.0	78,405
Added	A 303	Peaked	top side wall	48.000	0.000	0.000	61.30	0.00	0.00	61.300	3.400	64.7	1454.6	10.0	103,524

Exam Date: 11/03/2008
 Examiner: 1

Wilton Farmers Union Elevator Co.
 Box 188
 Wilton, ND
 County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Wilton

Section: A

Added	A	304	Peaked	top side wall	54.000	0.000	0.000	61.30	0.00	0.00	61.300	3.800	65.1	1841.0	10.0	131,834
Added	A	500-ground	Temporary	ground storage	10.000	200.0	50.00	6.700	0.00	0.00	6.700	4.600	11.3	8038.6	10.0	99,920

Bin count: 65 Facility: Wilton Section: A Total: 744,661

To Even: 745,000

Section: C

C	002	Square	work floor	0.000	9.400	3.400	36.00	0.00	0.00	36.000	0.000	36.0	36.0	25.7	2.50	948
C	004 T	Square	work floor	0.000	9.400	3.000	36.00	0.00	0.00	36.000	0.000	36.0	36.0	22.7	2.00	833
C	004B	Square	work floor T36'	0.000	9.400	9.200	16.50	0.00	0.00	16.500	0.000	16.5	16.5	69.5	5.20	1,207
C	006	Square	work floor	0.000	9.400	5.800	36.00	0.00	0.00	36.000	0.000	36.0	36.0	43.8	3.50	1,632
C	007	Square	work floor	0.000	9.700	5.800	32.50	0.00	0.00	32.500	0.000	32.5	32.5	45.2	4.00	1,528
C	008	Square	top of cribbing	0.000	9.700	9.200	22.00	0.00	0.00	22.000	0.000	22.0	22.0	71.7	5.20	1,659
C	009	Square	top of cribbing	0.000	9.700	6.400	36.00	0.00	0.00	36.000	0.000	36.0	36.0	49.9	4.20	1,871
C	010 T	Square	top of cribbing	0.000	9.400	3.000	36.00	0.00	0.00	36.000	0.000	36.0	36.0	22.7	2.00	833
C	010B	Square	top of cribbing	0.000	9.400	9.200	16.50	0.00	0.00	16.500	0.000	16.5	16.5	69.5	5.20	1,207
C	011	Square	top of cribbing	0.000	9.400	5.800	36.00	0.00	0.00	36.000	0.000	36.0	36.0	43.8	3.50	1,632
C	012	Square	top of cribbing	0.000	9.400	6.400	35.00	0.00	0.00	35.000	0.000	35.0	35.0	48.4	4.20	1,765
C	013	Square	work floor	0.000	9.400	6.400	35.00	0.00	0.00	35.000	0.000	35.0	35.0	48.4	4.20	1,765
C	014	Square	work floor	0.000	9.400	5.800	36.00	0.00	0.00	36.000	0.000	36.0	36.0	43.8	3.50	1,632
C	015 T	Square	top of cribbing	0.000	9.400	3.000	36.00	0.00	0.00	36.000	0.000	36.0	36.0	22.7	2.00	833

Exam Date: 11/03/2008
 Examiner: 1

Wilton Farmers Union Elevator Co.
 Box 188
 Wilton, ND
 County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Wilton

Section: C

C		015B	Square	top of cribbing	0.000	9.400	9.200	16.50	0.00	0.00	16.500	0.000	16.5	69.5	5.20	1,207
C		016	Square	work floor	0.000	9.700	5.800	36.00	0.00	0.00	36.000	0.000	36.0	45.2	4.00	1,692
C		017 T	Square	top of cribbing	0.000	9.700	3.000	36.00	0.00	0.00	36.000	0.000	36.0	23.4	2.00	859
C		017B	Square	top of cribbing	0.000	9.700	9.200	16.50	0.00	0.00	16.500	0.000	16.5	71.7	5.20	1,245
C		020	Square	work floor	0.000	9.700	6.400	36.00	0.00	0.00	36.000	0.000	36.0	49.9	4.20	1,871
C		021	Square	work floor	0.000	4.500	3.400	36.00	0.00	0.00	36.000	0.000	36.0	12.3	2.00	452
C		023 A	Square	work floor	0.000	9.400	5.800	36.00	0.00	0.00	36.000	0.000	36.0	43.8	3.50	1,632
C		023 T	Square	top of cribbing	0.000	9.400	3.000	36.00	0.00	0.00	36.000	0.000	36.0	22.7	2.00	833
C		023B	Square	top of cribbing-top 36'	0.000	9.400	9.200	16.50	0.00	0.00	16.500	0.000	16.5	69.5	5.20	1,207
C		101	Square	catwalk	0.000	14.40	5.500	32.00	0.00	0.00	32.000	0.000	32.0	63.7	5.00	2,140
C		102	Square	catwalk	0.000	14.40	5.500	32.00	0.00	0.00	32.000	0.000	32.0	63.7	5.00	2,140
C		103 T	Square	catwalk	0.000	14.40	11.60	44.00	0.00	0.00	44.000	0.000	44.0	134.3	6.50	6,293
C		103B	Square	catwalk T44'	0.000	12.00	11.60	10.00	0.00	0.00	10.000	0.000	10.0	111.9	6.20	1,188
C		104 T	Square	catwalk	0.000	14.40	11.60	44.00	0.00	0.00	44.000	0.000	44.0	134.3	6.50	6,293
C		104B	Square	catwalk T44'	0.000	12.00	11.60	10.00	0.00	0.00	10.000	0.000	10.0	111.9	6.20	1,188
C		105 T	Square	catwalk	0.000	14.40	11.40	44.00	0.00	0.00	44.000	0.000	44.0	132.0	6.50	6,186
C		105B	Square	catwalk T44'	0.000	12.00	11.40	10.00	0.00	0.00	10.000	0.000	10.0	110.0	6.20	1,168
C		106 T	Square	catwalk	0.000	14.40	11.40	44.00	0.00	0.00	44.000	0.000	44.0	132.0	6.50	6,186
C		106B	Square	catwalk T44'	0.000	12.00	11.40	10.00	0.00	0.00	10.000	0.000	10.0	110.0	6.20	1,168
C		107 T	Square	catwalk	0.000	14.40	11.60	44.00	0.00	0.00	44.000	0.000	44.0	134.3	6.50	6,293
C		107B	Square	catwalk T44'	0.000	12.00	11.60	10.00	0.00	0.00	10.000	0.000	10.0	111.9	6.20	1,188

Exam Date: 11/03/2008
 Examiner: 1

Wilton Farmers Union Elevator Co.
 Box 188
 Wilton, ND
 County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg).	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Wilton

Section: C

	C	108 T	Square	catwalk	0.000	14.40	11.60	44.00	0.00	0.00	44.000	0.000	44.0	134.3	6.50	6,293
	C	108B	Square	catwalk T44'	0.000	12.00	11.60	10.00	0.00	0.00	10.000	0.000	10.0	111.9	6.20	1,188
	C	109 T	Square	catwalk	0.000	14.40	11.40	44.00	0.00	0.00	44.000	0.000	44.0	132.0	6.50	6,186
	C	109B	Square	catwalk T44'	0.000	12.00	11.40	10.00	0.00	0.00	10.000	0.000	10.0	110.0	6.20	1,168
Added	C	201	Peaked	top of sidewall	30.000	0.000	0.000	46.00	0.00	0.00	46.000	1.800	47.8	568.2	9.00	29,604
Added	C	202	Peaked	top of sidewall	30.000	0.000	0.000	46.00	0.00	0.00	46.000	1.800	47.8	568.2	9.00	29,604
Bin count: 41															Facility: Wilton Section: C Total:	145,817
															To Even:	146,000

Overall Licensed Bin Capacity for:
 Wilton Farmers Union Elevator Co.

Bin count: 248

Licensed Capacity: _____
 (includes pack)

Licensed Capacity (to even): _____
 (includes pack and section totals are rounded up to next highest 1000)

1,746,164 Bu.

1,749,000 Bu.

WILTON FARMERS UNION ELEVATOR CO
 WILTON ND
 REGAN LOCATION
 SECTION D

Section D

12		13	16		17
ML	10	11	19	18	21
					22
9		33	31	20	25
8		14	23	24	
6	5	02	30	27	26
3	4	01	32	29	28


office

Section D

102	104	106	108	110	112	114
101	103	105	107	109	111	113
1						
1						
1	117					
1	1					
1	1					
6	8					

WILTON FARMERS UNION ELEVATOR CO
 WILTON ND
 REGAN LOCATION
 SECTION D & E

SECTION D

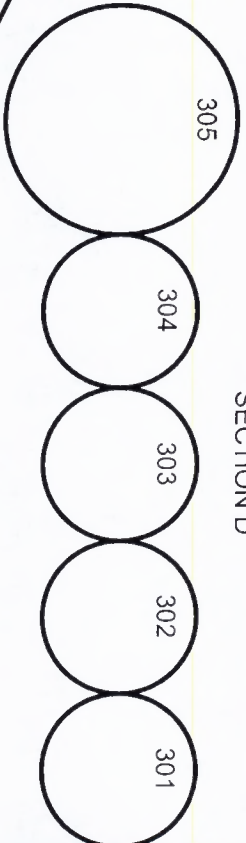

204	203	202
205	207	201
206	208	209


SECTION D



017	019	020	018
011	013	014	012
07	005	010	08
03	XXX	04	06
	XXX	01	




Section E



Section E

MAIN ELEV.
SECTION

WILTON FARMERS UNION ELEVATOR CO
 WILTON ND
 WASHBURN LOCATION
 SECTION G

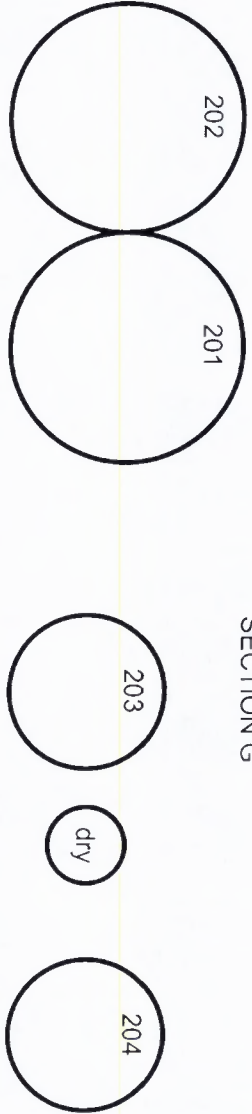


cp railroad spur

08	010	013	015	019	112	114	111	109
06	05	09	18	016	115	104	106	107
		014	2					
04	03	025	21	20	108	xx	102	105
	xx		24	23	TB	xx		
	xx							



SECTION G

SECTION G

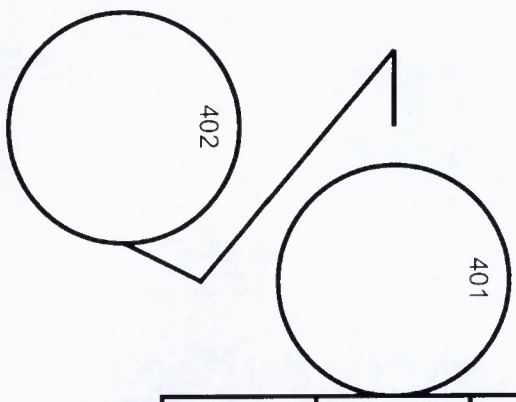

WILTON FARMERS UNION ELEVATOR CO
 WILTON ND
 SECTION A

DMV&W RAIL


040	038	036	034	032
039	037	035	033	031

SECTION A

025	027	015	014	013	011	09
24A	028	018	016	010	03	07
026	021	020	driveway	cb	04	06
		22				
			x	2		1
			x			8




SECTION A

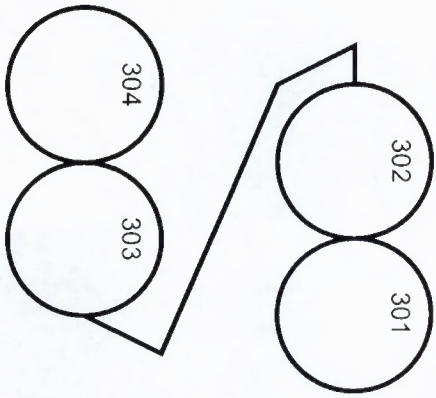

WILTON FARMERS UNION ELEVATOR CO
 WILTON ND
 SECTION C

cp rail

106	107	108	109		015	014	013	012	011	010
105	104	103	102	101	017	016	020	09	07	08
					023	023A	21	02	06	04
							x x			



SECTION C

driveway

SECTION C

whse.

roller mill

office