



# APPLICATION FOR REGISTRATION AS A REGISTERED SERVICE COMPANY

Public Service Commission  
SFN 51277 (4/2013)



TYPE OR PRINT - AN INCOMPLETE OR ILLEGIBLE APPLICATION WILL BE REJECTED

Name of Company <b>Oday Equipment</b>	Email Address <b>Owent@odayequipment.com</b>	Application Date <b>4/14/14</b>	
Mailing Address <b>635 31st. SE</b>	City <b>Minot,</b>	State <b>N.D.</b>	Zip Code <b>58701</b>
Telephone Number <b>701-852-3145</b>	Cell Phone Number <b>701-340-9854</b>	Fax Number <b>701-852-2058</b>	

Select below all device types your company will certify:

Scales (include maximum capacity, if applicable)	Liquid (include maximum flow rate, if applicable)
<input type="checkbox"/> 1. Rail <input type="checkbox"/> 2. Truck <input type="checkbox"/> 3. Livestock <input type="checkbox"/> 4. Hopper: Max. Capacity: _____ <input type="checkbox"/> 5. Belt <input type="checkbox"/> 6. Over 30 lbs.: Max. Capacity: _____ <input type="checkbox"/> 7. 30 lbs. or less <input type="checkbox"/> 8. Class II (indicate on your calibration report which weight kit is Class II certified) <input type="checkbox"/> 9. Other: Please List:	<input checked="" type="checkbox"/> 1. Retail Fuel (less than 20 gal. per minute) <input checked="" type="checkbox"/> 2. High Flow Retail Fuel (20 gal. per minute or greater) <input type="checkbox"/> 3. Vehicle Tank: Max. Flow Rate: _____ <input checked="" type="checkbox"/> 4. Stationary Bulk (fuel or oil): Max. Flow Rate: <b>100 gpm</b> <input checked="" type="checkbox"/> 5. LPG <input checked="" type="checkbox"/> 6. Stationary LPG <input type="checkbox"/> 7. Fertilizer: Max. Flow Rate: _____ <input type="checkbox"/> 8. Chemical <input type="checkbox"/> 9. Anhydrous <input type="checkbox"/> 10. Loading Rack <input type="checkbox"/> 11. Other: Please List:

List below all persons employed by your company as a North Dakota Registered Service Person and the device types they are registered to certify (attach a separate sheet to list additional employees):

Permit No.	Employee	Device Types Registered to Certify (list using device type numbers from above)
e.g. 1001	e.g. John Doe	e.g. Scales - 2, 3, 6, 8; e.g. Liquid - 1, 2, 6
1476	Jim Rodgers	1, 2, 4, 5, 6
1668	Ken Kwasigroh	1, 2, 4, 5, 6
1678	Kurt Nelserh	1, 2, 4, 5, 6
1634	Vernon Patterson	1, 2, 4, 5, 6
1668	John Boehm	1, 2, 4, 5, 6
1720	Brian Lewis	1, 2, 4, 5, 6
1542	Ron Cook	1, 2, 4, 5, 6

Continued on Page 2

List below all persons employed by your company as a North Dakota Registered Service Person and the device types they are registered to certify (attach a separate sheet to list additional employees):

Permit No.	Employee	Device Types Registered to Certify (list using device type numbers from above)
e.g. 1001	e.g. John Doe	e.g. Scales - 2, 3, 6, 8; e.g. Liquid - 1, 2, 6
1324	Owen Rust	1, 2, 4, 5, 6
1722	Phillip Waltz	1, 2, 4, 5, 6
1740	Zebulan Tume	1, 2, 4, 5, 6
1741	Ian Nelson	1, 2, 4, 5, 6

Continued on Page 2





List below all field standards (attach current calibration reports):  
Ser#

5gal Seraphin	07-45256-07	100 gal	Liq. 041320840-0102
5gal Seraphin	09-06136	100 gal	Liq. 051320997-0103
5gal Seraphin	11-88799	100 gal	WPG 44753
5gal Seraphin	09-06135		
5gal Seraphin	07-03144		
5gal Seraphin	09-06131		
5gal Seraphin			
5gal Seraphin	45401		


Include the following additional items with this application:

- A sample of your standardized test report as required by North Dakota Administrative Code Section 69-10-04-05.
- A sample of your "tested and approved" sticker as required by North Dakota Administrative Code Section 69-10-01-03.
- A photocopy of each side of your crimped lead wire seal.

**Public Company Listing:**

Include my company information on your registered service company list for public contact.  
 Yes     No

I am Owen Rust Service Mgr, and have authority to represent this company. By signing this application, I declare that I have examined this form and accompanying documentation, and to the best of my knowledge and belief, the facts stated and documentation provided is true, correct, and complete.

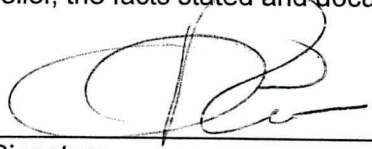  
Signature

**Send Completed Application and Related Documents To:**

Public Service Commission  
600 E Boulevard Ave Dept 408  
Bismarck ND 58505-0480  
Telephone: (701) 328-2400  
Fax: (701) 328-2410



Weights & Measures Metrology Laboratory  
 14305 Southcross Drive #150  
 Burnsville, MN 55306-7008  
 651.539.1555 FAX 651.539.1553



Receipt Date: April 1, 2014  
 Test Date: April 2, 2014  
 Report Date: April 2, 2014

State Test No.: 332349  
 Serial No.: 11-88799  
 Bar Code: 202244

## Calibration Report

O'DAY EQUIPMENT LLC  
 635 31ST ST SE  
 MINOT, ND 58701  
 Contact: OWEN RUST  
 Phone: 701-356-8453  
 PO Number: NONE  
 SOP: 32  
 Technician ID: 11

Item(s) Submitted: 5 Gallon Measure  
 Manufacturer: Seraphin  
 Material: ss  
 Equipment Number: None  
 Condition: Good  
 Temperature: 19.°C  
 Pressure: 741.1 mmHg  
 Relative Humidity: 31. %

Nominal Volume		Error (in <sup>3</sup> )	Volume Contained At Zero Line (gallons)	Uncertainty (in <sup>3</sup> )	Coefficient of Expansion(/°F)
5 gal	As Found	-0.24	4.9990	0.62	0.0000265
	As Left	-0.04	4.9998	0.62	

Neck Calibration: No neck calibration was done at this time.

This measure or prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds, a drain time of 10 seconds after cessation of flow and at a reference temperature of 60°F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95%.

Results apply to item identified in this report only.

Pete Whebbe

*Pete J. Whebbe*  
 Metrologist

Reviewed by:

Heidi Jones

*Heidi Jones*  
 Approved Signatory





Weights & Measures Metrology Laboratory  
 14305 Southcross Drive #150  
 Burnsville, MN 55306-7008  
 651.539.1555 FAX 651.539.1553



Receipt Date: April 1, 2014  
 Test Date: April 2, 2014  
 Report Date: April 2, 2014

State Test No.: 332350  
 Serial No.: 07-03144  
 Bar Code: 202246

## Calibration Report

O'DAY EQUIPMENT LLC  
 635 31ST ST SE  
 MINOT, ND 58701  
 Contact: OWEN RUST  
 Phone: 701-356-8453  
 PO Number: NONE  
 SOP: 32  
 Technician ID: 11

Item(s) Submitted: 5 Gallon Measure  
 Manufacturer: Seraphin  
 Material: ss  
 Equipment Number: None  
 Condition: Good  
 Temperature: 19.°C  
 Pressure: 741.1 mmHg  
 Relative Humidity: 31. %

Nominal Volume		Error (in <sup>3</sup> )	Volume Contained At Zero Line (gallons)	Uncertainty (in <sup>3</sup> )	Coefficient of Expansion(1/°F)
5 gal	As Found	-0.24	4.9990	0.62	0.0000265
	As Left	-0.04	4.9998	0.62	

Neck Calibration: No neck calibration was done at this time.

This measure or prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds, a drain time of 10 seconds after cessation of flow and at a reference temperature of 60°F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95%.

Results apply to item identified in this report only.

Pete Whebbe

Metrologist

Reviewed by:

Heidi Jones

Approved Signatory





Weights & Measures Metrology Laboratory  
 14305 Southcross Drive #150  
 Burnsville, MN 55306-7008  
 651.539.1555 FAX 651.539.1553



Receipt Date: April 1, 2014  
 Test Date: April 2, 2014  
 Report Date: April 2, 2014

State Test No.: 332351  
 Serial No.: 09-06136  
 Bar Code: 202243

## Calibration Report

O'DAY EQUIPMENT LLC  
 635 31ST ST SE  
 MINOT, ND 58701  
 Contact: OWEN RUST  
 Phone: 701-356-8453  
 PO Number: NONE  
 SOP: 32  
 Technician ID: 11

Item(s) Submitted: 5 Gallon Measure  
 Manufacturer: Seraphin  
 Material: ss  
 Equipment Number: None  
 Condition: Good  
 Temperature: 19.°C  
 Pressure: 741.1 mmHg  
 Relative Humidity: 31. %

Nominal Volume		Error (in <sup>3</sup> )	Volume Contained At Zero Line (gallons)	Uncertainty (in <sup>3</sup> )	Coefficient of Expansion(1/°F)
5 gal	As Found	-0.03	4.9999	0.62	0.0000265
	As Left	-0.03	4.9999	0.62	

Neck Calibration: No neck calibration was done at this time.

This measure or prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds, a drain time of 10 seconds after cessation of flow and at a reference temperature of 60°F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95%.

Results apply to item identified in this report only.

Pete Whebbe

Metrologist

Reviewed by:

Heidi Jones

Approved Signatory





Weights & Measures Metrology Laboratory  
 14305 Southcross Drive #150  
 Burnsville, MN 55306-7008  
 651.539.1555 FAX 651.539.1553

Receipt Date: April 1, 2014  
 Test Date: April 2, 2014  
 Report Date: April 2, 2014

State Test No.: 332352  
 Serial No.: 09-06131  
 Bar Code: 202247

## Calibration Report

O'DAY EQUIPMENT LLC  
 635 31ST ST SE  
 MINOT, ND 58701  
 Contact: OWEN RUST  
 Phone: 701-356-8453  
 PO Number: NONE  
 SOP: 32  
 Technician ID: 11

Item(s) Submitted: 5 Gallon Measure  
 Manufacturer: Seraphin  
 Material: ss  
 Equipment Number: None  
 Condition: Good  
 Temperature: 19.°C  
 Pressure: 741.1 mmHg  
 Relative Humidity: 31. %

Nominal Volume		Error (in <sup>3</sup> )	Volume Contained	Uncertainty (in <sup>3</sup> )	Coefficient of Expansion(/°F)
			At Zero Line (gallons)		
5 gal	As Found	-0.03	4.9999	0.62	0.0000265
	As Left	-0.03	4.9999	0.62	

Neck Calibration: No neck calibration was done at this time.

This measure or prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds, a drain time of 10 seconds after cessation of flow and at a reference temperature of 60°F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95%.

Results apply to item identified in this report only.

Pete Whebbe

Metrologist

Reviewed by:

Heidi Jones

Approved Signatory



Weights & Measures Metrology Laboratory  
 14305 Southcross Drive #150  
 Burnsville, MN 55306-7008  
 651.539.1555 FAX 651.539.1553

Receipt Date: April 1, 2014  
 Test Date: April 2, 2014  
 Report Date: April 2, 2014

State Test No.: 332353  
 Serial No.: 45401  
 Bar Code: 202249

## Calibration Report

O'DAY EQUIPMENT LLC  
 635 31ST ST SE  
 MINOT, ND 58701  
 Contact: OWEN RUST  
 Phone: 701-356-8453  
 PO Number: NONE  
 SOP: 32  
 Technician ID: 11

Item(s) Submitted: 5 Gallon Measure  
 Manufacturer: Seraphin  
 Material: ms  
 Equipment Number: None  
 Condition: Good  
 Temperature: 19.°C  
 Pressure: 741.1 mmHg  
 Relative Humidity: 31. %

Nominal Volume		Error (in <sup>3</sup> )	Volume Contained At Zero Line (gallons)	Uncertainty (in <sup>3</sup> )	Coefficient of Expansion(/°F)
5 gal	As Found	-0.32	4.9986	0.62	0.0000186
	As Left	-0.01	5.0000	0.62	

Neck Calibration: No neck calibration was done at this time.


This measure or prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds, a drain time of 10 seconds after cessation of flow and at a reference temperature of 60°F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95%.

Results apply to item identified in this report only.

Pete Wiebbe



Metrologist

Reviewed by:

Heidi Jones



Approved Signatory





Weights & Measures Metrology Laboratory  
 14305 Southcross Drive #150  
 Burnsville, MN 55306-7008  
 651.539.1555 FAX 651.539.1553

Receipt Date: April 1, 2014  
 Test Date: April 2, 2014  
 Report Date: April 2, 2014

State Test No.: 332354  
 Serial No.: 09-06135  
 Bar Code: 202245

## Calibration Report

O'DAY EQUIPMENT LLC  
 635 31ST ST SE  
 MINOT, ND 58701  
 Contact: OWEN RUST  
 Phone: 701-356-8453  
 PO Number: NONE  
 SOP: 32  
 Technician ID: 11

Item(s) Submitted: 5 Gallon Measure  
 Manufacturer: Seraphin  
 Material: ss  
 Equipment Number: None  
 Condition: Good  
 Temperature: 19.°C  
 Pressure: 741.1 mmHg  
 Relative Humidity: 31. %

Nominal Volume		Error (in <sup>3</sup> )	Volume Contained		Coefficient of Expansion(°F)
			At Zero Line (gallons)	Uncertainty (in <sup>3</sup> )	
5 gal	As Found	-0.02	4.9999	0.62	0.0000265
	As Left	-0.02	4.9999	0.62	

Neck Calibration: No neck calibration was done at this time.

This measure or prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds, a drain time of 10 seconds after cessation of flow and at a reference temperature of 60°F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95%.

Results apply to item identified in this report only.

Pete Whebbe

Metrologist

Reviewed by:

Heidi Jones

Approved Signatory





Weights & Measures Metrology Laboratory  
 14305 Southcross Drive #150  
 Burnsville, MN 55306-7008  
 651.539.1555 FAX 651.539.1553

Receipt Date: April 1, 2014  
 Test Date: April 2, 2014  
 Report Date: April 2, 2014

State Test No.: 332355  
 Serial No.: SN1  
 Bar Code: 202467

## Calibration Report

O'DAY EQUIPMENT LLC  
 635 31ST ST SE  
 MINOT, ND 58701  
 Contact: OWEN RUST  
 Phone: 701-356-8453  
 PO Number: NONE  
 SOP: 32  
 Technician ID: 11

Item(s) Submitted: 5 Gallon Measure  
 Manufacturer: Seraphin  
 Material: ms  
 Equipment Number: None  
 Condition: Good  
 Temperature: 19.°C  
 Pressure: 741.1 mmHg  
 Relative Humidity: 31. %

Nominal Volume		Error (in <sup>3</sup> )	Volume Contained At Zero Line (gallons)	Uncertainty (in <sup>3</sup> )	Coefficient of Expansion(1/°F)
5 gal	As Found	-0.02	4.9999	0.62	0.0000186
	As Left	-0.02	4.9999	0.62	

Neck Calibration: No neck calibration was done at this time.

This measure or prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds, a drain time of 10 seconds after cessation of flow and at a reference temperature of 60°F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95%.

Results apply to item identified in this report only.

Pete Wiebbe

*Pete Wiebbe*  
 Metrologist

Reviewed by:

Heidi Jones

*Heidi Jones*  
 Approved Signatory



Weights & Measures Metrology Laboratory  
 14305 Southcross Drive #150  
 Burnsville, MN 55306-7008  
 651.215.5821 FAX 952.435.4040 TTY 952.435.4045

Receipt Date: June 24, 2013  
 Test Date: June 25, 2013  
 Report Date: June 25, 2013

State Test No.: 331167  
 Serial No.: 041320840-0102

## Calibration Report

WESTMOR FLUID SOLUTIONS LLC  
 7220 CENTRAL AVE NE  
 MINNEAPOLIS, MN 55432  
 Contact: Ryan Hartin  
 Phone: 763-502-9613  
 PO Number: 43391  
 SOP: 33  
 Technician ID: 08

Item(s) Submitted: 100 Gallon Prover  
 Manufacturer: Westmor Fluid Solutions  
 Material: ss  
 Description: Dry Bottom  
 Condition: New  
 Temperature: 26.°C  
 Pressure: 732.1 mmHg  
 Relative Humidity: 51. %

Nominal Volume		Volume (gallons)	Error (in <sup>3</sup> )	Uncertainty (in <sup>3</sup> )	Coefficient of Expansion(/°F)
100 gal	As Found	99.916	-19.4	3.0	0.0000288
	As Left	100.001	0.3	3.0	

Neck calibration tested and found correct.

This prover has been calibrated as a "to contain after wet down" vessel with a drain time of 30 seconds after cessation of flow and at a reference temperature of 60°F.

The prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable through the MN Weights & Measures Division mass standards to National Institute of Standards & Technology (NIST) mass standards. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95%.

Results apply to item identified in this report only.

Nils Fleming

*Nils Fleming*  
 Metrologist

Reviewed by:  
 Bruce Adams

*Bruce A. Adams*  
 Approved Signatory





2nd one



Weights & Measures Metrology Laboratory  
14305 Southcross Drive #150  
Burnsville, MN 55306-7008  
651.215.5821 FAX 952.435.4040 TTY 952.435.4045

Receipt Date: June 26, 2013  
Test Date: August 1, 2013  
Report Date: August 1, 2013

State Test No.: 331181  
Serial No.: 051320997-0103

## Calibration Report

WESTMOR FLUID SOLUTIONS LLC  
7220 CENTRAL AVE NE  
MINNEAPOLIS, MN 55432  
Contact: Ryan Hartin  
Phone: 763-502-9613  
PO Number: 43391  
SOP: 33  
Technician ID: 08

Item(s) Submitted: 100 Gallon Prover  
Manufacturer: Determan Brownie Inc.  
Material: ss  
Description: Dry Bottom  
Condition: New  
Temperature: 23.3°C  
Pressure: 738.1 mmHg  
Relative Humidity: 50. %

Nominal Volume		Volume (gallons)	Error (in <sup>3</sup> )	Uncertainty (in <sup>3</sup> )	Coefficient of Expansion(°F)
100 gal	As Found	99.957	-9.9	3.0	0.0000288
	As Left	100.001	0.3	3.0	

Neck Calibration: Neck calibration completed and meets HB 105-3 specifications.

This prover has been calibrated as a "to contain after wet down" vessel with a drain time of 30 seconds after cessation of flow and at a reference temperature of 60°F.

The prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable through the MN Weights & Measures Division mass standards to National Institute of Standards & Technology (NIST) mass standards. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95%.

Results apply to item identified in this report only.

Nils Fleming

Metrologist

Reviewed by:

Bruce Adams

Approved Signatory





Weights & Measures Metrology Laboratory  
 14305 Southcross Drive #150  
 Burnsville, MN 55306-7008

651.215.5821 FAX 952.435.4040 TTY 952.435.4045

Receipt Date: August 6, 2013  
 Test Date: August 20, 2013  
 Report Date: August 20, 2013

State Test No.: 331342  
 Serial No.: 44753


## Pressure Correction Chart

ARROW TANK & ENGINEERING  
 650 EMERSON ST N  
 CAMBRIDGE, MN 55008-1317  
 Contact: Kelley Schlickemayer  
 Phone: 763-552-8216  
 PO Number: 000-023-4689  
 SOP: 34  
 Technician ID: 08

Item(s) Submitted: 100 gallon LPG Prover  
 Manufacturer: Arrow Tank  
 Material: ms  
 Description: Wet Bottom  
 Condition: New  
 Temperature: 27.°C  
 Pressure: 735.3 mmHg  
 Relative Humidity: 43. %

Pressure Gauge Reading (PSIG)	Volume Correction (gal)
0	-0.088
10	-0.030
20	-0.068
30	-0.058
40	-0.048
50	-0.038
60	-0.030
70	-0.023
80	-0.015
90	-0.008
100	0.000
110	0.013
120	0.025
130	0.038
140	0.050
150	0.063
160	0.073
170	0.083
180	0.093
190	0.103
200	0.113

Nils Fleming

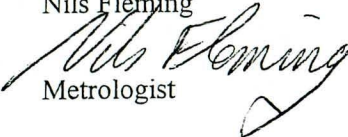

Metrologist

