



APPLICATION FOR REGISTRATION AS A REGISTERED SERVICE COMPANY

Public Service Commission
SFN 51277 (2/2014)



TYPE OR PRINT - AN INCOMPLETE OR ILLEGIBLE APPLICATION WILL BE REJECTED

Name of Company <i>O'Day Equipment</i>	Email Address <i>Owens @ odayequipment.com</i>	Application Date <i>12/19/14</i>	
Mailing Address <i>235 31st SE</i>	City <i>Minot</i>	State <i>N.D.</i>	Zip Code <i>58701</i>
Telephone Number <i>701-852-3145</i>	Cell Phone Number <i>701-340-9854</i>	Fax Number <i>701-852-6058</i>	

Select below all device types your company will certify:

Scales (include maximum capacity, if applicable)	Liquid (include maximum flow rate, if applicable)
<input type="checkbox"/> 1. Rail <input type="checkbox"/> 2. Truck <input type="checkbox"/> 3. Livestock <input type="checkbox"/> 4. Hopper: Max. Capacity: _____ <input type="checkbox"/> 5. Belt <input type="checkbox"/> 6. Over 30 lbs.: Max. Capacity: _____ <input type="checkbox"/> 7. 30 lbs. or less <input type="checkbox"/> 8. Class II (indicate on your calibration report which weight kit is Class II certified) <input type="checkbox"/> 9. Other: Please List:	<input checked="" type="checkbox"/> 1. Retail Fuel (less than 20 gal. per minute) <input checked="" type="checkbox"/> 2. High Flow Retail Fuel (20 gal. per minute or greater) <input checked="" type="checkbox"/> 3. Vehicle Tank: Max. Flow Rate: <i>200 gpm</i> <input checked="" type="checkbox"/> 4. Stationary Bulk (fuel or oil): Max. Flow Rate: <i>100 gpm</i> <input checked="" type="checkbox"/> 5. LPG <input checked="" type="checkbox"/> 6. Stationary LPG <input type="checkbox"/> 7. Fertilizer: Max. Flow Rate: _____ <input type="checkbox"/> 8. Chemical <input type="checkbox"/> 9. Anhydrous <input type="checkbox"/> 10. Loading Rack <input type="checkbox"/> 11. Other: Please List:

List below all persons employed by your company as a North Dakota Registered Service Person and the device types they are registered to certify (attach a separate sheet to list additional employees):

Permit No.	Employee	Device Types Registered to Certify (list using device type numbers from above)
<i>1476</i>	<i>Jim Rogers</i>	<i>1, 2, 4, 5, 6</i>
<i>11628</i>	<i>Ken Kwasigroch</i>	<i>1, 2, 4, 5, 6</i>
<i>11678</i>	<i>Kurt Helseth</i>	<i>1, 2, 4, 5, 6</i>
<i>11634</i>	<i>Vernon Patterson</i>	<i>1, 2, 4, 5, 6</i>
<i>11628</i>	<i>John Boehm</i>	<i>1, 2, 4, 5, 6</i>
<i>1542</i>	<i>Ron Cook</i>	<i>1, 2, 4, 5, 6</i>
<i>1722</i>	<i>Phillip Waltz</i>	<i>1, 2, 4, 5, 6</i>
<i>1324</i>	<i>Owen Rust</i>	<i>1, 2, 4, 5, 6</i>

*Ian Nelson } per Owen
Zeb Tunc } 803*

WM-14-787 Filed: 12/16/2014 Pages: 16
Application for permit

Application for Registration as a Registered Service Company
Page 2

List below all field standards (attach current calibration reports):

100 gal prover ^{SN#} 041320840-0162	5 gal Seraphim SN1
100 gal prover ^{SN#} 051320997-0103	
100 gal LPG Prover ^{SER#} 44753	
5 gal Seraphim ^{SN} 09-06135	
5 gal Seraphim ^{SN} 07-45256-07	
5 gal Seraphim ^{SN} 45401	
5 gal Seraphim ^{SN} 09-06131	
5 gal Seraphim ^{SN} 11-88799	
5 gal Seraphim ^{SN} 02-03144	

Additional Application Items (initial where appropriate):

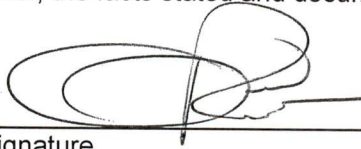
Standardized Test Report	<input type="checkbox"/> Copy enclosed
	<input checked="" type="checkbox"/> No change in report filed previously
Tested and Approved Sticker	<input type="checkbox"/> Copy enclosed
	<input checked="" type="checkbox"/> No change in sticker filed previously
Photocopy of Crimped Lead Wire Seal	<input type="checkbox"/> Copy enclosed
	<input checked="" type="checkbox"/> No change in crimped lead wire seal filed previously

Public Company Listing:

Include my company information on your registered service company list for public contact.

Yes No

I am Owen Rust Servicemgr, and have authority to represent this company.
By signing this application, I declare that I have examined this form and accompanying documentation, and to the best of my knowledge and belief, the facts stated and documentation provided is true, correct, and complete.



Signature

Send Completed Application and Related Documents To:

Public Service Commission
600 E Boulevard Ave Dept 408
Bismarck ND 58505-0480
Telephone: (701) 328-2400
Fax: (701) 328-2410



Receipt Date: March 13, 2015
Test Date: March 19, 2015
Report Date: March 24, 2015

State Test No.: 333963
Serial No.: 07-45256-07
Barcode: 202242

Calibration Report

O'DAY EQUIPMENT LLC
635 31ST ST SE
MINOT, ND 58701
Contact: KIM GREEK
Phone: 701-240-2042
PO Number: NONE
SOP: 32
Technician ID: 11

Item(s) Submitted: 5 Gallon Prover
Manufacturer: Seraphin
Material: Stainless Steel
Equipment Number: None
Condition: Good
Temperature: 19.6 °C
Pressure: 739.3 mmHg
Relative Humidity: 30. %

Nominal Volume		Error (in ³)	Volume Contained At Zero Line (gallons)	Uncertainty (in ³)	Coefficient of Expansion (1/°F)
5 gal	As Found	-0.12	4.9995	0.62	0.0000265
	As Left	-0.12	4.9995	0.62	

Neck Calibration: No neck calibration was done at this time.

This measure or prover has been calibrated as a "to contain after wet down" vessel with a drain time of 30 seconds and at a reference temperature of 60 °F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.

Results apply to item identified in this report only.

Pete Whobbe

Peter J. Whobbe
Metrologist

Reviewed by:
Mark Nicollet

Mark Nicollet
Quality Manager



Receipt Date: March 13, 2015
Test Date: March 19, 2015
Report Date: March 24, 2015

State Test No.: 333964
Serial No.: 09-06136
Barcode: 202243

Calibration Report

O'DAY EQUIPMENT LLC
635 31ST ST SE
MINOT, ND 58701
Contact: KIM GREEK
Phone: 701-240-2042
PO Number: NONE
SOP: 32
Technician ID: 11

Item(s) Submitted: 5 Gallon Measure
Manufacturer: Seraphin
Material: Stainless Steel
Equipment Number: None
Condition: Good
Temperature: 19.6 °C
Pressure: 739.3 mmHg
Relative Humidity: 30. %

Nominal Volume		Error (in ³)	Volume Contained At Zero Line (gallons)	Uncertainty (in ³)	Coefficient of Expansion (1/°F)
5 gal	As Found	-0.42	4.9982	0.62	0.0000265
	As Left	-0.01	4.9999	0.62	

Neck Calibration: No neck calibration was done at this time.

This measure or prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds, a drain time of 10 seconds after cessation of full flow and at a reference temperature of 60 °F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.

Results apply to item identified in this report only.

Pete Whebbe

Metrologist

Reviewed by:

Mark Nicollet

Quality Manager



Receipt Date: March 13, 2015
Test Date: March 19, 2015
Report Date: March 24, 2015

State Test No.: 333965
Serial No.: 11-88799
Barcode: 202244

Calibration Report

O'DAY EQUIPMENT LLC
635 31ST ST SE
MINOT, ND 58701
Contact: KIM GREEK
Phone: 701-240-2042
PO Number: NONE
SOP: 32
Technician ID: 11

Item(s) Submitted: 5 Gallon Measure
Manufacturer: Seraphin
Material: Stainless Steel
Equipment Number: None
Condition: Good
Temperature: 19.6 °C
Pressure: 739.3 mmHg
Relative Humidity: 30. %

Nominal Volume	Error (in ³)	Volume Contained		Coefficient of Expansion (°F)
		At Zero Line (gallons)	Uncertainty (in ³)	
5 gal	As Found	-0.46	4.9980	0.0000265
	As Left	0.00	5.0000	

Neck Calibration: No neck calibration was done at this time.

This measure or prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds, a drain time of 10 seconds after cessation of full flow and at a reference temperature of 60 °F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.

Results apply to item identified in this report only.

Pete Whebbe

Metrologist

Reviewed by:

Mark Nicollet

Quality Manager



Receipt Date: March 13, 2015
Test Date: March 19, 2015
Report Date: March 24, 2015

State Test No.: 333966
Serial No.: 09-06135
Barcode: 202245

Calibration Report

O'DAY EQUIPMENT LLC
635 31ST ST SE
MINOT, ND 58701
Contact: KIM GREEK
Phone: 701-240-2042
PO Number: NONE
SOP: 32
Technician ID: 11

Item(s) Submitted: 5 Gallon Measure
Manufacturer: Seraphin
Material: Stainless Steel
Equipment Number: None
Condition: Good
Temperature: 19.6 °C
Pressure: 739.3 mmHg
Relative Humidity: 30. %

Nominal Volume		Error (in ³)	Volume Contained At Zero Line (gallons)	Uncertainty (in ³)	Coefficient of Expansion (°F)
5 gal	As Found	-0.35	4.9985	0.62	0.0000265
	As Left	-0.01	5.0000	0.62	

Neck Calibration: No neck calibration was done at this time.

This measure or prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds, a drain time of 10 seconds after cessation of full flow and at a reference temperature of 60 °F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.

Results apply to item identified in this report only.

Pete Whebbe

Metrologist

Reviewed by:

Mark Nicollet

Quality Manager



Receipt Date: March 13, 2015
Test Date: March 19, 2015
Report Date: March 24, 2015

State Test No.: 333967
Serial No.: 07-03144
Barcode: 202246

Calibration Report

O'DAY EQUIPMENT LLC
635 31ST ST SE
MINOT, ND 58701
Contact: KIM GREEK
Phone: 701-240-2042
PO Number: NONE
SOP: 32
Technician ID: 11

Item(s) Submitted: 5 Gallon Measure
Manufacturer: Seraphin
Material: Stainless Steel
Equipment Number: None
Condition: Good
Temperature: 19.6 °C
Pressure: 739.3 mmHg
Relative Humidity: 30. %

Nominal Volume		Error (in ³)	Volume Contained At Zero Line (gallons)	Uncertainty (in ³)	Coefficient of Expansion (1/°F)
5 gal	As Found	0.11	5.0005	0.62	0.0000265
	As Left	0.11	5.0005	0.62	

Neck Calibration: No neck calibration was done at this time.

This measure or prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds, a drain time of 10 seconds after cessation of full flow and at a reference temperature of 60 °F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.

Results apply to item identified in this report only.

Pete Whebbe

Metrologist

Reviewed by:

Mark Nicollet

Quality Manager



Receipt Date: March 13, 2015
Test Date: March 19, 2015
Report Date: March 24, 2015

State Test No.: 333968
Serial No.: 09-06131
Barcode: 202247

Calibration Report

O'DAY EQUIPMENT LLC
635 31ST ST SE
MINOT, ND 58701
Contact: KIM GREEK
Phone: 701-240-2042
PO Number: NONE
SOP: 32
Technician ID: 11

Item(s) Submitted: 5 Gallon Measure
Manufacturer: Seraphin
Material: Stainless Steel
Equipment Number: None
Condition: Good
Temperature: 19.6 °C
Pressure: 739.3 mmHg
Relative Humidity: 30. %

Nominal Volume		Error (in ³)	Volume Contained At Zero Line (gallons)	Uncertainty (in ³)	Coefficient of Expansion (1/°F)
5 gal	As Found	0.03	5.0001	0.62	0.0000265
	As Left	0.03	5.0001	0.62	

Neck Calibration: No neck calibration was done at this time.


This measure or prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds, a drain time of 10 seconds after cessation of full flow and at a reference temperature of 60 °F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.


Results apply to item identified in this report only.

Pete Whebbe


Metrologist

Reviewed by:

Mark Nicollet


Quality Manager



Receipt Date: March 13, 2015
Test Date: March 19, 2015
Report Date: March 24, 2015

State Test No.: 333969
Serial No.: 40549
Barcode: 202248

Calibration Report

O'DAY EQUIPMENT LLC
635 31ST ST SE
MINOT, ND 58701
Contact: KIM GREEK
Phone: 701-240-2042
PO Number: NONE
SOP: 32
Technician ID: 11

Item(s) Submitted: 5 Gallon Measure
Manufacturer: Seraphin
Material: Mild Steel
Equipment Number: None
Condition: Good
Temperature: 19.6 °C
Pressure: 739.3 mmHg
Relative Humidity: 30. %

Nominal Volume	Error (in ³)	Volume Contained		Uncertainty (in ³)	Coefficient of Expansion (°F)
		At Zero Line	(gallons)		
5 gal	As Found	-0.67	4.9971	0.62	0.0000186
	As Left	0.00	5.0000	0.62	

Neck Calibration: No neck calibration was done at this time.

This measure or prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds, a drain time of 10 seconds after cessation of full flow and at a reference temperature of 60 °F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.

Results apply to item identified in this report only.

Pete Whebbe

Metrologist

Reviewed by:

Mark Nicollet

Quality Manager



Receipt Date: March 13, 2015
Test Date: March 19, 2015
Report Date: March 24, 2015

State Test No.: 333970
Serial No.: 45401
Barcode: 202249

Calibration Report

O'DAY EQUIPMENT LLC
635 31ST ST SE
MINOT, ND 58701
Contact: KIM GREEK
Phone: 701-240-2042
PO Number: NONE
SOP: 32
Technician ID: 11

Item(s) Submitted: 5 Gallon Measure
Manufacturer: Seraphin
Material: Mild Steel
Equipment Number: None
Condition: Good
Temperature: 19.6 °C
Pressure: 739.3 mmHg
Relative Humidity: 30. %

Nominal Volume		Error (in ³)	Volume Contained At Zero Line (gallons)	Uncertainty (in ³)	Coefficient of Expansion (1/°F)
5 gal	As Found	0.87	5.0038	0.62	0.0000186
	As Left	0.02	5.0001	0.62	

Neck Calibration: No neck calibration was done at this time.


This measure or prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds, a drain time of 10 seconds after cessation of full flow and at a reference temperature of 60 °F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.


Results apply to item identified in this report only.

Pete Whebbe


Metrologist

Reviewed by:

Mark Nicollet


Quality Manager



Receipt Date: March 13, 2015
Test Date: March 19, 2015
Report Date: March 24, 2015

State Test No.: 333971
Serial No.: S/N 1
Barcode: 202467

Calibration Report

O'DAY EQUIPMENT LLC
635 31ST ST SE
MINOT, ND 58701
Contact: KIM GREEK
Phone: 701-240-2042
PO Number: NONE
SOP: 32
Technician ID: 07

Item(s) Submitted: 5 Gallon Measure
Manufacturer: SERAPHIN
Material: Mild Steel
Equipment Number: None
Condition: Fair
Temperature: 19.6 °C
Pressure: 739.3 mmHg
Relative Humidity: 30. %

Nominal Volume		Error (in ³)	Volume Contained At Zero Line (gallons)	Uncertainty (in ³)	Coefficient of Expansion (1/°F)
5 gal	As Found	-0.08	4.9996	0.62	0.0000186
	As Left	-0.08	4.9996	0.62	


Neck Calibration: No neck calibration was done at this time.


This measure or prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds, a drain time of 10 seconds after cessation of full flow and at a reference temperature of 60 °F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.

Results apply to item identified in this report only.

Mark Nicollet

Quality Manager

Reviewed by:
Pete Whebbe

Metrologist



Receipt Date: March 13, 2015
Test Date: March 19, 2015
Report Date: March 24, 2015

State Test No.: 333972
Serial No.: 42653
Barcode: 202729

Calibration Report

O'DAY EQUIPMENT LLC
635 31ST ST SE
MINOT, ND 58701
Contact: KIM GREEK
Phone: 701-240-2042
PO Number: NONE
SOP: 32
Technician ID: 07

Item(s) Submitted: 5 Gallon Measure
Manufacturer: SERAPHIN
Material: Mild Steel
Equipment Number: None
Condition: Fair/Dirty
Temperature: 19.6 °C
Pressure: 739.3 mmHg
Relative Humidity: 30. %

Nominal Volume		Error (in ³)	Volume Contained At Zero Line (gallons)	Uncertainty (in ³)	Coefficient of Expansion (1/°F)
5 gal	As Found	-0.18	4.9992	0.62	0.0000186
	As Left	-0.18	4.9992	0.62	

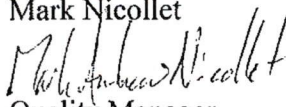
Neck Calibration: No neck calibration was done at this time.


This measure or prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds, a drain time of 10 seconds after cessation of full flow and at a reference temperature of 60 °F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.

Results apply to item identified in this report only.

Mark Nicollet

Quality Manager

Reviewed by:
Pete Whebbe

Metrologist



Receipt Date: March 13, 2015
Test Date: March 19, 2015
Report Date: March 19, 2015

State Test No.: 333960
Serial No.: 041320840-0102
Barcode: 202317

Calibration Report

O'DAY EQUIPMENT LLC
635 31ST ST SE
MINOT, ND 58701

Contact: KIM GREEK
Phone: 701-240-2042
PO Number: NONE
SOP: 33
Technician ID: 07

Item(s) Submitted: 100 Gallon Prover
Manufacturer: Westmor Fluid Solutions
Material: Stainless Steel (304)
Description: Dry Bottom
Condition: Good
Temperature: 19.1°C
Pressure: 740.6 mmHg
Relative Humidity: 32. %

Nominal Volume		Volume (gallons)	Error (in ³)	Uncertainty (in ³)	Coefficient of Expansion(°F)
100 gal	As Found	100.021	4.9	3.0	0.0000288
	As Left	100.004	0.8	3.0	

Neck Calibration: No neck calibration was done at this time.

This prover has been calibrated as a "to contain after wet down" vessel with a drain time of 30 seconds after cessation of full flow and at a reference temperature of 60 °F.

The prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.


Results apply to item identified in this report only.

Mark Nicollet


Quality Manager

Reviewed by:

Pete Whebbe


Metrologist



Receipt Date: March 13, 2015
 Test Date: March 18, 2015
 Report Date: March 18, 2015

State Test No.: 333961
 Serial No.: 051320997-0103
 Barcode: 202318

Calibration Report

O'DAY EQUIPMENT LLC
 635 31ST ST SE
 MINOT, ND 58701
 Contact: KIM GREEK
 Phone: 701-240-2042
 PO Number: NONE
 SOP: 33
 Technician ID: 07

Item(s) Submitted: 100 Gallon Prover
 Manufacturer: DETERMAN BROWNIE INC
 Material: Stainless Steel
 Description: Dry Bottom
 Condition: Good
 Temperature: 19.2°C
 Pressure: 743.6 mmHg
 Relative Humidity: 26. %

Nominal Volume		Volume (gallons)	Error (in ³)	Uncertainty (in ³)	Coefficient of Expansion(°F)
100 gal	As Found	100.014	3.1	3.0	0.0000265
	As Left	100.002	0.4	3.0	

Neck Calibration: No neck calibration was done at this time.

This prover has been calibrated as a "to contain after wet down" vessel with a drain time of 30 seconds after cessation of full flow and at a reference temperature of 60 °F.

The prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.


Results apply to item identified in this report only.

Mark Nicollet


 Quality Manager

Reviewed by:

Pete Whebbe


 Metrologist



Receipt Date: March 13, 2015
 Test Date: March 18, 2015
 Report Date: March 18, 2015

State Test No.: 333962
 Serial No.: 44753
 Barcode: 202355

Calibration Report

O'DAY EQUIPMENT LLC
 635 31ST ST SE
 MINOT, ND 58701
 Contact: KIM GREEK
 Phone: 701-240-2042
 PO Number: NONE
 SOP: 34
 Technician ID: 07

Item(s) Submitted: 100 gallon LPG Prover
 Manufacturer: ARROW TANK
 Material: Mild Steel
 Description: Wet Bottom
 Condition: Good
 Temperature: 19.7°C
 Pressure: 742.6 mmHg
 Relative Humidity: 29. %

Nominal Volume	Error As Found (in ³)	Error As Left (in ³)	Uncertainty (in ³)	Coefficient of Expansion(°F)
100 gal	-7	-7	10	0.0000186

Neck Calibration: No neck calibration was done at this time.

This prover has been calibrated as a "to contain after wet down" vessel at a reference temperature of 60 °F and a reference pressure of 100 psig.

The prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95%.

Results apply to item identified in this report only.

Mark Nicollet

Mark Nicollet
 Quality Manager

Reviewed by:

Pete Whebbe

Pete J. Whebbe
 Metrologist



Receipt Date: March 13, 2015
 Test Date: March 18, 2015
 Report Date: March 18, 2015

State Test No.: 333962
 Serial No.: 44753
 Barcode: 202355

Pressure Correction Chart

O'DAY EQUIPMENT LLC
 635 31ST ST SE
 MINOT, ND 58701
 Contact: KIM GREEK
 Phone: 701-240-2042
 PO Number: NONE
 SOP: 34
 Technician ID: 07

Item(s) Submitted: 100 gallon LPG Prover
 Manufacturer: ARROW TANK
 Material: Mild Steel
 Description: Wet Bottom
 Condition: Good
 Temperature: 19.7°C
 Pressure: 742.6 mmHg
 Relative Humidity: 29. %

Pressure Gauge Reading (PSIG)	Volume Correction (gal)
0	-0.137
10	-0.126
20	-0.115
30	-0.104
40	-0.093
50	-0.082
60	-0.072
70	-0.061
80	-0.050
90	-0.039
100	-0.029
110	-0.019
120	-0.010
130	0.000
140	0.009
150	0.019
160	0.027
170	0.035
180	0.044
190	0.052
200	0.060

Mark Nicollet


 Quality Manager