



APPLICATION FOR REGISTRATION AS A REGISTERED SERVICE COMPANY
 Public Service Commission
 SFN 51277 (2/2014)



TYPE OR PRINT - AN INCOMPLETE OR ILLEGIBLE APPLICATION WILL BE REJECTED

Name of Company Hobbs Inc.	Email Address hobbs one@btinet.net	Application Date 3/23/15	
Mailing Address 2389 Business Loop I-94	City Mandan	State ND	Zip Code 58554
Telephone Number 701-663-6363	Cell Phone Number	Fax Number 701-663-9220	

Select below all device types your company will certify:

Scales (include maximum capacity, if applicable)	Liquid (include maximum flow rate, if applicable)
<input type="checkbox"/> 1. Rail <input type="checkbox"/> 2. Truck <input type="checkbox"/> 3. Livestock <input type="checkbox"/> 4. Hopper: Max. Capacity: _____ <input type="checkbox"/> 5. Belt <input type="checkbox"/> 6. Over 30 lbs.: Max. Capacity: _____ <input type="checkbox"/> 7. 30 lbs. or less <input type="checkbox"/> 8. Class II (indicate on your calibration report which weight kit is Class II certified) <input type="checkbox"/> 9. Other: Please List:	<input checked="" type="checkbox"/> 1. Retail Fuel (less than 20 gal. per minute) <input checked="" type="checkbox"/> 2. High Flow Retail Fuel (20 gal. per minute or greater) <input checked="" type="checkbox"/> 3. Vehicle Tank: Max. Flow Rate: <u>120</u> <input checked="" type="checkbox"/> 4. Stationary Bulk (fuel or oil): Max. Flow Rate: <u>200</u> <input type="checkbox"/> 5. LPG <input type="checkbox"/> 6. Stationary LPG <input type="checkbox"/> 7. Fertilizer: Max. Flow Rate: _____ <input type="checkbox"/> 8. Chemical <input type="checkbox"/> 9. Anhydrous <input type="checkbox"/> 10. Loading Rack <input type="checkbox"/> 11. Other: Please List:

List below all persons employed by your company as a North Dakota Registered Service Person and the device types they are registered to certify (attach a separate sheet to list additional employees):

Permit No.	Employee	Device Types Registered to Certify (list using device type numbers from above)
e.g. 1001	e.g. John Doe	e.g. Scales - 2, 3, 6, 8; e.g. Liquid - 1, 2, 6
1753	LAURA Krenelica	1, 2, 3, 4
1755	Matt Wilkms	1, 2, 3, 4

Continued on Page 2



List below all field standards (attach current calibration reports):

100 Gallon - SS	
1 SERAPHIN SS 5 GAL	
1 SERAPHIN SS 5 GAL	
1 MILD STEEL 5 GAL	
1 MILD STEEL 5 GAL	


Additional Application Items (initial where appropriate):

Standardized Test Report	<input type="checkbox"/> Copy enclosed
	<input checked="" type="checkbox"/> No change in report filed previously
Tested and Approved Sticker	<input type="checkbox"/> Copy enclosed
	<input checked="" type="checkbox"/> No change in sticker filed previously
Photocopy of Crimped Lead Wire Seal	<input type="checkbox"/> Copy enclosed
	<input checked="" type="checkbox"/> No change in crimped lead wire seal filed previously

Public Company Listing:

Include my company information on your registered service company list for public contact.
 Yes No

I am TODD KRENELKA, and have authority to represent this company.
 By signing this application, I declare that I have examined this form and accompanying documentation, and to the best of my knowledge and belief, the facts stated and documentation provided is true, correct, and complete.

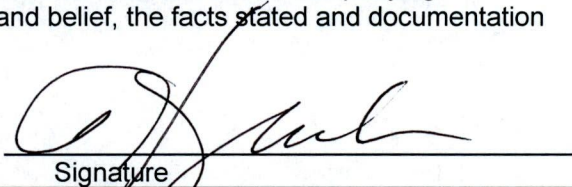


 Signature

Send Completed Application and Related Documents To:

Public Service Commission
 600 E Boulevard Ave Dept 408
 Bismarck ND 58505-0480
Telephone: (701) 328-2400
Fax: (701) 328-2410

North Dakota

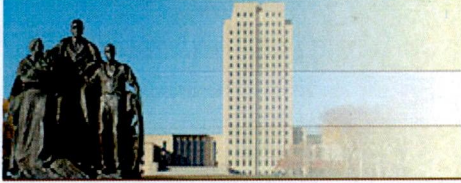nd.gov Official Portal for
North Dakota State GovernmentNorth Dakota
LEGENDARY

SECRETARY OF STATE NORTH DAKOTA


[Home](#) | [Business Records Search](#)

HOBBS, INC.

Corporation Details

System ID: 1215100 **Phone:** (701) 663-6363
Type: BUSINESS CORPORATION
Status: Active & Good Standing
Original File Date: 05/09/1966 **Effective Date:** 05/09/1966
State of Origin: North Dakota

Nature of Business

PETROLEUM EQUIPMENT SERVICE & SALES

Principal Office

2389 BUSINESS LOOP I-94 MANDAN, ND 58554-

Registered Agent

TODD KRENELKA
 2385 HWY 10
 MANDAN, ND 58554-5908
 Established Date: Sep 03, 2004

Authorized Shares

Class	Number	Par Value
	250.000000	\$.000000

Generate an Annual Report To File

To Generate a Annual Report form to be filed with the Secretary of State, select the appropriate year of the report you intend to file. This report does not contain details of a report previously filed with the Secretary of State. The annual report years reflected are an indication of the various report forms available in this site and is not an indication that an entity needs to file reports for all years. Missing years indicate that the forms for the missing year have not yet been deployed to the website, or have already been removed, and can be obtained by contacting the Secretary of State.

[2014](#) (generates a forms-fillable pdf in a new pop-up window)

[Return to Search Results](#)

[Contact Us](#)

[Disclaimer](#)

[Privacy Policy](#)

We use Secure Sockets Layer (SSL) encryption technology to ensure your information is secure and protected.

Will open a new window (pop-up).

W3C WAI AA, CSS, XHTML Compliant | Copyright 2006. All Rights Reserved. The State of North Dakota.



Receipt Date: March 13, 2015
Test Date: March 13, 2015
Report Date: March 13, 2015

State Test No.: 333955
Serial No.: 38086
Barcode: 201128

Calibration Report

HOBBS, INC.
2389 BUSINESS LOOP I-94
MANDAN, ND 58554
Contact: JEFF ENGEL
Phone: 701-663-6363
PO Number: None
SOP: 32
Technician ID: 07

Item(s) Submitted: 5 Gallon Measure
Manufacturer: Seraphin
Material: Stainless Steel
Equipment Number: None
Condition: Good
Temperature: 19.7 °C
Pressure: 738.6 mmHg
Relative Humidity: 41. %

Nominal Volume		Error (in ³)	Volume Contained		Uncertainty (in ³)	Coefficient of Expansion (°F)
			At Zero Line	(gallons)		
5 gal	As Found	-0.01		4.9999	0.62	0.0000265
	As Left	-0.01		4.9999	0.62	

Neck Calibration: No neck calibration was done at this time.

This measure or prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds, a drain time of 10 seconds after cessation of full flow and at a reference temperature of 60 °F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.

Results apply to item identified in this report only.

Mark Nicollet

Mark Nicollet
Quality Manager

Reviewed by:
Pete Whebbe

Pete Whebbe
Metrologist



Receipt Date: March 13, 2015
Test Date: March 13, 2015
Report Date: March 13, 2015

State Test No.: 333956
Serial No.: 45206
Barcode: 201129

Calibration Report

HOBBS, INC.
2389 BUSINESS LOOP I-94
MANDAN, ND 58554
Contact: JEFF ENGEL
Phone: 701-663-6363
PO Number: NONE
SOP: 32
Technician ID: 07

Item(s) Submitted: 5 Gallon Measure
Manufacturer: Seraphin
Material: Mild Steel
Equipment Number: None
Condition: Good
Temperature: 19.7 °C
Pressure: 738.6 mmHg
Relative Humidity: 41. %

Nominal Volume		Error (in ³)	Volume Contained		Uncertainty (in ³)	Coefficient of Expansion (°F)
			At Zero Line	(gallons)		
5 gal	As Found	0.18		5.0008	0.62	0.0000186
	As Left	0.18		5.0008	0.62	

Neck Calibration: No neck calibration was done at this time.

This measure or prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds, a drain time of 10 seconds after cessation of full flow and at a reference temperature of 60 °F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.

Results apply to item identified in this report only.

Mark Nicollet

Mark Nicollet
Quality Manager

Reviewed by:
Pete Whebbe

Pete J. Whebbe
Metrologist



Receipt Date: March 13, 2015
 Test Date: March 13, 2015
 Report Date: March 13, 2015

State Test No.: 333957
 Serial No.: 35213-8
 Barcode: 201130

Calibration Report

HOBBS, INC.
 2389 BUSINESS LOOP I-94
 MANDAN, ND 58554
 Contact: JEFF ENGEL
 Phone: 701-663-6363
 PO Number: NONE
 SOP: 32
 Technician ID: 07

Item(s) Submitted: 5 Gallon Measure
 Manufacturer: Seraphin
 Material: Stainless Steel
 Equipment Number: None
 Condition: Good
 Temperature: 19.7 °C
 Pressure: 738.6 mmHg
 Relative Humidity: 41. %

Nominal Volume	Error (in ³)	Volume Contained		Uncertainty (in ³)	Coefficient of Expansion (1/°F)
		At Zero Line	(gallons)		
5 gal	As Found	0.19	5.0008	0.62	0.0000265
	As Left	0.19	5.0008	0.62	

Neck Calibration: No neck calibration was done at this time.

This measure or prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds, a drain time of 10 seconds after cessation of full flow and at a reference temperature of 60 °F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.

Results apply to item identified in this report only.

Mark Nicollet

Quality Manager

Reviewed by:
 Pete Whebbe

Metrologist



Receipt Date: March 13, 2015
Test Date: March 13, 2015
Report Date: March 13, 2015

State Test No.: 333958
Serial No.: 40713
Barcode: 201131

Calibration Report

HOBBS, INC.
2389 BUSINESS LOOP I-94
MANDAN, ND 58554
Contact: JEFF ENGEL
Phone: 701-663-6363
PO Number: NONE
SOP: 32
Technician ID: 07

Item(s) Submitted: 5 Gallon Measure
Manufacturer: Seraphin
Material: Stainless Steel
Equipment Number: None
Condition: Good
Temperature: 19.7 °C
Pressure: 738.6 mmHg
Relative Humidity: 41. %

Nominal Volume	Error (in ³)	Volume Contained		Uncertainty (in ³)	Coefficient of Expansion (°F)
		At Zero Line	(gallons)		
5 gal	As Found	0.09	5.0004	0.62	0.0000265
	As Left	0.09	5.0004	0.62	

Neck Calibration: No neck calibration was done at this time.

This measure or prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds, a drain time of 10 seconds after cessation of full flow and at a reference temperature of 60 °F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.

Results apply to item identified in this report only.

Mark Nicollet

Quality Manager

Reviewed by:

Pete Whebbe

Metrologist



Receipt Date: March 13, 2015
 Test Date: March 13, 2015
 Report Date: March 13, 2015

State Test No.: 333959
 Serial No.: 1362
 Barcode: 201127

Calibration Report

HOBBS, INC.
 2389 BUSINESS LOOP I-94
 MANDAN, ND 58554
 Contact: JEFF ENGEL
 Phone: 701-663-6363
 PO Number: NONE
 SOP: 33
 Technician ID: 07

Item(s) Submitted: 100 Gallon Prover
 Manufacturer: Gas Service & Supply
 Material: Stainless Steel
 Description: Dry Bottom
 Condition: Good
 Temperature: 48.9°C
 Pressure: 738.5 mmHg
 Relative Humidity: 41. %

Nominal Volume		Volume (gallons)	Error (in ³)	Uncertainty (in ³)	Coefficient of Expansion(°F)
100 gal	As Found	100.002	0.4	3.0	0.0000265
	As Left	100.002	0.4	3.0	

Neck Calibration: No neck calibration was done at this time.

This prover has been calibrated as a "to contain after wet down" vessel with a drain time of 30 seconds after cessation of full flow and at a reference temperature of 60 °F.

The prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.

Results apply to item identified in this report only.

Mark Nicollet

Mark Nicollet
 Quality Manager

Reviewed by:
 Pete Whebbe

Pete Whebbe
 Metrologist