



**APPLICATION FOR REGISTRATION AS A REGISTERED SERVICE COMPANY**

Public Service Commission  
SFN 51277 (2/2014)



**TYPE OR PRINT - AN INCOMPLETE OR ILLEGIBLE APPLICATION WILL BE REJECTED**

|   |  |                                    |                          |
|---|--|------------------------------------|--------------------------|
| <b>Name of Company</b><br>Petroleum Calibration Service | <b>Email Address</b><br>PetroleumCalibration@gmail.com | <b>Application Date</b><br>7/10/15 |                          |
| <b>Mailing Address</b><br>203 E. Hwy 61                 | <b>City</b><br>Estes                                   | <b>State</b><br>MN                 | <b>Zip Code</b><br>55733 |
| <b>Telephone Number</b>                                 | <b>Cell Phone Number</b><br>218 213 6532               | <b>Fax Number</b>                  |                          |

Select below all device types your company will certify:

| Scales (include maximum capacity, if applicable)  | Liquid (include maximum flow rate, if applicable)  |
|---|--|
| <input type="checkbox"/> 1. Rail<br><input type="checkbox"/> 2. Truck<br><input type="checkbox"/> 3. Livestock<br><input type="checkbox"/> 4. Hopper: Max. Capacity: _____<br><input type="checkbox"/> 5. Belt<br><input type="checkbox"/> 6. Over 30 lbs.: Max. Capacity: _____<br><input type="checkbox"/> 7. 30 lbs. or less<br><input type="checkbox"/> 8. Class II (indicate on your calibration report which weight kit is Class II certified)<br><input type="checkbox"/> 9. Other: Please List: | <input checked="" type="checkbox"/> 1. Retail Fuel (less than 20 gal. per minute)<br><input type="checkbox"/> 2. High Flow Retail Fuel (20 gal. per minute or greater)<br><input type="checkbox"/> 3. Vehicle Tank: Max. Flow Rate: _____<br><input type="checkbox"/> 4. Stationary Bulk (fuel or oil):<br>Max. Flow Rate: _____<br><input type="checkbox"/> 5. LPG<br><input type="checkbox"/> 6. Stationary LPG<br><input type="checkbox"/> 7. Fertilizer: Max. Flow Rate: _____<br><input type="checkbox"/> 8. Chemical<br><input type="checkbox"/> 9. Anhydrous<br><input type="checkbox"/> 10. Loading Rack<br><input type="checkbox"/> 11. Other: Please List: |

List below all persons employed by your company as a North Dakota Registered Service Person and the device types they are registered to certify (attach a separate sheet to list additional employees):

| Permit No. | Employee       | Device Types Registered to Certify (list using device type numbers from above) |
|------------|----------------|--|
| e.g. 1001  | e.g. John Doe  | e.g. Scales - 2, 3, 6, 8; e.g. Liquid - 1, 2, 6                                |
| 1625       | Eugene H Lewis | Liquid - Retail Fuel (less than 20)  |
|            |                |  |
|            |                |  |
|            |                |  |
|            |                |  |
|            |                |  |



List below all field standards (attach current calibration reports):

|                 |             |
|-----------------|-------------|
| Seraphim 5 Gal. | 49433-A     |
|                 | 49433-B     |
|                 | 49433-C     |
|                 | 00-13651-15 |
|                 |             |
|                 |             |
|                 |             |
|                 |             |
|                 |             |


Additional Application Items (initial where appropriate):

|                                     |   |
|-------------------------------------|---|
| Standardized Test Report            | <input checked="" type="checkbox"/> Copy enclosed<br><input type="checkbox"/> No change in report filed previously      |
| Tested and Approved Sticker         | <input type="checkbox"/> Copy enclosed<br><input type="checkbox"/> No change in sticker filed previously                |
| Photocopy of Crimped Lead Wire Seal | <input type="checkbox"/> Copy enclosed<br><input type="checkbox"/> No change in crimped lead wire seal filed previously |

Public Company Listing:

Include my company information on your registered service company list for public contact.  
 Yes     No

I am Eugene H Lewis, and have authority to represent this company.  
By signing this application, I declare that I have examined this form and accompanying documentation, and to the best of my knowledge and belief, the facts stated and documentation provided is true, correct, and complete.

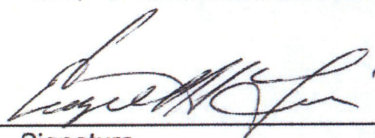  
\_\_\_\_\_  
Signature

Send Completed Application and Related Documents To:

Public Service Commission  
600 E Boulevard Ave Dept 408  
Bismarck ND 58505-0480  
Telephone: (701) 328-2400  
Fax: (701) 328-2410

**Bauske, Shelly A.**

---

**From:** Eugene Lewis <petroleumcalibration@gmail.com>  
**Sent:** Tuesday, July 14, 2015 2:42 PM  
**To:** Bauske, Shelly A.  
**Subject:** Re: North Dakota placed in service application

Shelly:

Sorry for the incomplete form, there are no changes to the test form, stickers or seals, everything remains the same.

Thanks for your help.

Regards,  
Gene Lewis

On Tue, Jul 14, 2015 at 1:47 PM, Bauske, Shelly A. <[sbauske@nd.gov](mailto:sbauske@nd.gov)> wrote:

Hi Gene

Please resubmit your Application for Registration as a Registered Service Company, completing the Additional Application Items section or just email me the answers and I will attach your email to the application previously submitted.

Thank you!


**From:** Eugene Lewis [mailto:[petroleumcalibration@gmail.com](mailto:petroleumcalibration@gmail.com)]  
**Sent:** Friday, July 10, 2015 3:56 PM  
**To:** Bauske, Shelly A.  
**Subject:** North Dakota placed in service application

Shelly:

Attached is my application and copies of my prover inspection certificates. I believe this is all you will need to renew my Registered Service Company registration.

Please let me know if you need any other information.

Regards,

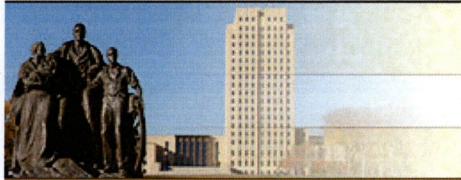

# SECRETARY OF STATE NORTH DAKOTA

[Home](#) | [Business Records Search](#)

## PETROLEUM CALIBRATION SERVICE LLC

### Corporation Details

**System ID:** 21146000**Phone:** (218) 213-6556**Type:** FOREIGN LIMITED LIABILITY COMPANY**Status:** Active & Good Standing**Original File Date:** 08/01/2005**Effective Date:** 08/01/2005**State of Origin:** Minnesota

### Nature of Business

TEST &amp; CALIBRATE RETAIL MOTOR FUEL DISPENSORS

### Principal Office

203 E HIGHWAY 61 ESKO, MN 55733-9610

### Registered Agent

**BUSINESS FILINGS INCORPORATED**

314 E THAYER AVE


BISMARCK, ND 58501-4018

Established Date: Dec 22, 2014

### Generate an Annual Report To File

To Generate a Annual Report form to be filed with the Secretary of State, select the appropriate year of the report you intend to file. This report does not contain details of a report previously filed with the Secretary of State. The annual report years reflected are an indication of the various report forms available in this site and is not an indication that an entity needs to file reports for all years. Missing years indicate that the forms for the missing year have not yet been deployed to the website, or have already been removed, and can be obtained by contacting the Secretary of State.

[2014](#) (generates a forms-fillable pdf in a new pop-up window)[Return to Search Results](#)[Contact Us](#)[Disclaimer](#)[Privacy Policy](#)

 We use Secure Sockets Layer (SSL) encryption technology to ensure your information is secure and protected.

 Will open a new window (pop-up).

W3C WAI AA, CSS, XHTML Compliant | Copyright 2006. All Rights Reserved. The State of North Dakota.



Receipt Date: July 7, 2015  
Test Date: July 7, 2015  
Report Date: July 7, 2015

State Test No.: 334  
Serial No.: 4943  
Barcode: 201

## Calibration Report

PETROLEUM CALIBRATION SERVICE  
203 E HWY 61  
ESKO, MN 55733  
Contact: GENE LEWIS  
Phone: 218-213-6556  
PO Number: NONE  
SOP: 32  
Technician ID: 11

Item(s) Submitted: 5 Gallon Measure  
Manufacturer: Seraphin  
Material: Stainless Steel  
Equipment Number: None  
Condition: Good  
Temperature: 21.8 °C  
Pressure: 741. mmHg  
Relative Humidity: 39. %  
Standard H<sub>2</sub>O Temp.: 24.1 °C  
Artifact H<sub>2</sub>O Temp.: 24.3 °C

| Nominal<br>Volume (gal) |          | Error (in <sup>3</sup> ) | Volume at Zero<br>Line (gal) | Uncertainty (in <sup>3</sup> ) | Coefficient<br>Expansion ( |
|-------------------------|----------|--------------------------|------------------------------|--------------------------------|----------------------------|
| 5                       | As Found | 0.07                     | 5.0003                       | 0.62                           | 0.000026                   |
|                         | As Left  | 0.07                     | 5.0003                       | 0.62                           |                            |

Neck Calibration: No neck calibration was done at this time.

This measure or prover has been calibrated as a "to contain after wet down" vessel with a drain time of 30 seconds after cessation of full flow and at a reference temperature of 60 °F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota using water as the calibration medium. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.

Results apply to item identified in this report only.

Pete Whebbe

Metrologist

Reviewed by:  
Mark Nicollet

Quality Manager



Receipt Date: June 17, 2015  
Test Date: June 22, 2015  
Report Date: June 23, 2015

State Test No.: 334416  
Serial No.: 49433-B  
Barcode: 202262

## Calibration Report

PETROLEUM CALIBRATION SERVICE  
203 E HWY 61  
ESKO, MN 55733  
Contact: GENE LEWIS  
Phone: 218-213-6556  
PO Number: NONE  
SOP: 32  
Technician ID: 11

Item(s) Submitted: 5 Gallon Prover  
Manufacturer: Seraphin  
Material: Stainless Steel  
Equipment Number: None  
Condition: Good  
Temperature: 24.6 °C  
Pressure: 722.2 mmHg  
Relative Humidity: 47. %  
Standard H<sub>2</sub>O Temp.: 24.7 °C  
Artifact H<sub>2</sub>O Temp.: 24.5 °C

| Nominal<br>Volume (gal) |          | Error (in <sup>3</sup> ) | Volume at Zero<br>Line (gal) | Uncertainty (in <sup>3</sup> ) | Coefficient of<br>Expansion (1/°F) |
|-------------------------|----------|--------------------------|------------------------------|--------------------------------|------------------------------------|
| 5                       | As Found | 0.79                     | 5.0034                       | 0.62                           | 0.0000265                          |
|                         | As Left  | -0.01                    | 4.9999                       | 0.62                           |                                    |

Neck Calibration: No neck calibration was done at this time.

This measure or prover has been calibrated as a "to contain after wet down" vessel with a drain time of 30 seconds after cessation of full flow and at a reference temperature of 60 °F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota using water as the calibration medium. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.

Results apply to item identified in this report only.

Pete Whebbe

*Pete Whebbe*  
Metrologist

Reviewed by:

Benjamin FitzPatrick

*Benjamin FitzPatrick*  
Deputy Director



Receipt Date: June 17, 2015  
Test Date: June 22, 2015  
Report Date: June 23, 2015

State Test No.: 334414  
Serial No.: 49433-C  
Barcode: 201324

## Calibration Report

PETROLEUM CALIBRATION SERVICE  
203 E HWY 61  
ESKO, MN 55733  
Contact: GENE LEWIS  
Phone: 218-213-6556  
PO Number: NONE  
SOP: 32  
Technician ID: 11

Item(s) Submitted: 5 Gallon Prover  
Manufacturer: Seraphin  
Material: Stainless Steel  
Equipment Number: None  
Condition: Good  
Temperature: 24.6 °C  
Pressure: 722.2 mmHg  
Relative Humidity: 47. %  
Standard H<sub>2</sub>O Temp.: 24.7 °C  
Artifact H<sub>2</sub>O Temp.: 24.6 °C

| Nominal<br>Volume (gal) |          | Error (in <sup>3</sup> ) | Volume at Zero<br>Line (gal) | Uncertainty (in <sup>3</sup> ) | Coefficient of<br>Expansion (1/°F) |
|-------------------------|----------|--------------------------|------------------------------|--------------------------------|------------------------------------|
| 5                       | As Found | -0.15                    | 4.9994                       | 0.62                           | 0.0000265                          |
|                         | As Left  | -0.15                    | 4.9994                       | 0.62                           |                                    |

Neck Calibration: No neck calibration was done at this time.

This measure or prover has been calibrated as a "to contain after wet down" vessel with a drain time of 30 seconds after cessation of full flow and at a reference temperature of 60 °F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota using water as the calibration medium. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.

Results apply to item identified in this report only.

Pete Whebbe

*Peter J. Whebbe*  
Metrologist

Reviewed by:

Benjamin FitzPatrick

*Benjamin FitzPatrick*  
Deputy Director



Receipt Date: June 17, 2015  
Test Date: June 22, 2015  
Report Date: June 23, 2015

State Test No.: 334415  
Serial No.: 00-13651-15  
Barcode: 201325

## Calibration Report

PETROLEUM CALIBRATION SERVICE  
203 E HWY 61  
ESKO, MN 55733  
Contact: GENE LEWIS  
Phone: 218-213-6556  
PO Number: NONE  
SOP: 32  
Technician ID: 11

Item(s) Submitted: 5 Gallon Prover  
Manufacturer: Seraphin  
Material: Stainless Steel  
Equipment Number: None  
Condition: Good  
Temperature: 24.6 °C  
Pressure: 722.2 mmHg  
Relative Humidity: 47. %  
Standard H<sub>2</sub>O Temp.: 24.6 °C  
Artifact H<sub>2</sub>O Temp.: 24.7 °C

| Nominal<br>Volume (gal) |          | Error (in <sup>3</sup> ) | Volume at Zero<br>Line (gal) | Uncertainty (in <sup>3</sup> ) | Coefficient of<br>Expansion (1/°F) |
|-------------------------|----------|--------------------------|------------------------------|--------------------------------|------------------------------------|
| 5                       | As Found | -0.04                    | 4.9998                       | 0.62                           | 0.0000265                          |
|                         | As Left  | -0.04                    | 4.9998                       | 0.62                           |                                    |

Neck Calibration: No neck calibration was done at this time.

This measure or prover has been calibrated as a "to contain after wet down" vessel with a drain time of 30 seconds after cessation of full flow and at a reference temperature of 60 °F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota using water as the calibration medium. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.

Results apply to item identified in this report only.

Pete Whebbe

*Pete Whebbe*  
Metrologist

Reviewed by:

Benjamin FitzPatrick

*Benjamin FitzPatrick*  
Deputy Director