



APPLICATION FOR REGISTRATION AS A REGISTERED SERVICE COMPANY
 Public Service Commission
 SFN 51277 (2/2014)



TYPE OR PRINT - AN INCOMPLETE OR ILLEGIBLE APPLICATION WILL BE REJECTED

Name of Company Reiter Oil & Gas INC	Email Address acreiter@srt.com	Application Date 4-15-15	
Mailing Address PO Box 2226	City Minot	State ND	Zip Code 58702
Telephone Number 701-839-6791	Cell Phone Number 701-720-1090	Fax Number 701-838-6400	

Select below all device types your company will certify:

Scales (include maximum capacity, if applicable)	Liquid (include maximum flow rate, if applicable)
<input type="checkbox"/> 1. Rail <input type="checkbox"/> 2. Truck <input type="checkbox"/> 3. Livestock <input type="checkbox"/> 4. Hopper: Max. Capacity: _____ <input type="checkbox"/> 5. Belt <input type="checkbox"/> 6. Over 30 lbs.: Max. Capacity: _____ <input type="checkbox"/> 7. 30 lbs. or less <input type="checkbox"/> 8. Class II (indicate on your calibration report which weight kit is Class II certified) <input type="checkbox"/> 9. Other: Please List:	<input checked="" type="checkbox"/> 1. Retail Fuel (less than 20 gal. per minute) <input checked="" type="checkbox"/> 2. High Flow Retail Fuel (20 gal. per minute or greater) <input type="checkbox"/> 3. Vehicle Tank: Max. Flow Rate: _____ <input type="checkbox"/> 4. Stationary Bulk (fuel or oil): Max. Flow Rate: _____ <input type="checkbox"/> 5. LPG <input type="checkbox"/> 6. Stationary LPG <input type="checkbox"/> 7. Fertilizer: Max. Flow Rate: _____ <input type="checkbox"/> 8. Chemical <input type="checkbox"/> 9. Anhydrous <input type="checkbox"/> 10. Loading Rack <input type="checkbox"/> 11. Other: Please List:

List below all persons employed by your company as a North Dakota Registered Service Person and the device types they are registered to certify (attach a separate sheet to list additional employees):

Permit No.	Employee	Device Types Registered to Certify (list using device type numbers from above)
e.g. 1001	e.g. John Doe	e.g. Scales - 2, 3, 6, 8; e.g. Liquid - 1, 2, 6
1358	Rick Reiter	
1357	Kevin Reiter	
1356	Dale Reiter	

Continued on Page 2



Application for Registration as a Registered Service Company
Page 2



List below all field standards (attach current calibration reports):

4- 5 Gal Test Cans	
1- 100 Gal Refind Prover	

Additional Application Items (initial where appropriate):

Standardized Test Report	<input type="checkbox"/> Copy enclosed <input checked="" type="checkbox"/> No change in report filed previously
Tested and Approved Sticker	<input type="checkbox"/> Copy enclosed <input checked="" type="checkbox"/> No change in sticker filed previously
Photocopy of Crimped Lead Wire Seal	<input type="checkbox"/> Copy enclosed <input checked="" type="checkbox"/> No change in crimped lead wire seal filed previously

Public Company Listing:

Include my company information on your registered service company list for public contact.
 Yes No

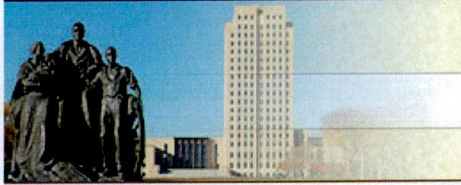
I am Kevin Reiter, and have authority to represent this company.
By signing this application, I declare that I have examined this form and accompanying documentation, and to the best of my knowledge and belief, the facts stated and documentation provided is true, correct, and complete.

Signature

Send Completed Application and Related Documents To:

Public Service Commission
600 E Boulevard Ave Dept 408
Bismarck ND 58505-0480
Telephone: (701) 328-2400
Fax: (701) 328-2410

North Dakota

nd.gov Official Portal for
North Dakota State GovernmentNorth Dakota
LEGENDARY

SECRETARY OF STATE NORTH DAKOTA


[Home](#) | [Business Records Search](#)

REITER OIL & GAS INC.

Corporation Details

System ID: 16420200 **Phone:** (701) 839-6791
Type: BUSINESS CORPORATION
Status: Active & Good Standing
Original File Date: 02/17/2006 **Effective Date:** 02/17/2006
State of Origin: North Dakota

Nature of Business

PETROLEUM EQUIPMENT SALES & REPAIRS

Principal Office

5705 11TH AVE SE MINOT, ND 58701-9306

Registered Agent

DALE REITER
 5705 11TH AVE SE
 MINOT, ND 58701-9306
 Established Date: Feb 17, 2006

Authorized Shares

Class	Number	Par Value
	50000.000000	\$1.000000

Generate an Annual Report To File

To Generate a Annual Report form to be filed with the Secretary of State, select the appropriate year of the report you intend to file. This report does not contain details of a report previously filed with the Secretary of State. The annual report years reflected are an indication of the various report forms available in this site and is not an indication that an entity needs to file reports for all years. Missing years indicate that the forms for the missing year have not yet been deployed to the website, or have already been removed, and can be obtained by contacting the Secretary of State.

[2014](#) (generates a forms-fillable pdf in a new pop-up window)

[Return to Search Results](#)

[Contact Us](#)
[Disclaimer](#) | [Privacy Policy](#)

We use Secure Sockets Layer (SSL) encryption technology to ensure your information is secure and protected.

Will open a new window (pop-up).

W3C WAI AA, CSS, XHTML Compliant | Copyright 2006. All Rights Reserved. The State of North Dakota.



Receipt Date: April 9, 2015
Test Date: April 9, 2015
Report Date: April 9, 2015

State Test No.: 334113
Serial No.: 43942
Barcode: 202305

Calibration Report

REITER OIL & GAS INC.
P O BOX 2226
MINOT, ND 58702
Contact: KEVIN REITER
Phone: 701-839-6791
PO Number: NONE
SOP: 32
Technician ID: 11

Item(s) Submitted: 5 Gallon Measure
Manufacturer: Seraphin
Material: Mild Steel
Equipment Number: None
Condition: Good
Temperature: 19.7 °C
Pressure: 729.6 mmHg
Relative Humidity: 40. %

Nominal Volume		Error (in ³)	Volume Contained	Uncertainty (in ³)	Coefficient of Expansion (°F)
			At Zero Line (gallons)		
5 gal	As Found	-0.35	4.9985	0.62	0.0000186
	As Left	0.00	5.0000	0.62	

Neck Calibration: No neck calibration was done at this time.

This measure or prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds, a drain time of 10 seconds after cessation of full flow and at a reference temperature of 60 °F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.

Results apply to item identified in this report only.

Pete Whebbe

Metrologist

Reviewed by:

Mark Nicollet

Quality Manager



Receipt Date: April 9, 2015
Test Date: April 9, 2015
Report Date: April 9, 2015

State Test No.: 334114
Serial No.: RG01
Barcode: 202306

Calibration Report

REITER OIL & GAS INC.
P O BOX 2226
MINOT, ND 58702
Contact: KEVIN REITER
Phone: 701-839-6791
PO Number: NONE
SOP: 32
Technician ID: 11

Item(s) Submitted: 5 Gallon Measure
Manufacturer: Seraphin
Material: Mild Steel
Equipment Number: None
Condition: Good
Temperature: 19.7 °C
Pressure: 729.6 mmHg
Relative Humidity: 40. %

Nominal Volume		Error (in ³)	Volume Contained		Coefficient of Expansion (°F)
			At Zero Line (gallons)	Uncertainty (in ³)	
5 gal	As Found	0.06	5.0002	0.62	0.0000186
	As Left	0.06	5.0002	0.62	

Neck Calibration: No neck calibration was done at this time.

This measure or prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds, a drain time of 10 seconds after cessation of full flow and at a reference temperature of 60 °F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.

Results apply to item identified in this report only.

Pete Whebbe

Metrologist

Reviewed by:

Mark Nicollet

Quality Manager



Receipt Date: April 9, 2015
Test Date: April 9, 2015
Report Date: April 9, 2015

State Test No.: 334115
Serial No.: 43918
Barcode: 202307

Calibration Report

REITER OIL & GAS INC.
P O BOX 2226
MINOT, ND 58702
Contact: KEVIN REITER
Phone: 701-839-6791
PO Number: NONE
SOP: 32
Technician ID: 11

Item(s) Submitted: 5 Gallon Measure
Manufacturer: Seraphin
Material: Mild Steel
Equipment Number: None
Condition: Good
Temperature: 19.7 °C
Pressure: 729.6 mmHg
Relative Humidity: 40. %

Nominal Volume	Error (in ³)	Volume Contained		Uncertainty (in ³)	Coefficient of Expansion (°F)
		At Zero Line	(gallons)		
5 gal	As Found	-0.10	4.9996	0.62	0.0000186
	As Left	-0.10	4.9996	0.62	

Neck Calibration: No neck calibration was done at this time.

This measure or prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds, a drain time of 10 seconds after cessation of full flow and at a reference temperature of 60 °F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.

Results apply to item identified in this report only.

Pete Whebbe

Peter J. Whebbe
Metrologist

Reviewed by:
Mark Nicollet

Mark Nicollet
Quality Manager



Receipt Date: April 9, 2015
Test Date: April 9, 2015
Report Date: April 9, 2015

State Test No.: 334116
Serial No.: 13-91114
Barcode: 202509

Calibration Report

REITER OIL & GAS INC.
P O BOX 2226
MINOT, ND 58702
Contact: KEVIN REITER
Phone: 701-839-6791
PO Number: NONE
SOP: 32
Technician ID: 11

Item(s) Submitted: 5 Gallon Measure
Manufacturer: Seraphin
Material: Stainless Steel
Equipment Number: None
Condition: Excellent
Temperature: 19.7 °C
Pressure: 729.6 mmHg
Relative Humidity: 40. %

Nominal Volume		Error (in ³)	Volume Contained	Uncertainty (in ³)	Coefficient of Expansion (°F)
			At Zero Line (gallons)		
5 gal	As Found	-0.06	4.9998	0.62	0.0000265
	As Left	-0.06	4.9998	0.62	

Neck Calibration: No neck calibration was done at this time.

This measure or prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds, a drain time of 10 seconds after cessation of full flow and at a reference temperature of 60 °F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.

Results apply to item identified in this report only.

Pete Whebbe

Metrologist

Reviewed by:

Mark Nicollet

Quality Manager



Receipt Date: April 9, 2015
Test Date: April 9, 2015
Report Date: April 9, 2015

State Test No.: 334112
Serial No.: 101011122-0101
Barcode: 201648

Calibration Report

REITER OIL & GAS INC.
P O BOX 2226
MINOT, ND 58702

Contact: KEVIN REITER
Phone: 701-839-6791
PO Number: NONE
SOP: 33
Technician ID: 07

Item(s) Submitted: 100 Gallon Prover
Manufacturer: Determan Brownie
Material: Stainless Steel (304)
Description: Dry Bottom
Condition: Excellent
Temperature: 19.7°C
Pressure: 729.6 mmHg
Relative Humidity: 39. %

Nominal Volume		Volume (gallons)	Error (in ³)	Uncertainty (in ³)	Coefficient of Expansion(/°F)
100 gal	As Found	100.000	0.1	3.0	0.0000288
	As Left	100.000	0.1	3.0	

Neck Calibration: No neck calibration was done at this time.


This prover has been calibrated as a "to contain after wet down" vessel with a drain time of 30 seconds after cessation of full flow and at a reference temperature of 60 °F.

The prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.

Results apply to item identified in this report only.

Mark Nicollet


Quality Manager

Reviewed by:

Pete Whebbe


Metrologist

United States Department of Commerce National Institute of Standards and Technology

Certificate of Metrological Traceability For:

Minnesota

This laboratory has demonstrated evidence of an unbroken chain of metrological traceability of its standards to the international system of units (SI), documented measurement uncertainties, uses documented measurement procedures, successfully completed training and proficiency tests, documented calibration intervals, submitted a quality management system, and demonstrated suitable measurement assurance for the Scope listed on this certificate.



The Office of Weights and Measures Program assesses laboratories to NIST Handbook 143 - Program Handbook for State Weights and Measures Laboratories and ISO/IEC 17025:2005.

2015

Scope

Mass Echelon II

50 kg to 1 mg
1000 lb to 0.001 lb
4 oz to 0.03125 oz

Mass Echelon III

50 kg to 1 mg
5000 lb to 0.001 lb
4 oz to 0.03125 oz

Weight Carts

10 000 lb to 2000 lb

Wheel Load Weighers

20 000 lb to 2000 lb

Railroad Test Cars

110 000 lb to 80 000 lb

Volume Gravimetric, I

20 L to 1 mL
100 gal to 0.25 qt

Volume Transfer, II

1500 gal to 5 gal
100 gal to 25 gal LPG

A handwritten signature in blue ink that reads "Carol T. Hockert".

Carol T. Hockert, Chief
NIST Office of Weights and Measures

Effective Dates: 2015-01-01 to 2015-12-31