




APPLICATION FOR REGISTRATION AS A REGISTERED SERVICE COMPANY
Public Service Commission
SFN 61277 (2/2014)

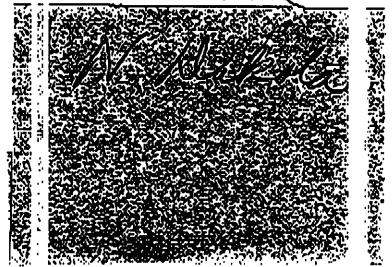

TYPE OR PRINT - AN INCOMPLETE OR ILLEGIBLE APPLICATION WILL BE REJECTED

Name of Company <i>Rollies Sales & Serv</i>		Email Address <i>Rollies09@rollies.com</i>		Application Date <i>10/2015</i>	
Mailing Address <i>P.O. BOX E</i>		City <i>OSAKIS</i>		State <i>ND</i>	Zip Code <i>58660</i>
Telephone Number <i>320-859-4811</i>		Cell Phone Number <i>320-298-4406</i>		Fax Number <i>320-859-8585</i>	

Select below all device types your company will certify:

Scales (include maximum capacity, if applicable)	Liquid (include maximum flow rate, if applicable)
<input type="checkbox"/> 1. Rail	<input checked="" type="checkbox"/> 1. Retail Fuel (less than 20 gal. per minute)
<input type="checkbox"/> 2. Truck	<input checked="" type="checkbox"/> 2. High Flow Retail Fuel (20 gal. per minute or greater)
<input type="checkbox"/> 3. Livestock	<input checked="" type="checkbox"/> 3. Vehicle Tank: Max. Flow Rate: <i>100</i>
<input type="checkbox"/> 4. Hopper: Max. Capacity: _____	<input checked="" type="checkbox"/> 4. Stationary Bulk (fuel or oil): Max. Flow Rate: <i>100</i>
<input type="checkbox"/> 5. Belt	<input type="checkbox"/> 5. LPG
<input type="checkbox"/> 6. Over 30 lbs.: Max. Capacity: _____	<input type="checkbox"/> 6. Stationary LPG
<input type="checkbox"/> 7. 30 lbs. or less	<input type="checkbox"/> 7. Fertilizer: Max. Flow Rate: _____
<input type="checkbox"/> 8. Class II (indicate on your calibration report which weight kit is Class II certified)	<input type="checkbox"/> 8. Chemical
<input type="checkbox"/> 9. Other: Please List:	<input type="checkbox"/> 9. Anhydrous
	<input type="checkbox"/> 10. Loading Rack
	<input type="checkbox"/> 11. Other: Please List:

List below all persons employed by your company as North Dakota Registered Service Person and the device types they are registered to certify (attach a separate sheet to list additional employees):

Permit No.	Employee	Device Types Registered to Certify (list using device type numbers from above)
<i>01</i>	<i>Martin Roering</i>	<i>1, 2, 3, 4</i>
<i>02</i>	<i>Daniel Nathe</i>	<i>1, 2, 3, 4</i>

Continued on Page 2

Application for Registration as a Registered Service Company
Page 2

List below all field standards (attach current calibration reports):

See Attached	50 gallon
	100 gallon
	5 gallon

Additional Application Items (initial where appropriate):

Standardized Test Report	<input type="checkbox"/> Copy enclosed <input checked="" type="checkbox"/> No change in report filed previously
Tested and Approved Sticker	<input type="checkbox"/> Copy enclosed <input checked="" type="checkbox"/> No change in sticker filed previously
Photocopy of Crimped Lead Wire Seal	<input type="checkbox"/> Copy enclosed <input checked="" type="checkbox"/> No change in crimped lead wire seal filed previously

Public Company Listing:


Include my company information on your registered service company list for public contact:
 Yes No

I am Julie Fernow, and have authority to represent this company.
 By signing this application, I declare that I have examined this form and accompanying documentation, and to the best of my knowledge and belief, the facts stated and documentation provided is true, correct, and complete.

Julie Fernow
Signature

Send Completed Application and Related Documents To:
 Public Service Commission
 600 E Boulevard Ave Dept 408
 Bismarck ND 58505-0480
 Telephone: (701) 328-2400
 Fax: (701) 328-2410

North Dakota

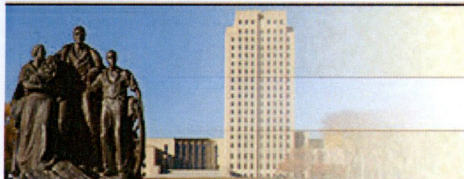nd.gov Official Portal for
North Dakota State Government

SECRETARY OF STATE NORTH DAKOTA

[Home](#) | [Business Records Search](#)

ROLLIE'S SALES & SERVICE, INC.

Corporation Details

System ID: 27402400**Phone:** (320) 859-4811**Type:** FOREIGN BUSINESS CORPORATION**Status:** Active & Good Standing**Original File Date:** 07/30/2010**Effective Date:** 07/30/2010**State of Origin:** Minnesota

Nature of Business

SERVICE

Principal Office

13790 CO RD 82 SE PO BOX E OSAKIS, MN 56360-0605

Registered Agent

HORIZON RESOURCES

209 WASHINGTON AVE

WILLISTON, ND 58801-6035

Established Date: Oct 07, 2014

Generate an Annual Report To File

To Generate a Annual Report form to be filed with the Secretary of State, select the appropriate year of the report you intend to file. This report does not contain details of a report previously filed with the Secretary of State. The annual report years reflected are an indication of the various report forms available in this site and is not an indication that an entity needs to file reports for all years. Missing years indicate that the forms for the missing year have not yet been deployed to the website, or have already been removed, and can be obtained by contacting the Secretary of State.

[2015](#) (generates a forms-fillable pdf in a new pop-up window)[Return to Search Results](#)[Contact Us](#)[Disclaimer](#)[Privacy Policy](#)

We use Secure Sockets Layer (SSL) encryption technology to ensure your information is secure and protected.

Will open a new window (pop-up).

W3C WAI AA, CSS, XHTML Compliant | Copyright 2006. All Rights Reserved. The State of North Dakota.



14305 SOUTHCROSS DRIVE # 50
 BURNSVILLE, MN 55306-7108
 MN.GOV/COMMERCE/
 651.539.1555 FAX 952.435.4140
 AN EQUAL OPPORTUNITY EMPLOYER

Receipt Date: October 20, 2015
 Test Date: October 20, 2015
 Report Date: October 20, 2015

State Test No.: 3349 1
 Serial No.: 29893 5
 Barcode: 0198 7

Calibration Report

ROLLIES SALES & SERVICE
 HIGHWAY 27 W
 OSAKIS, MN 56360-0605
 Contact: MARVIN ROERING
 Phone: 320-859-4811
 PO Number: NONE
 SOP: 32
 Technician ID: 11

Item(s) Submitted: 5 Gallon Measure
 Manufacturer: Seraphin
 Material: Stainless Steel
 Equipment Number: None
 Condition: Excellent
 Temperature: 19.8 °C
 Pressure: 735. mmHg
 Relative Humidity: 48. %
 Standard H₂O Temp.: 20.1 °C
 Artifact H₂O Temp.: 20.1 °C

Nominal Volume (gal)		Error (in ³)	Volume at Zero Line (gal)	Uncertainty (in ³)	Coefficient of Expansion (1/°F)
5	As Found	-0.02	4.9999	0.6%	0.0000265
	As Left	-0.02	4.9999	0.6%	

Neck Calibration: No neck calibration was done at this time.

This measure or prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds, a drain time of 10 seconds after cessation of full flow and at a reference temperature of 60 °F.

The measure or prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota using water as the calibration medium. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.

Results apply to item identified in this report only.

Pete Whebbe

Metrologist

Reviewed by:

Mark Nicollet

Quality Manager





14305 SOUTHCROSS DRIVE # 50
BURNSVILLE, MN 55306-7108
MN.GOV/COMMERCE/WEIGHTS
651.539.1555 FAX 952.435.4110
AN EQUAL OPPORTUNITY EMPLOYER

Receipt Date: October 20, 2015
Test Date: October 20, 2015
Report Date: October 20, 2015

State Test No.: 334963
Serial No.: None
Barcode: 019859

Calibration Report

ROLLIES SALES & SERVICE
HIGHWAY 27 W

OSAKIS, MN 56360-0605

Contact: MARYIN ROERING

Phone: 320-859-4811

PO Number: NONE

SOP: 33

Technician ID: 07

Item(s) Submitted: 50 Gallon Prover
Manufacturer: Unknown
Material: Mild Steel
Description: Dry Bottom
Condition: Good
Temperature: 20.5 °C
Pressure: 735. mmHg
Relative Humidity: 50. %
Standard H₂O Temp.: 17.3 °C
Artifact H₂O Temp.: 17.3 °C

Nominal Volume (gal)		Tested Volume (gal)	Error (in ³)	Uncertainty (in ³)	Coefficient of Expansion(°F)
50	As Found	49.999	-0.2	4.4	0.0000186
	As Left	49.999	-0.2	4.4	

Neck Calibration: No neck calibration was done at this time.

This prover has been calibrated as a "to contain after wet down" vessel with a drain time of 30 seconds after cessation of full flow and at a reference temperature of 60 °F.

The prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota using water as the calibration medium. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.

Results apply to item identified in this report only.

Mark Nicollet

Mark Nicollet
Quality Manager

Reviewed by:

Pete Whetzel

Pete Whetzel
Metrologist



MINNESOTA DEPARTMENT OF COMMERCE

WEIGHTS & MEASURES DIVISION

1305 SOUTHCROSS DRIVE #103
BURNSVILLE, MN 55306-7013
MN.GOV/COMMERCE
651.539.1555 FAX 952.435.4043
AN EQUAL OPPORTUNITY EMPLOYER

Receipt Date: October 20, 2015
Test Date: October 20, 2015
Report Date: October 20, 2015

State Test No.: 334962
Serial No.: None
Barcode: 019858

Calibration Report

ROLLIES SALES & SERVICE
HIGHWAY 27 W
OSAKIS, MN 56360-0605
Contact: MARVIN ROERING
Phone: 320-859-4811
PO Number: NONE
SOP: 33
Technician ID: 07

Item(s) Submitted: 100 Gallon Prover
Manufacturer: Unknown
Material: Mild Steel
Description: Dry Bottom
Condition: Good
Temperature: 20.2 °C
Pressure: 735.3 mmHg
Relative Humidity: 50. %
Standard H₂O Temp.: 17.6 °C
Artifact H₂O Temp.: 17.7 °C

Nominal Volume (gal)		Tested Volume (gal)	Error (in ³)	Uncertainty (in ³)	Coefficient of Expansion(°F)
100	As Found	99.994	-1.5	3.0	0.0000186
	As Left	99.994	-1.5	3.0	

Neck Calibration: No neck calibration was done at this time.

This prover has been calibrated as a "to contain after wet down" vessel with a drain time of 30 seconds after cessation of full flow and at a reference temperature of 60 °F.

The prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota using water as the calibration medium. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

The reported uncertainty conforms to NIST Technical Note 1297. The confidence interval is 95 %.

Results apply to item identified in this report only.

Mark Nicolet
Mark Nicolet
Quality Manager

Reviewed by:
Pete Whelbe
Pete Whelbe
Metrologist

United States Department of Commerce National Institute of Standards and Technology

Certificate of Metrological Traceability For:

Minnesota

This laboratory has demonstrated evidence of an unbroken chain of metrological traceability of its standards to the international system of units (SI), documented measurement uncertainties, uses documented measurement procedures, successfully completed training and proficiency tests, documented calibration intervals, submitted a quality management system, and demonstrated suitable measurement assurance for the Scope listed on this certificate.

The Office of Weights and Measures Program assesses laboratories to NIST Handbook 143 - Program Handbook for State Weights and Measures Laboratories and ISO/IEC 17025:2005.

Scope

Mass Echelon II	Weight Carts	Volume Gravimetric, I
50 kg to 1 mg	10 000 lb to 2000 lb	20 L to 1 ml
1000 lb to 0.001 lb	Wheel Load Weighers	100 gal to 0.25 qt
4 oz to 0.03125 oz	20 000 lb to 2000 lb	Volume Transfer, II
Mass Echelon III	Railroad Test Cars	1500 gal to 5 gal
50 kg to 1 mg	110 000 lb to 80 000 lb	100 gal to 25 gal LPG
5000 lb to 0.001 lb		
4 oz to 0.03125 oz		



2015

Carol T. Hocken, Chief
NIST Office of Weights and Measures

Effective Dates: 2015-01-01 to 2015-12-31