



APPLICATION FOR REGISTRATION AS A REGISTERED SERVICE COMPANY

Public Service Commission
SFN 51277 (2/2014)



TYPE OR PRINT - AN INCOMPLETE OR ILLEGIBLE APPLICATION WILL BE REJECTED

Name of Company <i>RPS of Minnesota</i>	Email Address <i>rshoutz@rdspos.com</i>	Application Date <i>12-11-15</i>	
Mailing Address <i>6566 Edendale Blvd</i>	City <i>Eden Prairie</i>	State <i>MN</i>	Zip Code <i>55346</i>
Telephone Number <i>952 934 4002</i>	Cell Phone Number <i>763 218 8964</i>	Fax Number <i>952 934 4830</i>	

Select below all device types your company will certify:

Scales (include maximum capacity, if applicable)	Liquid (include maximum flow rate, if applicable)
<input type="checkbox"/> 1. Rail <input type="checkbox"/> 2. Truck <input type="checkbox"/> 3. Livestock <input type="checkbox"/> 4. Hopper: Max. Capacity: _____ <input type="checkbox"/> 5. Belt <input type="checkbox"/> 6. Over 30 lbs.: Max. Capacity: _____ <input checked="" type="checkbox"/> 7. 30 lbs. or less <input type="checkbox"/> 8. Class II (indicate on your calibration report which weight kit is Class II certified) <input type="checkbox"/> 9. Other: Please List:	<input type="checkbox"/> 1. Retail Fuel (less than 20 gal. per minute) <input type="checkbox"/> 2. High Flow Retail Fuel (20 gal. per minute or greater) <input type="checkbox"/> 3. Vehicle Tank: Max. Flow Rate: _____ <input type="checkbox"/> 4. Stationary Bulk (fuel or oil): Max. Flow Rate: _____ <input type="checkbox"/> 5. LPG <input type="checkbox"/> 6. Stationary LPG <input type="checkbox"/> 7. Fertilizer: Max. Flow Rate: _____ <input type="checkbox"/> 8. Chemical <input type="checkbox"/> 9. Anhydrous <input type="checkbox"/> 10. Loading Rack <input type="checkbox"/> 11. Other: Please List:

List below all persons employed by your company as a North Dakota Registered Service Person and the device types they are registered to certify (attach a separate sheet to list additional employees):

Permit No.	Employee	Device Types Registered to Certify (list using device type numbers from above)
<i>e.g. 1001</i>	<i>e.g. John Doe</i>	<i>e.g. Scales - 2, 3, 6, 8; e.g. Liquid - 1, 2, 6</i>
<i>1245</i>	<i>Jason Hense</i>	
<i>1261</i>	<i>adam ostasz</i>	



List below all field standards (attach current calibration reports):

3016 K.I. # 333640	
# 33807	

Additional Application Items (initial where appropriate):

Standardized Test Report	<input checked="" type="checkbox"/> Copy enclosed <input type="checkbox"/> No change in report filed previously
Tested and Approved Sticker	<input checked="" type="checkbox"/> Copy enclosed <input type="checkbox"/> No change in sticker filed previously
Photocopy of Crimped Lead Wire Seal	<input checked="" type="checkbox"/> Copy enclosed <input type="checkbox"/> No change in crimped lead wire seal filed previously

Public Company Listing:

Include my company information on your registered service company list for public contact.
 Yes No

I am Randy Shoutz, and have authority to represent this company. By signing this application, I declare that I have examined this form and accompanying documentation, and to the best of my knowledge and belief, the facts stated and documentation provided is true, correct, and complete.

Randy Shoutz
Signature

Send Completed Application and Related Documents To:

Public Service Commission
600 E Boulevard Ave Dept 408
Bismarck ND 58505-0480
Telephone: (701) 328-2400
Fax: (701) 328-2410



Tested & Approved

RDS of Minnesota


Ph. 952-934-4002

1 2 3 4 5 6 7 8 9 10 11 12

10 11 12 13 14 15 16 17 18

RECEIVED
DEC 18 2015
ND Public Service
Commission

RPS mn Seal

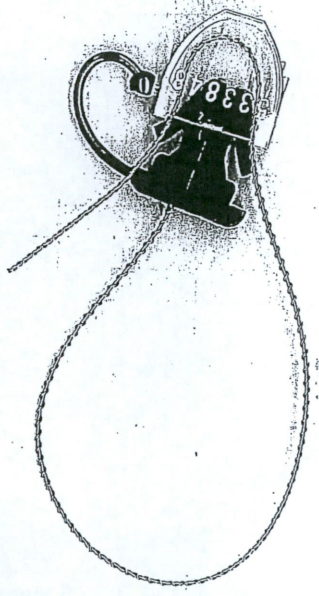

Receipt Date: January 15, 2015 & February 10, 2015
Test Date: February 17, 2015
Report Date: February 17, 2015

State Test No.: 333640
Set Serial No.: NONE
Barcode: 200424

Calibration Report

RETAIL DATA SYSTEMS
6566 EDENVALE BLVD
EDENPRAIRIE, MN 55346

Contact: RANDY SHOUTZ
Phone: 952-934-4001
PO Number: NONE
SOP: 12
Technician ID: 09

Item(s) Submitted: 30 lb kit w/decimals
Manufacturer: Rice Lake
ASTM E617 Type: I & II
Equipment ID#: None
Condition: Good
Temperature: 19.3°C
Pressure: 737.7 mmHg
Relative Humidity: 53. %



Nominal Value	Serial No.	Correction (mg)		NIST HB105-1 Class		Unc. (mg) (k=2)
		As Found	As Left	As Found	As Left	
10 lb		44	44	F	F	15.
10 lb		126	126	F	F	15.
5 lb		67	67	F	F	10.
2 lb		36	36	F	F	6.
2 lb		29	29	F	F	6.
1 lb		17	17	F	F	6.
0.5 lb		1	1	F	F	6.
0.2 lb		5.52	5.52	F	F	0.07
0.2 lb		5.62	5.62	F	F	0.07
0.1 lb		3.69	3.69	F	F	0.07
0.05 lb		2.42	2.42	F	F	0.07
0.02 lb		0.58	0.58	F	F	0.07
0.02 lb		0.77	0.77	F	F	0.07
0.005 lb		0.69	0.69	F	F	0.07
0.002 lb		0.33	0.33	F	F	0.07
0.002 lb		0.54	0.54	F	F	0.07
0.001 lb		0.45	0.45	F	F	0.07

When used as a set these weights meet NIST HB 105-1 class F tolerances.

The resulting tolerance class of the weight is determined by combining the correction of the weight and the uncertainty of the measurement. The corrections given above correlate to a conventional mass scale versus 8.0 g/cm³ density and an air density of 1.2 mg/cm³. The items listed above have been compared to the Standards of the State of Minnesota which are currently in control. These standards are traceable to the SI through NIST. Calibration processes were monitored and found to be in control. Uncertainty calculations conform to NIST Technical Note 1297. Results apply to items identified in this report only.

Heidi Jones
Heidi Jones
Laboratory Administrator

Reviewed by:
Mark Nicollet
Mark Nicollet
Quality Manager

Receipt Date: February 10, 2015
 Test Date: February 17, 2015
 Report Date: February 17, 2015

State Test No.: 333807
 Set Serial No.: NONE
 Barcode: 018774

Calibration Report

RETAIL DATA SYSTEMS
 6566 EDENVALE BLVD
 EDEN PRAIRIE, MN 55346
 Contact: RANDY SHOUTZ
 Phone: 952-934-4001
 PO Number: NONE
 SOP: 12
 Technician ID: 09

Item(s) Submitted: 30 lb kit w/fractions
 Manufacturer: Rice Lake
 ASTM E617 Type: I & II
 Equipment ID#: None
 Condition: Good
 Temperature: 19.3°C
 Pressure: 737.7 mmHg
 Relative Humidity: 53. %



Nominal Value	Serial No.	Correction (mg)		NIST HB105-1 Class		Unc. (mg) (k=2)
		As Found	As Left	As Found	As Left	
10 lb		117	117	F	F	15.
10 lb		128	128	F	F	15.
5 lb		21	21	F	F	10.
1 lb		20	20	F	F	6.
1 lb		12	12	F	F	6.
1 lb		19	19	F	F	6.
1 lb		23	23	F	F	6.
1 lb		20	20	F	F	6.
4 oz		6.93	6.93	F	F	0.07
4 oz		9.81	9.81	F	F	0.07
4 oz		5.26	5.26	F	F	0.07
1 oz		2.13	2.13	F	F	0.07
1 oz		2.37	2.37	F	F	0.07
1 oz		2.70	2.70	F	F	0.07
1/2 oz		0.88	0.88	F	F	0.07
1/2 oz		1.55	1.55	F	F	0.07
1/4 oz		0.04	0.04	F	F	0.07
1/4 oz		0.53	0.53	F	F	0.07

When used as a set these weights meet NIST HB 105-1 class F tolerances.

The resulting tolerance class of the weight is determined by combining the correction of the weight and the uncertainty of the measurement. The corrections given above correlate to a conventional mass scale versus 8.0 g/cm³ density and an air density of 1.2 mg/cm³. The items listed above have been compared to the Standards of the State of Minnesota which are currently in control. These standards are traceable to the SI through NIST. Calibration processes were monitored and found to be in control. Uncertainty calculations conform to NIST Technical Note-1297. Results apply to items identified in this report only.

Heidi Jones
Heidi Jones
 Laboratory Administrator

Reviewed by:
 Mark Nicollet
Mark Nicollet
 Quality Manager

