

Exam Date:04/20/2010

Wilton Farmers Union Elevator Co.


Page: 1

Examiner: 1

Box 188
 Wilton , ND
 County:
 Phone: 701-734-6780
 CCC Number:

Location/Container Numbers/Comments	Section	Capacity
PART A - ADDITIONAL SPACE TO BE INCLUDED UNDER LICENSE		
305	A	54,901
306	A	54,901
	Total:	109,802
PART B - SPACE TO BE DELETED UNDER LICENSE		
300-ground	G	99,920
500-ground	A	99,920
	Total:	199,840
PART C - ALL SPACE TO BE INCLUDED UNDER LICENSE		
	A	755,000
	C	146,000
	D	487,000
	E	45,000
	G	226,000
	Total:	1,659,000
PART D - TOTAL CAPACITY BY FUNCTIONAL UNIT		
Regan 751	D E	532,000
Washburn 846	G	226,000
Wilton 59	A C	901,000
	Total:	1,659,000

WILTON FARMERS UNION ELEVATOR CO
 WILTON ND
 SECTION A




DMV&W RAIL

040	038	036	034	032
039	037	035	033	031


SECTION A

025	027	015	014	013	011	09
24A	028	018	016	010	03	06
					07	1
						8
026	021	020			04	05
		22	23	24	x	
					x	
					cb	
					2	

driveway



SECTION A

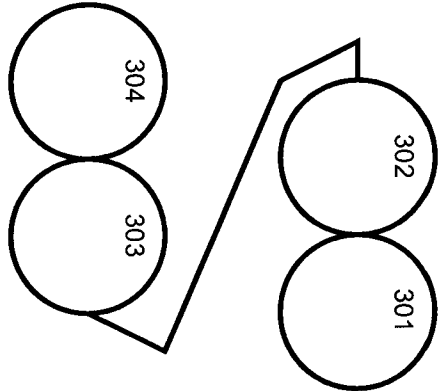


WILTON FARMERS UNION ELEVATOR CO

WILTON ND

REGAN LOCATION

SECTION D & E

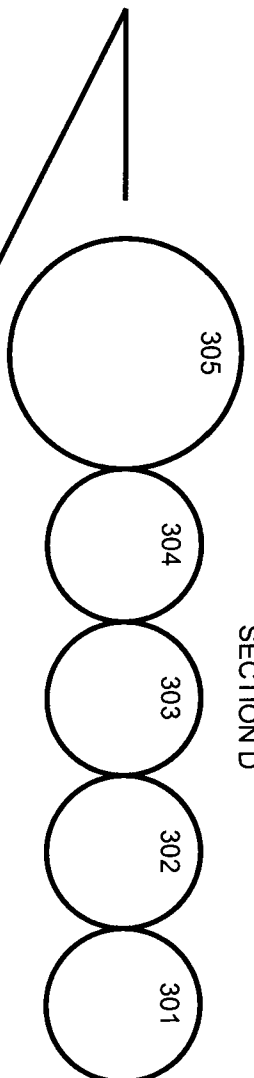


017	019	020	018
011	013	014	012
07	005	010	08
03	XXX	04	06
	XXX	01	

204	203	202
205	207	201
206	208	209

MAIN ELEV.
SECTION

warehouse




Section E

Section E



SECTION D

WILTON FARMERS UNION ELEVATOR CO
 WILTON ND
 WASHBURN LOCATION
 SECTION G

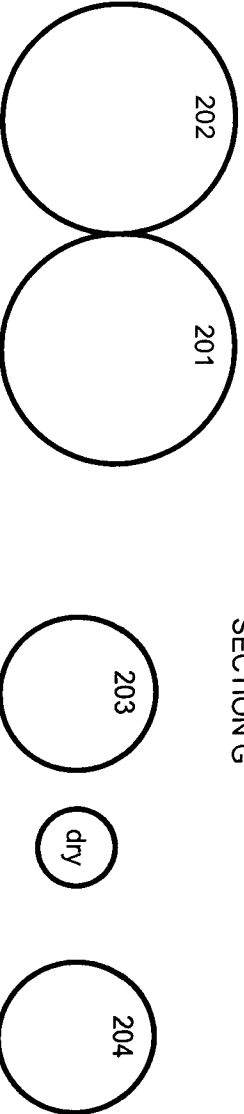

cp railroad spur

08	010	013	015	019	112	114	111	109
06	09	18	016	019	115	104	106	107
	014	2						
04	03	025	21	20	108	xx xx	102	105
			24	23				
					TB			

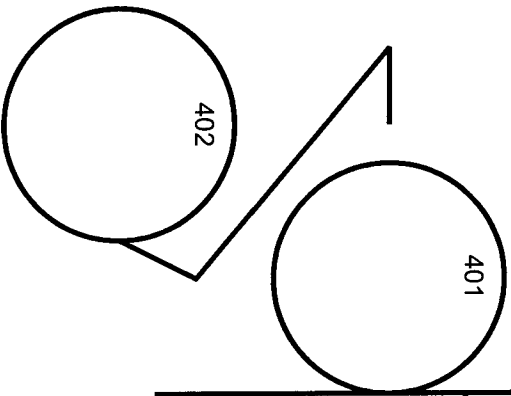


SECTION G

SECTION G

WILTON FARMERS UNION ELEVATOR CO
 WILTON ND
 SECTION C

cp rail


106	107	108	109	015	014	013	012	011	010
105	104	103	102	017	016	020	09	07	08
			101						
				023	023A	21	02	06	04
						X X			



SECTION C

driveway

SECTION C

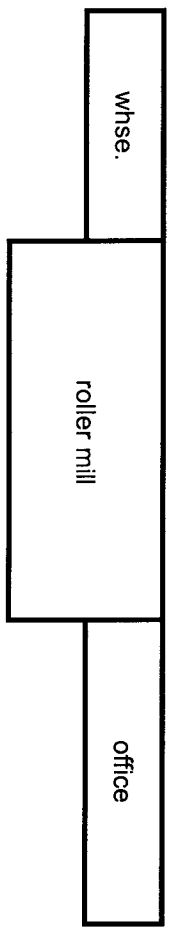

Exam Date: 04/20/2010

Wilton Farmers Union Elevator Co.

Page: 1

Examiner: 1

Box 188
Wilton, ND

County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Regan

Section: D

D	001	Square	work floor		0.000	8.000	6.800	56.00	0.00	0.00	56.000	0.000	56.0	43.7	3.50	2,533
D	002	Square	work floor		0.000	8.000	6.800	56.00	0.00	0.00	56.000	0.000	56.0	43.7	3.50	2,533
D	003	Square	work floor		0.000	8.000	7.900	56.00	0.00	0.00	56.000	0.000	56.0	50.8	4.50	2,973
D	004	Square	work floor		0.000	8.000	7.900	56.00	0.00	0.00	56.000	0.000	56.0	50.8	4.50	2,973
D	005	Square	work floor		0.000	8.000	7.900	56.00	0.00	0.00	56.000	0.000	56.0	50.8	4.50	2,973
D	006	Square	work floor		0.000	8.000	7.900	56.00	0.00	0.00	56.000	0.000	56.0	50.8	4.50	2,973
D	008 T	Square	work floor		0.000	8.600	16.10	58.00	0.00	0.00	58.000	0.000	58.0	111.3	6.20	6,855
D	008B	Square	work floor T58'		0.000	7.200	14.90	17.00	0.00	0.00	17.000	0.000	17.0	86.2	5.80	1,550
D	009	Square	work floor		0.000	5.800	7.900	53.00	0.00	0.00	53.000	0.000	53.0	36.8	3.00	2,009
D	010	Square	work floor		0.000	12.00	7.900	56.00	0.00	0.00	56.000	0.000	56.0	76.2	5.50	4,502
D	011	Square	work floor		0.000	5.800	6.800	56.00	0.00	0.00	56.000	0.000	56.0	31.7	2.50	1,819
D	012 T	Square	work floor		0.000	8.600	16.10	58.00	0.00	0.00	58.000	0.000	58.0	111.3	6.20	6,855
D	012B	Square	work floor T58'		0.000	7.200	14.90	17.00	0.00	0.00	17.000	0.000	17.0	86.2	5.80	1,550
D	013	Irregular	work floor less 7 bpf for		40.000	7.054	7.054	56.00	0.00	0.00	56.000	0.000	56.0	40.0	3.00	2,307
D	014	Square	work floor		0.000	8.600	2.000	56.00	0.00	0.00	56.000	0.000	56.0	13.8	2.00	788
D	016	Irregular	work floor less 7.0 bpf for		40.000	7.054	7.054	56.00	0.00	0.00	56.000	0.000	56.0	40.0	3.00	2,307
D	017 T	Square	work floor		0.000	8.600	16.10	58.00	0.00	0.00	58.000	0.000	58.0	111.3	6.20	6,855
D	017B	Square	work floor T58'		0.000	7.200	14.90	17.00	0.00	0.00	17.000	0.000	17.0	86.2	5.80	1,550
D	018	Square	work floor		0.000	5.800	10.70	56.00	0.00	0.00	56.000	0.000	56.0	49.9	4.20	2,911
D	019	Square	work floor		0.000	5.800	6.800	56.00	0.00	0.00	56.000	0.000	56.0	31.7	2.50	1,819
D	020	Square	work floor		0.000	5.800	10.70	56.00	0.00	0.00	56.000	0.000	56.0	49.9	4.20	2,911

Exam Date:04/20/2010

Wilton Farmers Union Elevator Co.

Examiner: 1

Box 188
Wilton, ND
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak Capac.	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	---------------------	------------------	------------------	------------	---------------------------

Facility: Regan

Section: D

D	021		Square	work floor	0.000	3.700	5.000	46.00	0.00	0.00	46.000	0.000	46.0	14.9	2.00	699
D	022		Square	work floor	0.000	3.700	5.000	46.00	0.00	0.00	46.000	0.000	46.0	14.9	2.00	699
D	023		Square	work floor	0.000	8.600	3.000	56.00	0.00	0.00	56.000	0.000	56.0	20.7	2.00	1,182
D	024 T		Square	work floor	0.000	8.600	16.10	58.00	0.00	0.00	58.000	0.000	58.0	111.3	6.20	6,855
D	024B		Square	work floor T58'	0.000	7.200	14.90	17.00	0.00	0.00	17.000	0.000	17.0	86.2	5.80	1,550
D	025		Square	work floor	0.000	3.700	5.000	46.00	0.00	0.00	46.000	0.000	46.0	14.9	2.00	699
D	026		Square	work floor	0.000	8.000	7.900	56.00	0.00	0.00	56.000	0.000	56.0	50.8	4.50	2,973
D	027		Square	work floor	0.000	8.000	7.900	56.00	0.00	0.00	56.000	0.000	56.0	50.8	4.50	2,973
D	028		Square	work floor	0.000	8.000	7.900	56.00	0.00	0.00	56.000	0.000	56.0	50.8	4.50	2,973
D	029		Square	work floor	0.000	8.000	7.900	56.00	0.00	0.00	56.000	0.000	56.0	50.8	4.50	2,973
D	030		Square	work floor	0.000	8.000	6.800	56.00	0.00	0.00	56.000	0.000	56.0	43.7	3.50	2,533
D	031		Square	work floor	0.000	5.800	6.800	56.00	0.00	0.00	56.000	0.000	56.0	31.7	2.50	1,819
D	032		Square	work floor	0.000	8.000	6.800	56.00	0.00	0.00	56.000	0.000	56.0	43.7	3.50	2,533
D	033		Square	work floor	0.000	5.800	6.800	56.00	0.00	0.00	56.000	0.000	56.0	31.7	2.50	1,819
D	101 T		Square	work floor	0.000	3.600	14.40	26.00	0.00	0.00	26.000	0.000	26.0	41.7	3.50	1,122
D	101 M		Square	work floor T26'	0.000	14.80	14.40	40.00	0.00	0.00	40.000	0.000	40.0	171.3	7.00	7,332
D	101B		Square	work floor T26' M40'	0.000	12.40	14.40	9.000	0.00	0.00	9.000	0.000	9.0	143.5	6.80	1,380
D	102 T		Square	work floor	0.000	14.80	14.40	66.00	0.00	0.00	66.000	0.000	66.0	171.3	7.00	12,097
D	102B		Square	work floor T66'	0.000	12.40	14.40	9.000	0.00	0.00	9.000	0.000	9.0	143.5	6.80	1,380
D	103 T		Square	work floor	0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D	103B		Square	work floor T66'	0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399

Exam Date: 04/20/2010
 Examiner: 1

Wilton Farmers Union Elevator Co.
 Box 188
 Wilton, ND
 County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Regan

Section: D

D		104 T	Square	work floor	0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D		104B	Square	work floor T66'	0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399
D		105 T	Square	work floor	0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D		105B	Square	work floor	0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399
D		106 T	Square	work floor	0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D		106B	Square	work floor T66'	0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399
D		107 T	Square	work floor	0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D		107B	Square	work floor T66'	0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399
D		108 T	Square	work floor	0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D		108B	Square	work floor T66'	0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399
D		109 T	Square	work floor	0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D		109B	Square	work floor T66'	0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399
D		110 T	Square	work floor	0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D		110B	Square	work floor T66'	0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399
D		111 T	Square	work floor	0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D		111B	Square	work floor T66'	0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399
D		112 T	Square	work floor	0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D		112B	Square	work floor T66'	0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399
D		113 T	Square	work floor	0.000	14.80	14.40	66.00	0.00	0.00	66.000	0.000	66.0	171.3	7.00	12,097
D		113B	Square	work floor T66'	0.000	12.40	14.40	9.000	0.00	0.00	9.000	0.000	9.0	143.5	6.80	1,380
D		114 T	Square	work floor	0.000	14.80	14.40	66.00	0.00	0.00	66.000	0.000	66.0	171.3	7.00	12,097

Exam Date: 04/20/2010
 Examiner: 1

Wilton Farmers Union Elevator Co.
 Box 188
 Wilton, ND
 County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Regan

Section: D

D		114B	Square	work floor T66'	0.000	12.40	14.40	9.000	0.00	0.00	9.000	0.000	9.0	143.5	6.80	1,380
D		116	Square	work floor	0.000	10.80	4.800	25.00	0.00	0.00	25.000	0.000	25.0	41.7	3.50	1,080
D		117	Square	work floor	0.000	10.80	4.400	25.00	0.00	0.00	25.000	0.000	25.0	38.2	3.00	984
D		118	Square	work floor	0.000	10.80	4.400	25.00	0.00	0.00	25.000	0.000	25.0	38.2	3.00	984
D		201	Square	work floor	0.000	6.000	11.30	46.50	0.00	0.00	46.500	0.000	46.5	54.5	4.50	2,648
D		202	Square	work floor	0.000	11.50	11.30	56.00	0.00	0.00	56.000	0.000	56.0	104.5	6.00	6,203
D		203	Square	work floor	0.000	11.50	11.70	56.00	0.00	0.00	56.000	0.000	56.0	108.2	6.20	6,435
D		204	Square	work floor	0.000	11.50	11.30	56.00	0.00	0.00	56.000	0.000	56.0	104.5	6.00	6,203
D		205	Square	work floor	0.000	6.000	11.30	46.50	0.00	0.00	46.500	0.000	46.5	54.5	4.50	2,648
D		206	Square	work floor	0.000	11.50	11.30	56.00	0.00	0.00	56.000	0.000	56.0	104.5	6.00	6,203
D		207	Square	work floor	0.000	6.000	11.70	46.50	0.00	0.00	46.500	0.000	46.5	56.4	4.80	2,749
D		208	Square	work floor	0.000	11.50	11.70	56.00	0.00	0.00	56.000	0.000	56.0	108.2	6.20	6,435
D		209	Square	work floor	0.000	11.50	11.30	56.00	0.00	0.00	56.000	0.000	56.0	104.5	6.00	6,203
D		301	Peaked	top of sidewall	30.000	0.000	0.000	46.00	0.00	0.00	46.000	1.800	47.8	568.2	9.00	29,604
D		302	Peaked	top of sidewall	30.000	0.000	0.000	46.00	0.00	0.00	46.000	1.800	47.8	568.2	9.00	29,604
D		303	Peaked	top of sidewall	30.000	0.000	0.000	46.00	0.00	0.00	46.000	1.800	47.8	568.2	9.00	29,604
D		304	Peaked	top of sidewall	30.000	0.000	0.000	46.00	0.00	0.00	46.000	1.800	47.8	568.2	9.00	29,604
D		305	Peaked	top of sidewall	33.000	0.000	0.000	46.00	0.00	0.00	46.000	2.000	48.0	687.5	9.50	36,135

Bin count: 81

Facility: Regan Section: D Total: 486,067

To Even: 487,000

Exam Date:04/20/2010
 Examiner: 1

Wilton Farmers Union Elevator Co.
 Box 188
 Wilton, ND
 County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg).	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Regan

Section: E

E		001	Irregular	work floor	14.500	4.247	4.247	15.00	0.00	0.00	15.000	0.000	15.0	14.5	2.00	222
E		003	Irregular	work floor	68.100	9.204	9.204	58.00	0.00	0.00	58.000	0.000	58.0	68.1	5.20	4,155
E		004 T	Irregular	work floor	21.700	5.196	5.196	15.00	0.00	0.00	15.000	0.000	15.0	21.7	2.00	333
E		004 B	Irregular	work floor--= top 15'	39.800	7.036	7.036	25.00	0.00	0.00	25.000	0.000	25.0	39.8	3.00	1,025
E		005	Irregular	work floor	38.600	6.930	6.930	41.00	0.00	0.00	41.000	0.000	41.0	38.6	3.00	1,630
E		006	Irregular	work floor	67.200	9.143	9.143	58.00	0.00	0.00	58.000	0.000	58.0	67.2	5.20	4,101
E		007	Irregular	work floor	46.400	7.597	7.597	58.00	0.00	0.00	58.000	0.000	58.0	46.4	4.00	2,799
E		008	Irregular	work floor	45.800	7.548	7.548	58.00	0.00	0.00	58.000	0.000	58.0	45.8	4.00	2,762
E		010	Irregular	work floor	38.600	6.930	6.930	41.00	0.00	0.00	41.000	0.000	41.0	38.6	3.00	1,630
E		011	Irregular	work floor	45.200	7.499	7.499	58.00	0.00	0.00	58.000	0.000	58.0	45.2	4.00	2,727
E		012	Irregular	work floor	44.600	7.449	7.449	58.00	0.00	0.00	58.000	0.000	58.0	44.6	3.50	2,678
E		013	Irregular	work floor	37.600	6.839	6.839	39.00	0.00	0.00	39.000	0.000	39.0	37.6	3.00	1,510
E		014	Irregular	work floor	37.600	6.839	6.839	39.00	0.00	0.00	39.000	0.000	39.0	37.6	3.00	1,510
E		017	Irregular	work floor	45.200	7.499	7.499	58.00	0.00	0.00	58.000	0.000	58.0	45.2	4.00	2,727
E		018	Irregular	work floor	44.600	7.449	7.449	58.00	0.00	0.00	58.000	0.000	58.0	44.6	3.50	2,678
E		019	Irregular	work floor	37.600	6.839	6.839	39.00	0.00	0.00	39.000	0.000	39.0	37.6	3.00	1,510
E		020	Irregular	work floor	37.600	6.839	6.839	39.00	0.00	0.00	39.000	0.000	39.0	37.6	3.00	1,510
E		201	Peaked	top of sidewall	21.000	0.000	0.000	29.00	0.00	0.00	29.000	1.300	30.3	278.4	6.80	9,010

Bin count: 18

Facility: Regan Section: E Total:

44,517

To Even: 45,000

Exam Date:04/20/2010

Wilton Farmers Union Elevator Co.

Page: 6

Examiner: 1

Box 188
Wilton, ND

County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Washburn

Section: G

G		000TB	Square	work floor	0.000	4.900	8.200	10.00	0.00	0.00	10.000	0.000	10.0	32.3	2.50	331
G		002	Square	work floor	0.000	4.600	7.000	50.00	0.00	0.00	50.000	0.000	50.0	25.9	2.50	1,327
G		003	Square	work floor	0.000	9.300	3.400	48.00	0.00	0.00	48.000	0.000	48.0	25.4	2.50	1,249
G		004	Square	work floor	0.000	9.300	11.20	66.00	0.00	0.00	66.000	0.000	66.0	83.7	5.80	5,844
G		005	Square	work floor	0.000	10.00	5.700	49.00	0.00	0.00	49.000	0.000	49.0	45.8	4.00	2,334
G		006 T	Square	work floor	0.000	10.00	5.100	49.00	0.00	0.00	49.000	0.000	49.0	41.0	3.00	2,069
G		006B	Square	work floor T49'	0.000	10.00	11.20	17.00	0.00	0.00	17.000	0.000	17.0	90.0	5.80	1,619
G		008	Square	work floor	0.000	9.400	11.20	66.00	0.00	0.00	66.000	0.000	66.0	84.6	5.80	5,908
G		009 T	Square	work floor	0.000	5.100	6.700	12.00	0.00	0.00	12.000	0.000	12.0	27.5	2.50	338
G		009B	Square	work floor T12'	0.000	5.100	6.700	38.00	0.00	0.00	38.000	0.000	38.0	27.5	2.50	1,071
G		010	Square	work floor	0.000	9.400	6.700	49.00	0.00	0.00	49.000	0.000	49.0	50.6	4.50	2,591
G		013	Square	work floor	0.000	9.400	7.000	49.00	0.00	0.00	49.000	0.000	49.0	52.9	4.50	2,709
G		014	Square	work floor	0.000	4.600	6.700	50.00	0.00	0.00	50.000	0.000	50.0	24.8	2.50	1,271
G		015	Square	work floor	0.000	9.400	11.20	66.00	0.00	0.00	66.000	0.000	66.0	84.6	5.80	5,908
G		016	Square	work floor	0.000	10.00	5.700	49.00	0.00	0.00	49.000	0.000	49.0	45.8	4.00	2,334
G		018 T	Irregular	work floor	5.300	2.568	2.568	12.00	0.00	0.00	12.000	0.000	12.0	5.3	2.00	65
G		018B	Square	work floor T12'	0.000	5.100	7.000	38.00	0.00	0.00	38.000	0.000	38.0	28.7	2.50	1,118
G		019	Square	work floor	0.000	10.00	5.100	49.00	0.00	0.00	49.000	0.000	49.0	41.0	3.00	2,069
G		020	Square	work floor	0.000	4.700	5.100	48.00	0.00	0.00	48.000	0.000	48.0	19.3	2.00	945
G		021 T	Square	work floor	0.000	4.700	5.700	48.00	0.00	0.00	48.000	0.000	48.0	21.5	2.00	1,053
G		021B	Square	work floor T48'	0.000	9.300	11.20	18.00	0.00	0.00	18.000	0.000	18.0	83.7	5.80	1,594

Exam Date:04/20/2010

Wilton Farmers Union Elevator Co.

Box 188

Examiner: 1

Wilton, ND

County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Dec. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Washburn

Section: G

G		023	Square	work floor	0.000	4.300	5.100	48.00	0.00	0.00	48.000	0.000	48.0	17.6	2.00	862
G		024	Square	work floor	0.000	4.300	5.700	48.00	0.00	0.00	48.000	0.000	48.0	19.7	2.00	965
G		025	Square	work floor	0.000	9.300	3.400	48.00	0.00	0.00	48.000	0.000	48.0	25.4	2.50	1,249
G		102	Square	work floor	0.000	9.500	5.000	25.00	0.00	0.00	25.000	0.000	25.0	38.2	3.00	984
G		104	Square	work floor	0.000	9.700	5.500	28.00	0.00	0.00	28.000	0.000	28.0	42.9	3.50	1,243
G		105	Square	work floor	0.000	9.500	8.200	42.00	0.00	0.00	42.000	0.000	42.0	62.6	5.00	2,760
G		106	Square	work floor	0.000	9.700	5.500	28.00	0.00	0.00	28.000	0.000	28.0	42.9	3.50	1,243
G		107	Square	work floor	0.000	9.700	8.200	42.00	0.00	0.00	42.000	0.000	42.0	63.9	5.00	2,818
G		108 T	Square	work floor	0.000	4.500	8.200	10.00	0.00	0.00	10.000	0.000	10.0	29.7	2.50	304
G		108B	Square	work floor T10'	0.000	9.500	8.200	32.00	0.00	0.00	32.000	0.000	32.0	62.6	5.00	2,103
G		109	Square	work floor	0.000	9.400	8.200	42.00	0.00	0.00	42.000	0.000	42.0	62.0	4.80	2,729
G		111	Square	work floor	0.000	9.400	5.500	25.00	0.00	0.00	25.000	0.000	25.0	41.6	3.50	1,076
G		112	Square	work floor	0.000	9.400	8.200	42.00	0.00	0.00	42.000	0.000	42.0	62.0	4.80	2,729
G		114	Square	work floor	0.000	9.400	5.500	25.00	0.00	0.00	25.000	0.000	25.0	41.6	3.50	1,076
G		115	Square	work floor	0.000	9.700	8.200	42.00	0.00	0.00	42.000	0.000	42.0	63.9	5.00	2,818
G		201	Peaked	top of sidewall	30.000	0.000	0.000	49.50	0.00	0.00	49.500	1.800	51.3	568.2	9.00	31,772
G		202	Peaked	top of sidewall	30.000	0.000	0.000	49.50	0.00	0.00	49.500	1.800	51.3	568.2	9.00	31,772
G		203	Peaked	top of sidewall	13.500	0.000	0.000	23.00	0.00	0.00	23.000	0.800	23.8	115.1	5.20	2,881
G		204	Peaked	top of sidewall	30.000	0.000	0.000	23.00	0.00	0.00	23.000	1.800	24.8	568.2	9.00	15,359
G		401	Peaked	top of sidewall	30.000	0.000	0.000	58.50	0.00	0.00	58.500	1.800	60.3	568.2	9.00	37,346
G		402	Peaked	top of sidewall	30.000	0.000	0.000	58.50	0.00	0.00	58.500	1.800	60.3	568.2	9.00	37,346

Client ID: 128

NDPSC Bin Capacity Chart

04/21/2010 02:26:59 PM

Exam Date:04/20/2010

Wilton Farmers Union Elevator Co.

Page: 8

Examiner: 1

Box 188
Wilton, ND

County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg).	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak Capac.	Depth	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	-------------------------------	--------	-------	--------------	----------------------	----------------------	--------------------	------------------------------	-------	------------------------	---------------	------------------------------

Bin count: 42

Facility: Washburn Section: G Total: 225,182

To Even: 226,000

Exam Date:04/20/2010

Wilton Farmers Union Elevator Co.

Page: 9

Examiner: 1

Box 188
Wilton, ND

County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Wilton

Section: A

A		000CB	Square	work floor	0.000	2.800	4.000	54.00	0.00	0.00	54.000	0.000	54.0	9.0	2.00	496
A		001	Square	work floor	0.000	3.900	3.000	53.00	0.00	0.00	53.000	0.000	53.0	9.4	2.00	508
A		002	Square	work floor	0.000	8.000	4.000	54.00	0.00	0.00	54.000	0.000	54.0	25.7	2.50	1,423
A		003	Square	work floor	0.000	12.00	5.200	56.00	0.00	0.00	56.000	0.000	56.0	50.2	4.50	2,937
A		004 T	Square	work floor	0.000	11.20	10.80	53.00	0.00	0.00	53.000	0.000	53.0	97.2	6.00	5,461
A		004B	Square	work floor T53'	0.000	10.40	10.20	20.00	0.00	0.00	20.000	0.000	20.0	85.3	5.80	1,805
A		005 T	Square	work floor	0.000	13.20	9.800	65.00	0.00	0.00	65.000	0.000	65.0	104.0	6.00	7,166
A		005B	Square	work floor T65'	0.000	14.00	9.600	8.000	0.00	0.00	8.000	0.000	8.0	108.0	6.20	918
A		006 T	Square	work floor	0.000	8.200	6.400	53.00	0.00	0.00	53.000	0.000	53.0	42.2	3.50	2,315
A		006B	Square	work floor T53'	0.000	8.200	9.800	10.00	0.00	0.00	10.000	0.000	10.0	64.6	5.00	678
A		007	Square	work floor	0.000	12.00	5.200	56.00	0.00	0.00	56.000	0.000	56.0	50.2	4.50	2,937
A		008	Square	work floor	0.000	3.900	3.000	53.00	0.00	0.00	53.000	0.000	53.0	9.4	2.00	508
A		009 T	Square	work floor	0.000	13.20	9.800	65.00	0.00	0.00	65.000	0.000	65.0	104.0	6.00	7,166
A		009B	Square	work floor T65'	0.000	14.00	9.600	8.000	0.00	0.00	8.000	0.000	8.0	108.0	6.20	918
A		010	Square	work floor	0.000	12.00	6.800	54.00	0.00	0.00	54.000	0.000	54.0	65.6	5.00	3,719
A		011 T	Square	work floor	0.000	11.20	10.80	53.00	0.00	0.00	53.000	0.000	53.0	97.2	6.00	5,461
A		011B	Square	work floor T53'	0.000	10.40	10.20	20.00	0.00	0.00	20.000	0.000	20.0	85.3	5.80	1,805
A		013 T	Square	work floor	0.000	2.500	6.800	22.00	0.00	0.00	22.000	0.000	22.0	13.7	2.00	307
A		013B	Square	work floor T22'	0.000	11.20	6.800	30.00	0.00	0.00	30.000	0.000	30.0	61.2	4.80	1,924
A		014	Square	work floor	0.000	11.20	6.800	52.00	0.00	0.00	52.000	0.000	52.0	61.2	4.80	3,335
A		015 T	Square	work floor	0.000	13.20	9.600	64.00	0.00	0.00	64.000	0.000	64.0	101.9	6.00	6,913

Exam Date:04/20/2010

Wilton Farmers Union Elevator Co.

Page: 10

Examiner: 1

Box 188
Wilton, ND

County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Wilton

Section: A

A	015B	Square	work floor T64	0.000	14.00	9.100	7.000	0.00	0.00	7.000	0.000	7.0	102.4	6.00	760
A	016	Square	work floor	0.000	12.00	6.800	54.00	0.00	0.00	54.000	0.000	54.0	65.6	5.00	3,719
A	018	Square	work floor	0.000	8.200	9.600	64.00	0.00	0.00	64.000	0.000	64.0	63.3	5.00	4,254
A	020 T	Square	work floor	0.000	7.200	9.600	54.00	0.00	0.00	54.000	0.000	54.0	55.6	4.80	3,146
A	020 M	Square	work floor T54'	0.000	13.20	9.600	10.00	0.00	0.00	10.000	0.000	10.0	101.9	6.00	1,080
A	020B	Square	work floor T54' M10	0.000	14.00	9.100	7.000	0.00	0.00	7.000	0.000	7.0	102.4	6.00	760
A	021 T	Square	work floor	0.000	13.20	9.600	64.00	0.00	0.00	64.000	0.000	64.0	101.9	6.00	6,913
A	021B	Square	work floor T64'	0.000	14.00	9.600	7.000	0.00	0.00	7.000	0.000	7.0	108.0	6.20	803
A	022	Square	work floor	0.000	5.600	4.600	54.00	0.00	0.00	54.000	0.000	54.0	20.7	2.00	1,140
A	023	Square	work floor	0.000	5.600	4.600	54.00	0.00	0.00	54.000	0.000	54.0	20.7	2.00	1,140
A	024	Square	work floor	0.000	11.20	4.000	52.00	0.00	0.00	52.000	0.000	52.0	36.0	3.00	1,928
A	024A	Square	work floor	0.000	8.200	9.600	64.00	0.00	0.00	64.000	0.000	64.0	63.3	5.00	4,254
A	025 T	Square	work floor	0.000	13.20	9.600	64.00	0.00	0.00	64.000	0.000	64.0	101.9	6.00	6,913
A	025B	Square	work floor T64'	0.000	14.00	9.500	7.000	0.00	0.00	7.000	0.000	7.0	106.9	6.20	794
A	026 T	Square	work floor	0.000	13.20	9.600	64.00	0.00	0.00	64.000	0.000	64.0	101.9	6.00	6,913
A	026B	Square	work floor T64'	0.000	14.00	9.500	7.000	0.00	0.00	7.000	0.000	7.0	106.9	6.20	794
A	027 T	Square	work floor	0.000	13.20	9.600	64.00	0.00	0.00	64.000	0.000	64.0	101.9	6.00	6,913
A	027B	Square	work floor T64'	0.000	14.00	9.600	7.000	0.00	0.00	7.000	0.000	7.0	108.0	6.20	803
A	028	Square	work floor	0.000	8.200	9.600	64.00	0.00	0.00	64.000	0.000	64.0	63.3	5.00	4,254
A	031 T	Square	work floor	0.000	17.20	15.40	61.00	0.00	0.00	61.000	0.000	61.0	212.9	7.00	13,896
A	031B	Square	work floor	0.000	15.00	15.40	9.000	0.00	0.00	9.000	0.000	9.0	185.7	7.00	1,788

Exam Date:04/20/2010

Wilton Farmers Union Elevator Co.

Examiner: 1

Box 188
Wilton, ND
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Wilton

Section: A

A		032 T	Square	work floor	0.000	17.20	15.40	61.00	0.00	0.00	61.000	0.000	61.0	212.9	7.00	13,896
A		032B	Square	work floor T6'1"	0.000	15.00	15.40	9.000	0.00	0.00	9.000	0.000	9.0	185.7	7.00	1,788
A		033 T	Square	work floor	0.000	17.20	15.50	61.00	0.00	0.00	61.000	0.000	61.0	214.3	7.00	13,987
A		033B	Square	work floor T6'1"	0.000	15.00	15.50	9.000	0.00	0.00	9.000	0.000	9.0	186.9	7.00	1,800
A		034 T	Square	work floor	0.000	17.20	15.50	61.00	0.00	0.00	61.000	0.000	61.0	214.3	7.00	13,987
A		034B	Square	work floor T6'1"	0.000	15.00	15.50	9.000	0.00	0.00	9.000	0.000	9.0	186.9	7.00	1,800
A		035 T	Square	work floor	0.000	17.20	15.60	61.00	0.00	0.00	61.000	0.000	61.0	215.7	7.00	14,079
A		035B	Square	work floor T6'1"	0.000	15.00	15.60	9.000	0.00	0.00	9.000	0.000	9.0	188.1	7.00	1,812
A		036 T	Square	work floor	0.000	17.20	15.60	61.00	0.00	0.00	61.000	0.000	61.0	215.7	7.00	14,079
A		036B	Square	work floor T6'1"	0.000	15.00	15.60	9.000	0.00	0.00	9.000	0.000	9.0	188.1	7.00	1,812
A		037 T	Square	work floor	0.000	17.20	15.50	61.00	0.00	0.00	61.000	0.000	61.0	214.3	7.00	13,987
A		037B	Square	work floor T6'1"	0.000	15.00	15.50	9.000	0.00	0.00	9.000	0.000	9.0	186.9	7.00	1,800
A		038 T	Square	work floor	0.000	17.20	15.50	61.00	0.00	0.00	61.000	0.000	61.0	214.3	7.00	13,987
A		038B	Square	work floor T6'1"	0.000	15.00	15.50	9.000	0.00	0.00	9.000	0.000	9.0	186.9	7.00	1,800
A		039 T	Square	work floor	0.000	17.20	15.40	61.00	0.00	0.00	61.000	0.000	61.0	212.9	7.00	13,896
A		039B	Square	work floor T6'1"	0.000	15.00	15.40	9.000	0.00	0.00	9.000	0.000	9.0	185.7	7.00	1,788
A		040 T	Square	work floor	0.000	17.20	15.40	61.00	0.00	0.00	61.000	0.000	61.0	212.9	7.00	13,896
A		040B	Square	work floor T6'1"	0.000	15.00	15.40	9.000	0.00	0.00	9.000	0.000	9.0	185.7	7.00	1,788
A		301	Peaked	top side wall	36.000	0.000	0.000	61.50	0.00	0.00	61.500	2.200	63.7	818.2	10.0	57,331
A		302	Peaked	top side wall	42.000	0.000	0.000	61.50	0.00	0.00	61.500	2.500	64.0	1113.7	10.0	78,405
A		303	Peaked	top side wall	48.000	0.000	0.000	61.30	0.00	0.00	61.300	3.400	64.7	1454.6	10.0	103,524

Exam Date:04/20/2010
 Examiner: 1

Wilton Farmers Union Elevator Co.
 Box 188
 Wilton, ND
 County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Det. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Wilton

A		304	Peaked	top side wall	54.000	0.000	0.000	61.30	0.00	0.00	61.300	3.800	65.1	1841.0	10.0	131,834
Added	A	305	Peaked	top side wall	36.000	0.000	0.000	58.75	0.00	0.00	58.750	2.200	61.0	818.2	10.0	54,901
Added	A	306	Peaked	top side wall	36.000	0.000	0.000	58.75	0.00	0.00	58.750	2.200	61.0	818.2	10.0	54,901

Bin count: **66** Facility: Wilton Section: A Total: **754,543**
 To Even: **755,000**

Section: C

C		002	Square	work floor	0.000	9.400	3.400	36.00	0.00	0.00	36.000	0.000	36.0	25.7	2.50	948
C		004 T	Square	work floor	0.000	9.400	3.000	36.00	0.00	0.00	36.000	0.000	36.0	22.7	2.00	833
C		004B	Square	work floor T36'	0.000	9.400	9.200	16.50	0.00	0.00	16.500	0.000	16.5	69.5	5.20	1,207
C		006	Square	work floor	0.000	9.400	5.800	36.00	0.00	0.00	36.000	0.000	36.0	43.8	3.50	1,632
C		007	Square	work floor	0.000	9.700	5.800	32.50	0.00	0.00	32.500	0.000	32.5	45.2	4.00	1,528
C		008	Square	top of cribbing	0.000	9.700	9.200	22.00	0.00	0.00	22.000	0.000	22.0	71.7	5.20	1,659
C		009	Square	top of cribbing	0.000	9.700	6.400	36.00	0.00	0.00	36.000	0.000	36.0	49.9	4.20	1,871
C		010 T	Square	top of cribbing	0.000	9.400	3.000	36.00	0.00	0.00	36.000	0.000	36.0	22.7	2.00	833
C		010B	Square	top of cribbing	0.000	9.400	9.200	16.50	0.00	0.00	16.500	0.000	16.5	69.5	5.20	1,207
C		011	Square	top of cribbing	0.000	9.400	5.800	36.00	0.00	0.00	36.000	0.000	36.0	43.8	3.50	1,632
C		012	Square	top of cribbing	0.000	9.400	6.400	35.00	0.00	0.00	35.000	0.000	35.0	48.4	4.20	1,765
C		013	Square	work floor	0.000	9.400	6.400	35.00	0.00	0.00	35.000	0.000	35.0	48.4	4.20	1,765
C		014	Square	work floor	0.000	9.400	5.800	36.00	0.00	0.00	36.000	0.000	36.0	43.8	3.50	1,632

Client ID: 128

NDPSC Bin Capacity Chart

04/21/2010 02:27:01 PM

Exam Date:04/20/2010

Wilton Farmers Union Elevator Co.

Page: 13

Examiner: 1

Box 188
Wilton, ND

County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak Capac.	Depth for	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	---------------------	-----------	------------------	------------	---------------------------

Facility: Wilton

Section: C

C	015 T	Square	top of cribbing		0.000	9.400	3.000	36.00	0.00	0.00	36.000	0.000	36.0	22.7	2.00	833
C	015B	Square	top of cribbing		0.000	9.400	9.200	16.50	0.00	0.00	16.500	0.000	16.5	69.5	5.20	1,207
C	016	Square	work floor		0.000	9.700	5.800	36.00	0.00	0.00	36.000	0.000	36.0	45.2	4.00	1,692
C	017 T	Square	top of cribbing		0.000	9.700	3.000	36.00	0.00	0.00	36.000	0.000	36.0	23.4	2.00	859
C	017B	Square	top of cribbing		0.000	9.700	9.200	16.50	0.00	0.00	16.500	0.000	16.5	71.7	5.20	1,245
C	020	Square	work floor		0.000	9.700	6.400	36.00	0.00	0.00	36.000	0.000	36.0	49.9	4.20	1,871
C	021	Square	work floor		0.000	4.500	3.400	36.00	0.00	0.00	36.000	0.000	36.0	12.3	2.00	452
C	023 A	Square	work floor		0.000	9.400	5.800	36.00	0.00	0.00	36.000	0.000	36.0	43.8	3.50	1,632
C	023 T	Square	top of cribbing		0.000	9.400	3.000	36.00	0.00	0.00	36.000	0.000	36.0	22.7	2.00	833
C	023B	Square	top of cribbing-top 36'		0.000	9.400	9.200	16.50	0.00	0.00	16.500	0.000	16.5	69.5	5.20	1,207
C	101	Square	catwalk		0.000	14.40	5.500	32.00	0.00	0.00	32.000	0.000	32.0	63.7	5.00	2,140
C	102	Square	catwalk		0.000	14.40	5.500	32.00	0.00	0.00	32.000	0.000	32.0	63.7	5.00	2,140
C	103 T	Square	catwalk		0.000	14.40	11.60	44.00	0.00	0.00	44.000	0.000	44.0	134.3	6.50	6,293
C	103B	Square	catwalk T44'		0.000	12.00	11.60	10.00	0.00	0.00	10.000	0.000	10.0	111.9	6.20	1,188
C	104 T	Square	catwalk		0.000	14.40	11.60	44.00	0.00	0.00	44.000	0.000	44.0	134.3	6.50	6,293
C	104B	Square	catwalk T44'		0.000	12.00	11.60	10.00	0.00	0.00	10.000	0.000	10.0	111.9	6.20	1,188
C	105 T	Square	catwalk		0.000	14.40	11.40	44.00	0.00	0.00	44.000	0.000	44.0	132.0	6.50	6,186
C	105B	Square	catwalk T44'		0.000	12.00	11.40	10.00	0.00	0.00	10.000	0.000	10.0	110.0	6.20	1,168
C	106 T	Square	catwalk		0.000	14.40	11.40	44.00	0.00	0.00	44.000	0.000	44.0	132.0	6.50	6,186
C	106B	Square	catwalk T44'		0.000	12.00	11.40	10.00	0.00	0.00	10.000	0.000	10.0	110.0	6.20	1,168
C	107 T	Square	catwalk		0.000	14.40	11.60	44.00	0.00	0.00	44.000	0.000	44.0	134.3	6.50	6,293

Exam Date: 04/20/2010 Wilton Farmers Union Elevator Co. Page: 14
 Examiner: 1 Box 188
Wilton, ND
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Dec. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Wilton

Section: C

C	107B		Square	catwalk T44'	0.000	12.00	11.60	10.00	0.00	0.00	10.000	0.000	10.0	111.9	6.20	1,188
C	108 T		Square	catwalk	0.000	14.40	11.60	44.00	0.00	0.00	44.000	0.000	44.0	134.3	6.50	6,293
C	108B		Square	catwalk T44'	0.000	12.00	11.60	10.00	0.00	0.00	10.000	0.000	10.0	111.9	6.20	1,188
C	109 T		Square	catwalk	0.000	14.40	11.40	44.00	0.00	0.00	44.000	0.000	44.0	132.0	6.50	6,186
C	109B		Square	catwalk T44'	0.000	12.00	11.40	10.00	0.00	0.00	10.000	0.000	10.0	110.0	6.20	1,168
C	201		Peaked	top of sidewall	30.000	0.000	0.000	46.00	0.00	0.00	46.000	1.800	47.8	568.2	9.00	29,604
C	202		Peaked	top of sidewall	30.000	0.000	0.000	46.00	0.00	0.00	46.000	1.800	47.8	568.2	9.00	29,604

Bin count: 41 Facility: Wilton Section: C Total: 145,817
To Even: 146,000

<p>Overall Licensed Bin Capacity for: Wilton Farmers Union Elevator Co. Bin count: 248</p>	<p>Licensed Capacity: (includes pack) 1,656,126 Bu.</p> <p>Licensed Capacity (to even): (includes pack and section totals are rounded up to next highest 1000) 1,659,000 Bu.</p>
---	--