



# APPLICATION FOR REGISTRATION AS A REGISTERED SERVICE COMPANY

Public Service Commission  
SFN 51277 (2/2014)



TYPE OR PRINT - AN INCOMPLETE OR ILLEGIBLE APPLICATION WILL BE REJECTED

Name of Company <i>Reiter Oil &amp; Gas Inc</i>	Email Address <i>acreiteresct.com</i>	Application Date	
Mailing Address <i>Po Box 2226</i>	City <i>Minot</i>	State <i>ND</i>	Zip Code <i>58702</i>
Telephone Number <i>701-839-6791</i>	Cell Phone Number	Fax Number <i>701-838-6460</i>	

Select below all device types your company will certify:

Scales (include maximum capacity, if applicable)	Liquid (include maximum flow rate, if applicable)
<input type="checkbox"/> 1. Rail <input type="checkbox"/> 2. Truck <input type="checkbox"/> 3. Livestock <input type="checkbox"/> 4. Hopper: Max. Capacity: _____ <input type="checkbox"/> 5. Belt <input type="checkbox"/> 6. Over 30 lbs.: Max. Capacity: _____ <input type="checkbox"/> 7. 30 lbs. or less <input type="checkbox"/> 8. Class II (indicate on your calibration report which weight kit is Class II certified) <input type="checkbox"/> 9. Other: Please List:	<input checked="" type="checkbox"/> 1. Retail Fuel (less than 20 gal. per minute) <input checked="" type="checkbox"/> 2. High Flow Retail Fuel (20 gal. per minute or greater) <input type="checkbox"/> 3. Vehicle Tank: Max. Flow Rate: _____ <input type="checkbox"/> 4. Stationary Bulk (fuel or oil): Max. Flow Rate: _____ <input type="checkbox"/> 5. LPG <input type="checkbox"/> 6. Stationary LPG <input type="checkbox"/> 7. Fertilizer: Max. Flow Rate: _____ <input type="checkbox"/> 8. Chemical <input type="checkbox"/> 9. Anhydrous <input type="checkbox"/> 10. Loading Rack <input type="checkbox"/> 11. Other: Please List:

List below all persons employed by your company as a North Dakota Registered Service Person and the device types they are registered to certify (attach a separate sheet to list additional employees):

Permit No.	Employee	Device Types Registered to Certify (list using device type numbers from above)
<i>e.g. 1001</i>	<i>e.g. John Doe</i>	<i>e.g. Scales - 2, 3, 6, 8; e.g. Liquid - 1, 2, 6</i>
<i>1358</i>	<i>Rick Reiter</i>	
<i>1357</i>	<i>Dale Reiter</i>	
<i>1356</i>	<i>Kevin Reiter</i>	

Continued on Page 2



List below all field standards (attach current calibration reports):

4- 5 Gal Test Cans	
1- 100 Gal Refind Prover	

Additional Application Items (initial where appropriate):

Standardized Test Report	<input type="checkbox"/> Copy enclosed
	<input checked="" type="checkbox"/> No change in report filed previously
Tested and Approved Sticker	<input type="checkbox"/> Copy enclosed
	<input checked="" type="checkbox"/> No change in sticker filed previously
Photocopy of Crimped Lead Wire Seal	<input type="checkbox"/> Copy enclosed
	<input checked="" type="checkbox"/> No change in crimped lead wire seal filed previously

Public Company Listing:

Include my company information on your registered service company list for public contact.  
 Yes     No

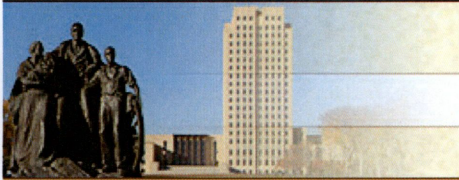
I am Kevin Reiter, and have authority to represent this company.  
By signing this application, I declare that I have examined this form and accompanying documentation, and to the best of my knowledge and belief, the facts stated and documentation provided is true, correct, and complete.

Kevin Reiter  
Signature

Send Completed Application and Related Documents To:

Public Service Commission  
600 E Boulevard Ave Dept 408  
Bismarck ND 58505-0480  
Telephone: (701) 328-2400  
Fax: (701) 328-2410

North Dakota

nd.gov Official Portal for  
North Dakota State GovernmentNorth Dakota  
LEGENDARY

## SECRETARY OF STATE NORTH DAKOTA


[Home](#) | [Business Records Search](#)

### REITER OIL & GAS INC.

#### Corporation Details

**System ID:** 16420200      **Phone:** (701) 839-6791  
**Type:** BUSINESS CORPORATION  
**Status:** Active & Good Standing  
**Original File Date:** 02/17/2006      **Effective Date:** 02/17/2006  
**State of Origin:** North Dakota

#### Nature of Business

PETROLEUM EQUIPMENT SALES & REPAIRS

#### Principal Office

5705 11TH AVE SE MINOT, ND 58701-9306

#### Registered Agent

**DALE REITER**  
 5705 11TH AVE SE  
 MINOT, ND 58701-9306  
 Established Date: Feb 17, 2006

#### Authorized Shares

Class	Number	Par Value
	50000.000000	\$1.000000

#### Generate an Annual Report To File

To Generate a Annual Report form to be filed with the Secretary of State, select the appropriate year of the report you intend to file. This report does not contain details of a report previously filed with the Secretary of State. The annual report years reflected are an indication of the various report forms available in this site and is not an indication that an entity needs to file reports for all years. Missing years indicate that the forms for the missing year have not yet been deployed to the website, or have already been removed, and can be obtained by contacting the Secretary of State.

[2015](#) (generates a forms-fillable pdf in a new pop-up window)

[Return to Search Results](#)

[Contact Us](#)
[Disclaimer](#)
[Privacy Policy](#)

We use Secure Sockets Layer (SSL) encryption technology to ensure your information is secure and protected.

Will open a new window (pop-up).

W3C WAI AA, CSS, XHTML Compliant | Copyright 2006. All Rights Reserved. The State of North Dakota.



Receipt Date: April 12, 2016  
Cal. Date: April 12, 2016  
Report Date: April 12, 2016

Report No.: 335818  
Serial No.: 43942  
Barcode: 202305

## Calibration Certificate

REITER OIL & GAS INC.  
P O BOX 2226  
MINOT, ND 58702  
Contact: KEVIN REITER  
Phone: 701-839-6791  
PO Number: NONE  
SOP: 19  
Technician ID: 07

Item(s) Submitted: 5 Gallon Measure  
Manufacturer: Seraphin  
Material: Mild Steel  
Type: Measure  
Condition: Good  
Temperature: 18.0 °C  
Pressure: 745.5 mmHg  
Relative Humidity: 36.3 %  
Standard H<sub>2</sub>O Temp.: 18.3 °C  
Artifact H<sub>2</sub>O Temp.: 18.4 °C

Nominal Volume (gal)		Calibrated Volume (gal)	Error (in <sup>3</sup> )	<i>k</i>	U (in <sup>3</sup> )	CCE (°F)
5	As Found	5.0009	0.21	2.06	0.24	0.0000186
	As Left	5.0004	0.08			

Neck Calibration: No neck calibration was performed at this time.

This prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds followed by a drain time of 10 seconds after cessation of full flow.

The prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota using water as the calibration medium. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

All tolerances and specifications were evaluated according to NIST Handbook 105-3 (2010). Uncertainty calculations contain the components in NIST SOP 19 and conform to the ISO/IEC Guide to the Expression of Uncertainty in Measurement (2008), including coverage factors (*k*) calculated at the approximate 95.45 % confidence level. Results apply to item identified in this report only.

CCE is the cubical coefficient of thermal expansion, and the reference temperature is 60 °F

Mark Nicollet

Quality Manager

Reviewed by:

Pete Whebbe

Metrologist



Receipt Date: April 12, 2016  
Cal. Date: April 12, 2016  
Report Date: April 12, 2016

Report No.: 335819  
Serial No.: RG01/ID 051710-1  
Barcode: 202306

## Calibration Certificate

REITER OIL & GAS INC.  
P O BOX 2226  
MINOT, ND 58702

Contact: KEVIN REITER  
Phone: 701-839-6791  
PO Number: NONE  
SOP: 19  
Technician ID: 07

Item(s) Submitted: 5 Gallon Measure  
Manufacturer: Seraphin  
Material: Mild Steel  
Type: Measure  
Condition: Good  
Temperature: 18.0 °C  
Pressure: 745.5 mmHg  
Relative Humidity: 36.3 %  
Standard H<sub>2</sub>O Temp.: 14.6 °C  
Artifact H<sub>2</sub>O Temp.: 14.6 °C

Nominal		Calibrated				
Volume (gal)		Volume (gal)	Error (in <sup>3</sup> )	<i>k</i>	U (in <sup>3</sup> )	CCE (°F)
5	As Found	4.9986	-0.32	2.06	0.24	0.0000186
	As Left	4.9997	-0.08			

Neck Calibration: No neck calibration was performed at this time.


This prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds followed by a drain time of 10 seconds after cessation of full flow.

The prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota using water as the calibration medium. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

All tolerances and specifications were evaluated according to NIST Handbook 105-3 (2010). Uncertainty calculations contain the components in NIST SOP 19 and conform to the ISO/IEC Guide to the Expression of Uncertainty in Measurement (2008), including coverage factors (*k*) calculated at the approximate 95.45 % confidence level. Results apply to item identified in this report only.


CCE is the cubical coefficient of thermal expansion, and the reference temperature is 60 °F

Mark Nicollet

  
Quality Manager

Reviewed by:

Pete Whebbe

  
Metrologist



Receipt Date: April 12, 2016  
Cal. Date: April 12, 2016  
Report Date: April 12, 2016

Report No.: 335820  
Serial No.: 43918  
Barcode: 202307

## Calibration Certificate

REITER OIL & GAS INC.  
P O BOX 2226  
MINOT, ND 58702

Contact: KEVIN REITER  
Phone: 701-839-6791  
PO Number: NONE  
SOP: 19  
Technician ID: 07

Item(s) Submitted: 5 Gallon Measure  
Manufacturer: Seraphin  
Material: Mild Steel  
Type: Measure  
Condition: Good  
Temperature: 18.0 °C  
Pressure: 745.5 mmHg  
Relative Humidity: 36.3 %  
Standard H<sub>2</sub>O Temp.: 14.6 °C  
Artifact H<sub>2</sub>O Temp.: 14.6 °C

Nominal		Calibrated				
Volume (gal)		Volume (gal)	Error (in <sup>3</sup> )	<i>k</i>	U (in <sup>3</sup> )	CCE (°F)
5	As Found	4.9994	-0.13	2.06	0.24	0.0000186
	As Left	4.9994	-0.13			

Neck Calibration: No neck calibration was performed at this time.

This prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds followed by a drain time of 10 seconds after cessation of full flow.

The prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota using water as the calibration medium. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

All tolerances and specifications were evaluated according to NIST Handbook 105-3 (2010). Uncertainty calculations contain the components in NIST SOP 19 and conform to the ISO/IEC Guide to the Expression of Uncertainty in Measurement (2008), including coverage factors (*k*) calculated at the approximate 95.45 % confidence level. Results apply to item identified in this report only.

CCE is the cubical coefficient of thermal expansion, and the reference temperature is 60 °F

Mark Nicollet

*Mark Nicollet*  
Quality Manager

Reviewed by:

Pete Whebbe

*Pete Whebbe*  
Metrologist



Receipt Date: April 12, 2016  
Cal. Date: April 12, 2016  
Report Date: April 12, 2016

Report No.: 335821  
Serial No.: 13-91114  
Barcode: 202509

## Calibration Certificate

REITER OIL & GAS INC.

P O BOX 2226

MINOT, ND 58702

Contact: KEVIN REITER

Phone: 701-839-6791

PO Number: NONE

SOP: 19

Technician ID: 07

Item(s) Submitted: 5 Gallon Measure

Manufacturer: Seraphin

Material: Stainless Steel

Type: Measure

Condition: Excellent

Temperature: 18.0 °C

Pressure: 745.5 mmHg

Relative Humidity: 36.3 %

Standard H<sub>2</sub>O Temp.: 14.7 °C

Artifact H<sub>2</sub>O Temp.: 14.7 °C

Nominal		Calibrated				
Volume (gal)		Volume (gal)	Error (in <sup>3</sup> )	<i>k</i>	U (in <sup>3</sup> )	CCE (1/°F)
5	As Found	5.0001	0.01	2.06	0.24	0.0000265
	As Left	5.0001	0.01			

Neck Calibration: No neck calibration was performed at this time.

This prover has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds followed by a drain time of 10 seconds after cessation of full flow.

The prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota using water as the calibration medium. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

All tolerances and specifications were evaluated according to NIST Handbook 105-3 (2010). Uncertainty calculations contain the components in NIST SOP 19 and conform to the ISO/IEC Guide to the Expression of Uncertainty in Measurement (2008), including coverage factors (*k*) calculated at the approximate 95.45 % confidence level. Results apply to item identified in this report only.

CCE is the cubical coefficient of thermal expansion, and the reference temperature is 60 °F

Mark Nicollet

*Mark Nicollet*  
Quality Manager

Reviewed by:

Pete Whebbe

*Peter J. Whebbe*  
Metrologist



Receipt Date: April 12, 2016  
Cal. Date: April 12, 2016  
Report Date: April 12, 2016

Report No.: 335817  
Serial No.: 101011122-0101  
Barcode: 201648

## Calibration Certificate

REITER OIL & GAS INC.  
P O BOX 2226  
MINOT, ND 58702  
Contact: Kevin Reiter  
Phone: 701-839-6791  
PO Number: None  
SOP: 19  
Technician ID: 19

Item(s) Submitted: 100 Gallon Prover  
Manufacturer: Determan Brownie  
Material: Stainless Steel (304)  
Type: No Bottom Zero  
Condition: Excellent  
Temperature: 18.1 °C  
Pressure: 745.5 mmHg  
Relative Humidity: 37.7 %  
Standard H<sub>2</sub>O Temp.: 8.7 °C  
Artifact H<sub>2</sub>O Temp.: 8.8 °C

Nominal Volume (gal)	Calibrated		Error (in <sup>3</sup> )	k	U (in <sup>3</sup> )	CCE (1/°F)
	As Found	As Left				
100	As Found	100.003	0.6	2.01	3.3	0.0000288
	As Left	100.003	0.6			

Neck Calibration: No neck calibration was performed at this time.

This prover has been calibrated as a "to contain after wet down" vessel with a drain time of 30 seconds after cessation of full flow.

The prover listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota using water as the calibration medium. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

All tolerances and specifications were evaluated according to NIST Handbook 105-3 (2010). Uncertainty calculations contain the components in NIST SOP 19 and conform to the ISO/IEC Guide to the Expression of Uncertainty in Measurement (2008), including coverage factors (*k*) calculated at the approximate 95.45 % confidence level. Results apply to item identified in this report only.

CCE is the cubical coefficient of thermal expansion, and the reference temperature is 60 °F

Erik Alfvin

Metrologist

Reviewed by:

Mark Nicollet

Quality Manager

# United States Department of Commerce

## National Institute of Standards and Technology

Certificate of Metrological Traceability For:

# Minnesota

This laboratory has demonstrated evidence of an unbroken chain of metrological traceability of its standards to the international system of units (SI), documented measurement uncertainties, uses documented measurement procedures, successfully completed training and proficiency tests, documented calibration intervals, submitted a quality management system, and demonstrated suitable measurement assurance for the Scope listed on this certificate.

The Office of Weights and Measures Program assesses laboratories to NIST Handbook 143 - Program Handbook for State Weights and Measures Laboratories and ISO/IEC 17025:2005.

### Scope

<b>Mass Echelon II</b>	<b>Weight Carts</b>	<b>Volume Gravimetric, I</b>
50 kg to 1 mg	10 000 lb to 2000 lb	20 L to 10 mL
1000 lb to 0.001 lb	Wheel Load Weighers	100 gal to 0.25 qt
4 oz to 0.03125 oz	20 000 lb to 2000 lb	<b>Volume Transfer, II</b>
<b>Mass Echelon III</b>	Railroad Test Cars	1500 gal to 5 gal
50 kg to 1 mg	110 000 lb to 80 000 lb	100 gal to 25 gal LPG
5000 lb to 0.001 lb		
4 oz to 0.03125 oz		



2016 to 2017

Carol T. Hockert, Chief  
NIST Office of Weights and Measures

Effective Dates: 2016-01-01 to 2017-12-31