



APPLICATION FOR REGISTRATION AS A REGISTERED SERVICE COMPANY
 Public Service Commission
 SFN 51277 (2/2014)



TYPE OR PRINT - AN INCOMPLETE OR ILLEGIBLE APPLICATION WILL BE REJECTED

Name of Company <i>Petroleum Calibration Service</i>	Email Address <i>petroleumcalibration@gmail.com</i>	Application Date <i>11/29/16</i>	
Mailing Address <i>203 E. Hwy 61</i>	City <i>ESKO</i>	State <i>MN</i>	Zip Code <i>55733</i>
Telephone Number	Cell Phone Number <i>(218) 213 6536</i>	Fax Number	

Select below all device types your company will certify:

Scales (include maximum capacity, if applicable)	Liquid (include maximum flow rate, if applicable)
<input type="checkbox"/> 1. Rail <input type="checkbox"/> 2. Truck <input type="checkbox"/> 3. Livestock <input type="checkbox"/> 4. Hopper: Max. Capacity: _____ <input type="checkbox"/> 5. Belt <input type="checkbox"/> 6. Over 30 lbs.: Max. Capacity: _____ <input type="checkbox"/> 7. 30 lbs. or less <input type="checkbox"/> 8. Class II (indicate on your calibration report which weight kit is Class II certified) <input type="checkbox"/> 9. Other: Please List:	<input checked="" type="checkbox"/> 1. Retail Fuel (less than 20 gal. per minute) <input type="checkbox"/> 2. High Flow Retail Fuel (20 gal. per minute or greater) <input type="checkbox"/> 3. Vehicle Tank: Max. Flow Rate: _____ <input type="checkbox"/> 4. Stationary Bulk (fuel or oil): Max. Flow Rate: _____ <input type="checkbox"/> 5. LPG <input type="checkbox"/> 6. Stationary LPG <input type="checkbox"/> 7. Fertilizer: Max. Flow Rate: _____ <input type="checkbox"/> 8. Chemical <input type="checkbox"/> 9. Anhydrous <input type="checkbox"/> 10. Loading Rack <input type="checkbox"/> 11. Other: Please List:

List below all persons employed by your company as a North Dakota Registered Service Person and the device types they are registered to certify (attach a separate sheet to list additional employees):

Permit No.	Employee	Device Types Registered to Certify (list using device type numbers from above)
e.g. 1001	e.g. John Doe	e.g. Scales - 2, 3, 6, 8; e.g. Liquid - 1, 2, 6
<i>1625</i>	<i>Eugene H Lewis</i>	<i>Retail Fuel (less than 20 gal.)</i>

Continued on Page 2



List below all field standards (attach current calibration reports):

Scraphin 5 Gal. S/N 49433-A	
Scraphin 5 Gal S/N 49433-C	
Scraphin 5 Gal S/N 00-13657-15	


Additional Application Items (initial where appropriate):

Standardized Test Report	<u> </u> Copy enclosed <u>CHV</u> No change in report filed previously
Tested and Approved Sticker	<u> </u> Copy enclosed <u>CHV</u> No change in sticker filed previously
Photocopy of Crimped Lead Wire Seal	<u> </u> Copy enclosed <u>CHV</u> No change in crimped lead wire seal filed previously

Public Company Listing:

Include my company information on your registered service company list for public contact.
 Yes No

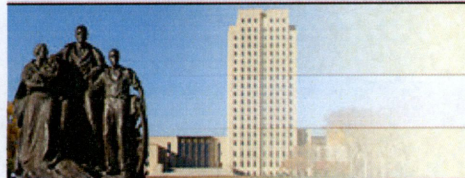
I am Eugene H Lewis, and have authority to represent this company.
By signing this application, I declare that I have examined this form and accompanying documentation, and to the best of my knowledge and belief, the facts stated and documentation provided is true, correct, and complete.


Signature

Send Completed Application and Related Documents To:

Public Service Commission
600 E Boulevard Ave Dept 408
Bismarck ND 58505-0480
Telephone: (701) 328-2400
Fax: (701) 328-2410

North Dakota

nd.gov Official Portal for
North Dakota State GovernmentNorth Dakota
LEGENDARY

SECRETARY OF STATE NORTH DAKOTA

[Home](#) | [Business Records Search](#)

PETROLEUM CALIBRATION SERVICE LLC

Corporation Details

System ID: 21146000**Phone:** (218) 213-6556**Type:** FOREIGN LIMITED LIABILITY COMPANY**Status:** Active & Good Standing**Original File Date:** 08/01/2005**Effective Date:** 08/01/2005**State of Origin:** Minnesota

Nature of Business

TEST & CALIBRATE RETAIL MOTOR FUEL DISPENSORS

Principal Office

203 E HIGHWAY 61 ESKO, MN 55733-9610

Registered Agent

BUSINESS FILINGS INCORPORATED

314 E THAYER AVE

BISMARCK, ND 58501-4018

Established Date: Dec 22, 2014

Generate an Annual Report To File

To Generate a Annual Report form to be filed with the Secretary of State, select the appropriate year of the report you intend to file. This report does not contain details of a report previously filed with the Secretary of State. The annual report years reflected are an indication of the various report forms available in this site and is not an indication that an entity needs to file reports for all years. Missing years indicate that the forms for the missing year have not yet been deployed to the website, or have already been removed, and can be obtained by contacting the Secretary of State.

[2016](#) (generates a forms-fillable pdf in a new pop-up window)[Return to Search Results](#)[Contact Us](#)[Disclaimer](#) | [Privacy Policy](#)

We use Secure Sockets Layer (SSL) encryption technology to ensure your information is secure and protected.

Will open a new window (pop-up).

W3C WAI AA, CSS, XHTML Compliant | Copyright 2006. All Rights Reserved. The State of North Dakota.

Receipt Date: June 23, 2016
Cal. Date: June 30, 2016
Report Date: June 30, 2016

Report No.: 336130
Serial No.: 49433-A
Barcode: 201323

Calibration Certificate



PETROLEUM CALIBRATION SERVICE
203 E HWY 61
ESKO, MN 55733
Contact: GENE LEWIS
Phone: 218-213-6556
PO Number: NONE
SOP: 19
Technician ID: 11

Item(s) Submitted: 5 Gallon Prover
Manufacturer: Seraphin
Material: Stainless Steel
Type: No Bottom Zero
Condition: Excellent
Temperature: 25.2 °C
Pressure: 736.1 mmHg
Relative Humidity: 43.3 %
Standard H₂O Temp.: 19.6 °C
Artifact H₂O Temp.: 19.8 °C

Nominal Volume (gal)		Calibrated Volume (gal)	Error (in ³)	<i>k</i>	U (in ³)	CCE (°F)
5	As Found	5.0040	0.93	2.06	0.24	0.0000265
	As Left	5.0002	0.06			

Neck Calibration: No neck calibration was performed at this time.

This prover has been calibrated as a "to contain after wet down" vessel with a drain time of 30 seconds after cessation of full flow.

The vessel listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota using water as the calibration medium. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

All tolerances and specifications were evaluated according to NIST Handbook 105-3 (2010). Uncertainty calculations contain the components in NIST SOP 19 and conform to the ISO/IEC Guide to the Expression of Uncertainty in Measurement (2008), including coverage factors (*k*) calculated at the approximate 95.45 % confidence level. Results apply to item identified in this report only.

CCE is the cubical coefficient of thermal expansion, and the reference temperature is 60 °F

Pete Whebbe

Metrologist

Reviewed by:

Mark Nicollet

Quality Manager

Receipt Date: June 23, 2016
Cal. Date: June 30, 2016
Report Date: June 30, 2016

Report No.: 336131
Serial No.: 49433-C
Barcode: 201324

Calibration Certificate



PETROLEUM CALIBRATION SERVICE
203 E HWY 61
ESKO, MN 55733
Contact: GENE LEWIS
Phone: 218-213-6556
PO Number: NONE
SOP: 19
Technician ID: 11

Item(s) Submitted: 5 Gallon Prover
Manufacturer: Seraphin
Material: Stainless Steel
Type: No Bottom Zero
Condition: Excellent
Temperature: 25.2 °C
Pressure: 736.1 mmHg
Relative Humidity: 43.3 %
Standard H₂O Temp.: 20.0 °C
Artifact H₂O Temp.: 20.2 °C

Nominal		Calibrated				
Volume (gal)		Volume (gal)	Error (in ³)	<i>k</i>	U (in ³)	CCE (1/°F)
5	As Found	4.9999	-0.02	2.06	0.24	0.0000265
	As Left	4.9999	-0.02			

Neck Calibration: No neck calibration was performed at this time.

This prover has been calibrated as a "to contain after wet down" vessel with a drain time of 30 seconds after cessation of full flow.

The vessel listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota using water as the calibration medium. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

All tolerances and specifications were evaluated according to NIST Handbook 105-3 (2010). Uncertainty calculations contain the components in NIST SOP 19 and conform to the ISO/IEC Guide to the Expression of Uncertainty in Measurement (2008), including coverage factors (*k*) calculated at the approximate 95.45 % confidence level. Results apply to item identified in this report only.

CCE is the cubical coefficient of thermal expansion, and the reference temperature is 60 °F

Pete Whebbe

Peter J. Whebbe
Metrologist

Reviewed by:

Mark Nicollet

Mark Nicollet
Quality Manager

Receipt Date: June 23, 2016
Cal. Date: June 30, 2016
Report Date: June 30, 2016

Report No.: 336129
Serial No.: 00-13651-15
Barcode: 201325

Calibration Certificate



PETROLEUM CALIBRATION SERVICE
203 E HWY 61
ESKO, MN 55733
Contact: GENE LEWIS
Phone: 218-213-6556
PO Number: NONE
SOP: 19
Technician ID: 11

Item(s) Submitted: 5 Gallon Prover
Manufacturer: Seraphin
Material: Stainless Steel
Type: No Bottom Zero
Condition: Excellent
Temperature: 25.2 °C
Pressure: 736.1 mmHg
Relative Humidity: 43.3 %
Standard H₂O Temp.: 20.3 °C
Artifact H₂O Temp.: 20.4 °C

Nominal		Calibrated				
Volume (gal)		Volume (gal)	Error (in ³)	<i>k</i>	U (in ³)	CCE (1/°F)
5	As Found	5.0027	0.62	2.06	0.24	0.0000265
	As Left	5.0003	0.06			

Neck Calibration: No neck calibration was performed at this time.

This prover has been calibrated as a "to contain after wet down" vessel with a drain time of 30 seconds after cessation of full flow.

The vessel listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota using water as the calibration medium. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

All tolerances and specifications were evaluated according to NIST Handbook 105-3 (2010). Uncertainty calculations contain the components in NIST SOP 19 and conform to the ISO/IEC Guide to the Expression of Uncertainty in Measurement (2008), including coverage factors (*k*) calculated at the approximate 95.45 % confidence level. Results apply to item identified in this report only.

CCE is the cubical coefficient of thermal expansion, and the reference temperature is 60 °F

Pete Whebbe

Pete Whebbe
Metrologist

Reviewed by:

Mark Nicollet

Mark Nicollet
Quality Manager

United States Department of Commerce

National Institute of Standards and Technology

Certificate of Metrological Traceability For:

Minnesota

This laboratory has demonstrated evidence of an unbroken chain of metrological traceability of its standards to the international system of units (SI), documented measurement uncertainties, uses documented measurement procedures, successfully completed training and proficiency tests, documented calibration intervals, submitted a quality management system, and demonstrated suitable measurement assurance for the Scope listed on this certificate.

The Office of Weights and Measures Program assesses laboratories to NIST Handbook 143 - Program Handbook for State Weights and Measures Laboratories and ISO/IEC 17025:2005.

Scope

Mass Echelon II
50 kg to 1 mg
1000 lb to 0.001 lb
4 oz to 0.03125 oz

Mass Echelon III
50 kg to 1 mg
5000 lb to 0.001 lb
4 oz to 0.03125 oz

Weight Carts
10 000 lb to 2000 lb

Wheel Load Weighers
20 000 lb to 2000 lb

Railroad Test Cars
110 000 lb to 80 000 lb

Volume Gravimetric, I
20 L to 10 mL
100 gal to 0.25 qt

Volume Transfer, II
1500 gal to 5 gal
100 gal to 25 gal LPG



2016 to 2017

A handwritten signature in black ink, appearing to read "Carol T. Hockert".

Carol T. Hockert, Chief
NIST Office of Weights and Measures

Effective Dates: 2016-01-01 to 2017-12-31