



APPLICATION FOR REGISTRATION AS A REGISTERED SERVICE COMPANY
 Public Service Commission
 SFN 51277 (2/2014)



TYPE OR PRINT - AN INCOMPLETE OR ILLEGIBLE APPLICATION WILL BE REJECTED

Name of Company Hubbs Inc.	Email Address toddke@hobbsinc.net	Application Date 12/5/17	
Mailing Address 2389 Business Loop I-94	City Handan	State ND	Zip Code 58554
Telephone Number 701-663-6363	Cell Phone Number	Fax Number 701-663-9220	

Select below all device types your company will certify:

Scales (include maximum capacity, if applicable)	Liquid (include maximum flow rate, if applicable)
<input type="checkbox"/> 1. Rail <input type="checkbox"/> 2. Truck <input type="checkbox"/> 3. Livestock <input type="checkbox"/> 4. Hopper: Max. Capacity: _____ <input type="checkbox"/> 5. Belt <input type="checkbox"/> 6. Over 30 lbs.: Max. Capacity: _____ <input type="checkbox"/> 7. 30 lbs. or less <input type="checkbox"/> 8. Class II (indicate on your calibration report which weight kit is Class II certified) <input type="checkbox"/> 9. Other: Please List:	<input checked="" type="checkbox"/> 1. Retail Fuel (less than 20 gal. per minute) <input checked="" type="checkbox"/> 2. High Flow Retail Fuel (20 gal. per minute or greater) <input checked="" type="checkbox"/> 3. Vehicle Tank: Max. Flow Rate: <u>100</u> <input checked="" type="checkbox"/> 4. Stationary Bulk (fuel or oil): Max. Flow Rate: <u>100</u> <input type="checkbox"/> 5. LPG <input type="checkbox"/> 6. Stationary LPG <input type="checkbox"/> 7. Fertilizer: Max. Flow Rate: _____ <input type="checkbox"/> 8. Chemical <input type="checkbox"/> 9. Anhydrous <input type="checkbox"/> 10. Loading Rack <input type="checkbox"/> 11. Other: Please List:

List below all persons employed by your company as a North Dakota Registered Service Person and the device types they are registered to certify (attach a separate sheet to list additional employees):

Permit No.	Employee	Device Types Registered to Certify (list using device type numbers from above)
e.g. 1001	e.g. John Doe	e.g. Scales - 2, 3, 6, 8; e.g. Liquid - 1, 2, 6
1753	Laura Rieniets	1, 2, 3, 4
1755	Matt Wilkins	1, 2, 3, 4

Application for Registration as a Registered Service Company
Page 2

List below all field standards (attach current calibration reports):

5 gal S.S. Seraphin	
5 gal S.S. seraphin	
5 gal S.S. seraphin	
5 gal mild steel Seraphin	
100 gal S.S. prover	

Additional Application Items (Initial where appropriate):

Standardized Test Report	<i>JE</i> Copy enclosed No change in report filed previously
Tested and Approved Sticker	<i>JE</i> Copy enclosed No change in sticker filed previously
Photocopy of Crimped Lead Wire Seal	<i>JE</i> Copy enclosed No change in crimped lead wire seal filed previously

Public Company Listing:

Include my company information on your registered service company list for public contact.
 Yes No


I am Laura Rieniets, and have authority to represent this company.
 By signing this application, I declare that I have examined this form and accompanying documentation, and to the best of my knowledge and belief, the facts stated and documentation provided is true, correct, and complete.

Laura Rieniets

 Signature

Send Completed Application and Related Documents To:

Public Service Commission
 600 E Boulevard Ave Dept 408
 Bismarck ND 58505-0480
 Telephone: (701) 328-2400
 Fax: (701) 328-2410

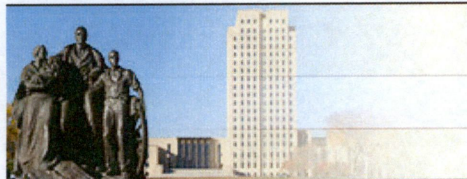

SECRETARY OF STATE NORTH DAKOTA



[Home](#) | [Business Records Search](#)

HOBBS, INC.

Corporation Details

System ID: 1215100 **Phone:** (701) 663-6363
Type: BUSINESS CORPORATION
Status: Active & Good Standing
Original File Date: 05/09/1966 **Effective Date:** 05/09/1966
State of Origin: North Dakota

Nature of Business

PETROLEUM EQUIPMENT SERVICE & SALES

Principal Office

2389 BUSINESS LOOP I-94 MANDAN, ND 58554-

Registered Agent

TODD KRENELKA
 2389 BUSINESS LOOP I-94
 MANDAN, ND 58554-8379
 Established Date: May 31, 2016

Authorized Shares

Class	Number	Par Value
	250.000000	\$.000000

Generate an Annual Report To File

To Generate a Annual Report form to be filed with the Secretary of State, select the appropriate year of the report you intend to file. This report does not contain details of a report previously filed with the Secretary of State. The annual report years reflected are an indication of the various report forms available in this site and is not an indication that an entity needs to file reports for all years. Missing years indicate that the forms for the missing year have not yet been deployed to the website, or have already been removed, and can be obtained by contacting the Secretary of State.

[2017](#) (generates a forms-fillable pdf in a new pop-up window)

[Return to Search Results](#)

[Contact Us](#)

[Disclaimer](#) | [Privacy Policy](#)

We use Secure Sockets Layer (SSL) encryption technology to ensure your information is secure and protected.

Will open a new window (pop-up).

W3C WAI AA, CSS, XHTML Compliant | Copyright 2006. All Rights Reserved. The State of North Dakota.

Receipt Date: September 19, 2017
Cal. Date: October 4, 2017
Report Date: October 4, 2017

Report No.: 338263
Serial No.: 17-60346-31
Barcode: 203264

Calibration Certificate

HOBBS, INC.
2389 BUSINESS LOOP I-94
MANDAN, ND 58554
Contact: JEFF ENGEL
Phone: 701-663-6363
PO Number: 8831
Procedure: NIST SOP 19
Technician ID: 11

Item(s) Submitted: 5 Gallon Measure
Manufacturer: Seraphin
Material: Stainless Steel (304)
Type: Measure
Condition: New
Temperature: 21.3 °C
Pressure: 746.6 mmHg
Relative Humidity: 45.2 %
Standard H₂O Temp.: 20.1 °C
Artifact H₂O Temp.: 20.1 °C

Nominal		Calibrated				
Volume (gal)		Volume (gal)	Error (in ³)	<i>k</i>	U (in ³)	CCE (°F)
5	As Found	4.99964	-0.08	2.06	0.25	0.0000288
	As Left	4.99964	-0.08			

Neck Calibration: Chart meets NIST Handbook 105-3 specifications.


This measure has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds followed by a drain time of 10 seconds after cessation of full flow.

The vessel listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota using water as the calibration medium. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

All tolerances and specifications were evaluated according to NIST Handbook 105-3 (2010). Uncertainty calculations contain the components in NIST SOP 19 and conform to the ISO/IEC Guide to the Expression of Uncertainty in Measurement (2008), including coverage factors (*k*) calculated at the approximate 95.45 % confidence level. Results apply to item identified in this report only.

CCE is the cubical coefficient of thermal expansion, and the reference temperature is 60 °F
Conversion to SI unit: 1 gallon = 231 in³ = 0.00378541 m³.

Pete Whebbe

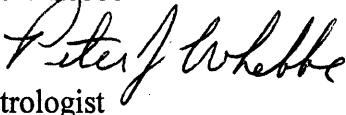
Metrologist

Reviewed by:

Erik Alfvín


Metrologist

Receipt Date: January 24, 2017
 Cal. Date: January 24, 2017
 Report Date: January 24, 2017

Report No.: 337125
 Serial No.: 38086
 Barcode: 201128

Calibration Certificate

HOBBS, INC.
 2389 BUSINESS LOOP I-94
 MANDAN, ND 58554
 Contact: Jeff Engel
 Phone: 701-663-6363
 PO Number: None
 SOP: 19
 Technician ID: 19

Item(s) Submitted: 5 Gallon Measure
 Manufacturer: Seraphin
 Material: Stainless Steel
 Type: Measure
 Condition: Excellent
 Temperature: 19.1 °C
 Pressure: 733.9 mmHg
 Relative Humidity: 47.8 %
 Standard H₂O Temp.: 9.7 °C
 Artifact H₂O Temp.: 9.9 °C

Nominal		Calibrated				
Volume (gal)		Volume (gal)	Error (in ³)	<i>k</i>	U (in ³)	CCE (°F)
5	As Found	4.9997	-0.08	2.06	0.25	0.0000265
	As Left	4.9997	-0.08			

Neck Calibration: No neck calibration was performed at this time.

This measure has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds followed by a drain time of 10 seconds after cessation of full flow.

The vessel listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota using water as the calibration medium. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

All tolerances and specifications were evaluated according to NIST Handbook 105-3 (2010). Uncertainty calculations contain the components in NIST SOP 19 and conform to the ISO/IEC Guide to the Expression of Uncertainty in Measurement (2008), including coverage factors (*k*) calculated at the approximate 95.45 % confidence level. Results apply to item identified in this report only.

CCE is the cubical coefficient of thermal expansion, and the reference temperature is 60 °F
 Conversion to SI unit: 1 gallon = 231 in³ = 0.00378541 m³.


Erik Alfvín



Metrologist

Reviewed by:

Pete Whebbe



Metrologist

Receipt Date: January 24, 2017
 Cal. Date: January 24, 2017
 Report Date: January 24, 2017

Report No.: 337128
 Serial No.: 35213-8
 Barcode: 201130

Calibration Certificate

HOBBS, INC.
 2389 BUSINESS LOOP I-94
 MANDAN, ND 58554
 Contact: Jeff Engel
 Phone: 701-663-6363
 PO Number: None
 SOP: 19
 Technician ID: 19

Item(s) Submitted: 5 Gallon Measure
 Manufacturer: Seraphin
 Material: Stainless Steel
 Type: Measure
 Condition: Excellent
 Temperature: 19.1 °C
 Pressure: 733.9 mmHg
 Relative Humidity: 47.8 %
 Standard H₂O Temp.: 9.7 °C
 Artifact H₂O Temp.: 9.8 °C

Nominal Volume (gal)		Calibrated Volume (gal)	Error (in ³)	<i>k</i>	U (in ³)	CCE (°F)
5	As Found	4.9997	-0.06	2.06	0.25	0.0000265
	As Left	4.9997	-0.06			

Neck Calibration: No neck calibration was performed at this time.

This measure has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds followed by a drain time of 10 seconds after cessation of full flow.

The vessel listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota using water as the calibration medium. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

All tolerances and specifications were evaluated according to NIST Handbook 105-3 (2010). Uncertainty calculations contain the components in NIST SOP 19 and conform to the ISO/IEC Guide to the Expression of Uncertainty in Measurement (2008), including coverage factors (*k*) calculated at the approximate 95.45 % confidence level. Results apply to item identified in this report only.


CCE is the cubical coefficient of thermal expansion, and the reference temperature is 60 °F
 Conversion to SI unit: 1 gallon = 231 in³ = 0.00378541 m³.

Erik Alfvín


 Metrologist

Reviewed by:

Pete Webbe


 Metrologist

Receipt Date: January 24, 2017
 Cal. Date: January 24, 2017
 Report Date: January 24, 2017

Report No.: 337126
 Serial No.: 45206
 Barcode: 201129

Calibration Certificate

HOBBS, INC.
 2389 BUSINESS LOOP I-94
 MANDAN, ND 58554
 Contact: Jeff Engel
 Phone: 701-663-6363
 PO Number: None
 SOP: 19
 Technician ID: 19

Item(s) Submitted: 5 Gallon Measure
 Manufacturer: Seraphin
 Material: Mild Steel
 Type: Measure
 Condition: Excellent
 Temperature: 19.1 °C
 Pressure: 733.9 mmHg
 Relative Humidity: 47.8 %
 Standard H₂O Temp.: 9.6 °C
 Artifact H₂O Temp.: 9.7 °C

Nominal Volume (gal)		Calibrated Volume (gal)	Error (in ³)	<i>k</i>	U (in ³)	CCE (°F)
5	As Found	4.9985	-0.35	2.06	0.25	0.0000186
	As Left	4.9993	-0.16			

Neck Calibration: No neck calibration was performed at this time.

This measure has been calibrated as a "to contain after wet down" vessel with a pour time of 30 seconds followed by a drain time of 10 seconds after cessation of full flow.

The vessel listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota using water as the calibration medium. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

All tolerances and specifications were evaluated according to NIST Handbook 105-3 (2010). Uncertainty calculations contain the components in NIST SOP 19 and conform to the ISO/IEC Guide to the Expression of Uncertainty in Measurement (2008), including coverage factors (*k*) calculated at the approximate 95.45 % confidence level. Results apply to item identified in this report only.

CCE is the cubical coefficient of thermal expansion, and the reference temperature is 60 °F
 Conversion to SI unit: 1 gallon = 231 in³ = 0.00378541 m³.

Erik Alfvin


 Metrologist

Reviewed by:

Pete Whebbe


 Metrologist

Receipt Date: January 24, 2017
Cal. Date: January 24, 2017
Report Date: January 24, 2017

Report No.: 337129
Serial No.: 1362
Barcode: 201127

Calibration Certificate

HOBBS, INC.
2389 BUSINESS LOOP I-94
MANDAN, ND 58554
Contact: JEFF ENGEL
Phone: 701-663-6363
PO Number: NONE
SOP: 19
Technician ID: 11

Item(s) Submitted: 100 Gallon Prover
Manufacturer: Gas Service & Supply
Material: Stainless Steel
Type: No Bottom Zero
Condition: Good
Temperature: 19.3 °C
Pressure: 734.5 mmHg
Relative Humidity: 42.4 %
Standard H₂O Temp.: 7.2 °C
Artifact H₂O Temp.: 7.4 °C

Nominal		Calibrated				
Volume (gal)		Volume (gal)	Error (in ³)	<i>k</i>	U (in ³)	CCE (°F)
100	As Found	100.003	0.7	2.00	2.3	0.0000265
	As Left	100.003	0.7			

Neck Calibration: No neck calibration was performed at this time.

This prover has been calibrated as a "to contain after wet down" vessel with a drain time of 30 seconds after cessation of full flow.

The vessel listed above has been compared by volumetric transfer methods to the standards of the State of Minnesota using water as the calibration medium. The standards are traceable to the SI through NIST. Statistical process control charts indicate standards are currently in control. All gauges were sealed in place.

All tolerances and specifications were evaluated according to NIST Handbook 105-3 (2010). Uncertainty calculations contain the components in NIST SOP 19 and conform to the ISO/IEC Guide to the Expression of Uncertainty in Measurement (2008), including coverage factors (*k*) calculated at the approximate 95.45 % confidence level. Results apply to item identified in this report only.

CCE is the cubical coefficient of thermal expansion, and the reference temperature is 60 °F
Conversion to SI unit: 1 gallon = 231 in³ = 0.00378541 m³.

Pete Whebbe

Metrologist



Reviewed by:

Erik Alfvén

Metrologist



United States Department of Commerce

National Institute of Standards and Technology

Certificate of Metrological Traceability For:

Minnesota

This laboratory has demonstrated evidence of an unbroken chain of metrological traceability of its standards to the international system of units (SI), documented measurement uncertainties, uses documented measurement procedures, successfully completed training and proficiency tests, documented calibration intervals, submitted a quality management system, and demonstrated suitable measurement assurance for the Scope listed on this certificate.


The Office of Weights and Measures Program assesses laboratories to NIST Handbook 143 - Program Handbook for State Weights and Measures Laboratories and ISO/IEC 17025:2005.

Scope

- | | | |
|--|---|--|
| Mass Echelon I
10 kg to 1 mg | Mass Echelon III
50 kg to 1 mg
5000 lb to 0.001 lb
4 oz to 0.03125 oz | Volume Gravimetric, I
20 L to 10 mL
100 gal to 0.25 qt |
| Mass Echelon II
50 kg to 1 mg
1000 lb to 0.001 lb
4 oz to 0.03125 oz | Weight Carts
10 000 lb to 2000 lb | Volume Transfer, II
1500 gal to 5 gal
100 gal to 25 gal LPG |
| | Wheel Load Weighers
20 000 lb to 2000 lb | |
| | Railroad Test Cars
110 000 lb to 80 000 lb | |



2017


Georgia L. Harris, Acting Chief
NIST Office of Weights and Measures

Effective Dates: 2017-01-01 to 2017-12-31

Amended: 2016-12-31
Scope modified for 2017.