

Exam Date:10/19/2010

Busch Agricultural Resources, LLC

Page: 1

Examiner: 1

902 Main Ave W

West Fargo , ND

County:

Phone: 701-282-5752

CCC Number:

Location/Container Numbers/Comments	Section	Capacity
<b>PART A - ADDITIONAL SPACE TO BE INCLUDED UNDER LICENSE</b>		
001S	B	746,073
002S	B	746,073
101	B	3,933
102	B	3,933
	<b>Total:</b>	<b>1,500,012</b>
<b>PART B - SPACE TO BE DELETED UNDER LICENSE</b>		
007	A	29,378
	<b>Total:</b>	<b>29,378</b>
<b>PART C - ALL SPACE TO BE INCLUDED UNDER LICENSE</b>		
	A	699,000
	B	1,501,000
	<b>Total:</b>	<b>2,200,000</b>
<b>PART D - TOTAL CAPACITY BY FUNCTIONAL UNIT</b>		
Sutton 1198	A B	2,200,000
	<b>Total:</b>	<b>2,200,000</b>

Exam Date:10/19/2010

Busch Agricultural Resources, LLC  
 902 Main Ave W  
 West Fargo , ND  
 County:

Page: 1

Examiner: 1

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg).		Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
					Length	Width									

## Facility: Sutton

### Section: A

A	002	Irregular	floor over bins		34.100	0.000	0.000	50.00	0.00	0.00	50.000	0.000	50.0	34.1	3.00	1,756
A	003	Irregular	floor over bins		36.500	0.000	0.000	50.00	0.00	0.00	50.000	0.000	50.0	36.5	3.00	1,880
A	004	Irregular	floor over bins		16.700	0.000	0.000	49.00	0.00	0.00	49.000	0.000	49.0	16.7	2.00	834
A	005	Irregular	floor over bins		97.200	0.000	0.000	68.50	0.00	0.00	68.500	0.000	68.5	97.2	6.00	7,057
A	008	Irregular	floor over bins		108.00	0.000	0.000	46.50	0.00	0.00	46.500	0.000	46.5	108.0	6.20	5,333
A	009	Irregular	floor over bins		37.800	0.000	0.000	50.00	0.00	0.00	50.000	0.000	50.0	37.8	3.00	1,947
A	011	Irregular	floor over bins		100.80	0.000	0.000	68.50	0.00	0.00	68.500	0.000	68.5	100.8	6.00	7,319
A	012	Irregular	floor over bins		69.300	0.000	0.000	50.00	0.00	0.00	50.000	0.000	50.0	69.3	5.20	3,645
A	013 T	Irregular	floor over bins		27.200	0.000	0.000	7.000	0.00	0.00	7.000	0.000	7.0	27.2	2.50	195
A	013 B	Irregular	floor over bins - top 7'		64.800	0.000	0.000	43.00	0.00	0.00	43.000	0.000	43.0	64.8	5.00	2,925
A	014	Irregular	floor over bins		35.300	0.000	0.000	50.00	0.00	0.00	50.000	0.000	50.0	35.3	3.00	1,818
A	016	Irregular	floor over bins		77.400	0.000	0.000	50.00	0.00	0.00	50.000	0.000	50.0	77.4	5.50	4,083
A	017 T	Irregular	floor over bins		80.100	0.000	0.000	50.00	0.00	0.00	50.000	0.000	50.0	80.1	5.50	4,225
A	017 B	Irregular	floor over bins - top 50'		161.20	0.000	0.000	18.50	0.00	0.00	18.500	0.000	18.5	161.2	7.00	3,191
A	018	Irregular	floor over bins		43.600	0.000	0.000	50.00	0.00	0.00	50.000	0.000	50.0	43.6	3.50	2,256
A	019 T	Irregular	floor over bins		144.10	0.000	0.000	61.50	0.00	0.00	61.500	0.000	61.5	144.1	6.80	9,465
A	019 B	Irregular	floor over bins - top 61.5'		122.20	0.000	0.000	6.500	0.00	0.00	6.500	0.000	6.5	122.2	6.50	846
A	020	Irregular	floor over bins		40.800	0.000	0.000	50.00	0.00	0.00	50.000	0.000	50.0	40.8	3.00	2,101
A	022	Irregular	floor over bins		43.600	0.000	0.000	50.00	0.00	0.00	50.000	0.000	50.0	43.6	3.50	2,256
A	023	Irregular	floor over bins		42.200	0.000	0.000	50.00	0.00	0.00	50.000	0.000	50.0	42.2	3.50	2,184
A	025 T	Irregular	floor over bins		144.10	0.000	0.000	61.50	0.00	0.00	61.500	0.000	61.5	144.1	6.80	9,465

Exam Date:10/19/2010

Busch Agricultural Resources, LLC  
 902 Main Ave W  
 West Fargo , ND  
 County:

Page: 2

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg).		Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
					Length	Width									

## Facility: Sutton

### Section: A

A	025 B	Irregular	floor over bins - top 61.5'	122.20	0.000	0.000	6.500	0.00	0.00	6.500	0.000	6.5	122.2	6.50	846
A	026 T	Irregular	floor over bins	77.300	0.000	0.000	46.00	0.00	0.00	46.000	0.000	46.0	77.3	5.50	3,752
A	026 B	Irregular	floor over bins - top 46'	155.40	0.000	0.000	22.50	0.00	0.00	22.500	0.000	22.5	155.4	6.80	3,735
A	027	Irregular	floor over bins	74.700	0.000	0.000	46.00	0.00	0.00	46.000	0.000	46.0	74.7	5.50	3,625
A	028	Irregular	floor over bins	15.600	0.000	0.000	49.00	0.00	0.00	49.000	0.000	49.0	15.6	2.00	779
A	101 T	Irregular	floor over bins	148.30	0.000	0.000	61.50	0.00	0.00	61.500	0.000	61.5	148.3	6.80	9,740
A	101 B	Irregular	floor over bins - top 61.5'	125.80	0.000	0.000	6.500	0.00	0.00	6.500	0.000	6.5	125.8	6.50	871
A	102 T	Irregular	work floor	148.30	0.000	0.000	61.50	0.00	0.00	61.500	0.000	61.5	148.3	6.80	9,740
A	102 B	Irregular	work floor- top 61.5'	125.80	0.000	0.000	6.500	0.00	0.00	6.500	0.000	6.5	125.8	6.50	871
A	103 T	Irregular	work floor	146.90	0.000	0.000	61.50	0.00	0.00	61.500	0.000	61.5	146.9	6.80	9,648
A	103 B	Irregular	work floor - top 61.5'	124.60	0.000	0.000	6.500	0.00	0.00	6.500	0.000	6.5	124.6	6.50	863
A	104 T	Irregular	work floor	146.90	0.000	0.000	61.50	0.00	0.00	61.500	0.000	61.5	146.9	6.80	9,648
A	104 B	Irregular	work floor - top 61.5'	124.60	0.000	0.000	6.500	0.00	0.00	6.500	0.000	6.5	124.6	6.50	863
A	105 T	Irregular	work floor	148.30	0.000	0.000	61.50	0.00	0.00	61.500	0.000	61.5	148.3	6.80	9,740
A	105 B	Irregular	work floor - top 61.5'	125.80	0.000	0.000	6.500	0.00	0.00	6.500	0.000	6.5	125.8	6.50	871
A	106 T	Square	work floor	0.000	17.40	10.60	61.50	0.00	0.00	61.500	0.000	61.5	148.3	6.80	9,740
A	106 B	Square	work floor- top 61.5	0.000	14.90	10.50	6.500	0.00	0.00	6.500	0.000	6.5	125.8	6.50	871
A	107 T	Square	work floor	0.000	17.40	10.50	61.50	0.00	0.00	61.500	0.000	61.5	146.9	6.80	9,648
A	107 B	Square	work floor - top 61.5'	0.000	14.90	10.40	6.500	0.00	0.00	6.500	0.000	6.5	124.6	6.50	863
A	108 T	Square	work floor	0.000	17.40	10.20	61.50	0.00	0.00	61.500	0.000	61.5	142.7	6.80	9,373
A	108 B	Square	work floor- top 61.5'	0.000	14.90	10.10	6.500	0.00	0.00	6.500	0.000	6.5	121.0	6.50	838

Exam Date:10/19/2010

Busch Agricultural Resources, LLC  
 902 Main Ave W  
 West Fargo , ND  
 County:

Page: 3

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg).		Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
					Length	Width									

## Facility: Sutton

### Section: A

A	110 T	Square	work floor		0.000	17.40	10.20	61.50	0.00	0.00	61.500	0.000	61.5	142.7	6.80	9,373
A	110 B	Square	work floor- top 61.5'		0.000	14.90	10.10	6.500	0.00	0.00	6.500	0.000	6.5	121.0	6.50	838
A	111 T	Square	work floor		0.000	17.40	10.50	61.50	0.00	0.00	61.500	0.000	61.5	146.9	6.80	9,648
A	111 B	Square	work floor - top 61.5'		0.000	14.90	10.40	6.500	0.00	0.00	6.500	0.000	6.5	124.6	6.50	863
A	801	Peaked	top of sidewall		42.000	0.000	0.000	64.50	0.00	0.00	64.500	2.500	67.0	1113.7	10.0	82,080
A	802	Peaked	top of sidewall		42.000	0.000	0.000	66.80	0.00	0.00	66.800	2.500	69.3	1113.7	10.0	84,897
A	803	Peaked	top of sidewall		42.000	0.000	0.000	66.80	0.00	0.00	66.800	2.500	69.3	1113.7	10.0	84,897
A	804	Peaked	top of sidewall		42.000	0.000	0.000	66.80	0.00	0.00	66.800	2.500	69.3	1113.7	10.0	84,897
A	805	Peaked	top of sidewall		42.000	0.000	0.000	66.80	0.00	0.00	66.800	2.500	69.3	1113.7	10.0	84,897
A	806	Peaked	top of sidewall		42.000	0.000	0.000	66.80	0.00	0.00	66.800	2.500	69.3	1113.7	10.0	84,897

Bin count: 52

Facility: Sutton Section: A Total: 698,993To Even: 699,000

### Section: B

Added	B	001S	Peaked	top of sidewall	104.70	0.000	0.000	90.70	0.00	0.00	90.700	7.300	98.0	6920.9	10.0	746,073
Added	B	002S	Peaked	top of sidewall	104.70	0.000	0.000	90.70	0.00	0.00	90.700	7.300	98.0	6920.9	10.0	746,073
Added	B	101	Peaked	top of sidewall	16.000	0.000	0.000	20.00	2.00	0.00	22.000	1.000	23.0	161.6	5.80	3,933
Added	B	102	Peaked	top of sidewall	16.000	0.000	0.000	20.00	2.00	0.00	22.000	1.000	23.0	161.6	5.80	3,933

Bin count: 4

Facility: Sutton Section: B Total: 1,500,012To Even: 1,501,000

**Overall Licensed Bin Capacity for:**

**Busch Agricultural Resources, LLC**

**Bin count: 56**

**Licensed Capacity:**  
(includes pack)

**2,199,005 Bu.**

**Licensed Capacity (to even):**  
(includes pack and section totals are  
rounded up to next highest 1000)

**2,200,000 Bu.**

BUSCH AGRICULTURAL RESOURCES LLC.

SUTTON N.D.


Section A

BNSF RAIL

108	107	106	105	104	019	017	016	013	012	011
						018	023	014	009	008
110	111	101	102	103	025	022	020	002	003	
						026	027	XX	XX	005
								028	004	

Section A

wrhse	Office
-------	--------

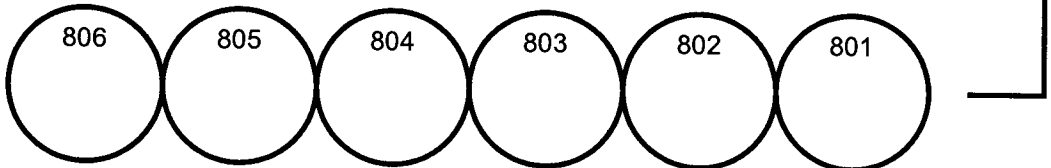

Section A

Section A

Section B

