

Exam Date:08/29/2011

Finley Farmers Grain & Elevator Company

Page: 1

Examiner: 1

PO Box 477  
 Finley, ND  
 County:  
 Phone: 701-524-1500  
 CCC Number:

Location/Container Numbers/Comments	Section	Capacity
<b>PART A - ADDITIONAL SPACE TO BE INCLUDED UNDER LICENSE</b>		
205	A	702,679
		<b>Total: 702,679</b>
<b>PART B - SPACE TO BE DELETED UNDER LICENSE</b>		
<NO BINS DELETED>		
		<b>Total: 0</b>
<b>PART C - ALL SPACE TO BE INCLUDED UNDER LICENSE</b>		
	A	1,632,000
	B	1,189,000
	C	178,000
		<b>Total: 2,999,000</b>
<b>PART D - TOTAL CAPACITY BY FUNCTIONAL UNIT</b>		
Finley 289	A B C	2,999,000
		<b>Total: 2,999,000</b>

Exam Date:08/29/2011

Finley Farmers Grain &amp; Elevator Company

Page: 1

Examiner: 1

PO Box 477

Finley , ND

County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg).		Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
					Length	Width									

## Facility: Finley

### Section: A

A	002	Square	slab over bins		0.000	6.500	5.500	65.00	0.00	0.00	65.000	0.000	65.0	28.7	2.50	1,913
A	003	Square	slab over bins		0.000	6.500	5.500	65.00	0.00	0.00	65.000	0.000	65.0	28.7	2.50	1,913
A	004 T	Square	slab over bins		0.000	13.50	4.000	65.00	0.00	0.00	65.000	0.000	65.0	43.4	3.50	2,920
A	004 B	Square	slab over bins - top 65'		0.000	13.50	10.00	25.00	0.00	0.00	25.000	0.000	25.0	108.5	6.20	2,881
A	005	Square	slab over bins		0.000	5.200	4.000	65.00	0.00	0.00	65.000	0.000	65.0	16.7	2.00	1,108
A	006	Square	slab over bins		0.000	6.500	6.000	65.00	0.00	0.00	65.000	0.000	65.0	31.4	2.50	2,092
A	007	Square	slab over bins		0.000	8.500	6.500	65.00	0.00	0.00	65.000	0.000	65.0	44.4	3.50	2,987
A	008	Square	slab over bins		0.000	13.50	4.500	65.00	0.00	0.00	65.000	0.000	65.0	48.8	4.20	3,305
A	009	Square	slab over bins		0.000	13.50	10.00	65.00	0.00	0.00	65.000	0.000	65.0	108.5	6.20	7,490
A	010	Square	slab over bins		0.000	6.500	6.000	65.00	0.00	0.00	65.000	0.000	65.0	31.4	2.50	2,092
A	011	Square	slab over bins		0.000	8.500	6.500	65.00	0.00	0.00	65.000	0.000	65.0	44.4	3.50	2,987
A	013	Irregular	slab over bins 6x10 less 3x7		31.300	0.000	0.000	65.00	0.00	0.00	65.000	0.000	65.0	31.3	2.50	2,086
A	015	Irregular	floor over bin		64.300	0.000	0.000	17.00	0.00	0.00	17.000	0.000	17.0	64.3	5.00	1,148
A	016	Square	slab over bins		0.000	8.000	6.500	65.00	0.00	0.00	65.000	0.000	65.0	41.8	3.50	2,812
A	018	Square	slab over bins		0.000	13.50	10.00	65.00	0.00	0.00	65.000	0.000	65.0	108.5	6.20	7,490
A	019	Square	slab over bins		0.000	6.500	2.000	65.00	0.00	0.00	65.000	0.000	65.0	10.5	2.00	697
A	020	Square	slab over bins		0.000	6.500	6.200	48.00	0.00	0.00	48.000	0.000	48.0	32.4	2.50	1,594
A	022	Square	slab over bins		0.000	13.50	4.500	65.00	0.00	0.00	65.000	0.000	65.0	48.8	4.20	3,305
A	023	Square	slab over bins		0.000	8.500	6.500	65.00	0.00	0.00	65.000	0.000	65.0	44.4	3.50	2,987
A	024	Square	slab over bins		0.000	10.00	4.000	65.00	0.00	0.00	65.000	0.000	65.0	32.2	2.50	2,145
A	025	Square	slab over bins		0.000	6.500	5.500	65.00	0.00	0.00	65.000	0.000	65.0	28.7	2.50	1,913

### NDPSC Bin Capacity Chart

Exam Date:08/29/2011

Finley Farmers Grain & Elevator Company  
 PO Box 477  
 Finley , ND  
 County:

Examiner: 1

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg).		Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
					Length	Width									

## Facility: Finley

### Section: A

A	026 T	Square	slab over bins	0.000	13.50	4.000	65.00	0.00	0.00	65.000	0.000	65.0	43.4	3.50	2,920
A	026 B	Square	slab over bins - top 65'	0.000	13.50	10.00	25.00	0.00	0.00	25.000	0.000	25.0	108.5	6.20	2,881
A	027	Square	slab over bins	0.000	6.500	5.500	65.00	0.00	0.00	65.000	0.000	65.0	28.7	2.50	1,913
A	028	Square	slab over bins	0.000	8.000	6.500	65.00	0.00	0.00	65.000	0.000	65.0	41.8	3.50	2,812
A	101	Round	slab over bins	18.000	0.000	0.000	96.00	0.00	0.00	96.000	0.000	96.0	204.6	6.00	20,821
A	102	Round	slab over bins	18.000	0.000	0.000	96.00	0.00	0.00	96.000	0.000	96.0	204.6	6.00	20,821
A	103	Irregular	slab over bins	48.500	0.000	0.000	93.00	0.00	0.00	93.000	0.000	93.0	48.5	4.20	4,700
A	104	Round	slab over bins	18.000	0.000	0.000	96.00	0.00	0.00	96.000	0.000	96.0	204.6	6.00	20,821
A	105	Round	slab over bins	18.000	0.000	0.000	96.00	0.00	0.00	96.000	0.000	96.0	204.6	6.00	20,821
A	106	Irregular	slab over bins	48.500	0.000	0.000	93.00	0.00	0.00	93.000	0.000	93.0	48.5	4.20	4,700
A	107	Round	slab over bins	18.000	0.000	0.000	96.00	0.00	0.00	96.000	0.000	96.0	204.6	6.00	20,821
A	108	Round	slab over bins	18.000	0.000	0.000	96.00	0.00	0.00	96.000	0.000	96.0	204.6	6.00	20,821
A	201	Peaked	top sidewall at eave	36.000	0.000	0.000	81.40	0.00	0.00	81.400	2.200	83.6	818.2	10.0	75,242
A	202	Peaked	top sidewall at eave	36.000	0.000	0.000	81.40	0.00	0.00	81.400	2.200	83.6	818.2	10.0	75,242
A	203	Peaked	top sidewall at eave	48.000	0.000	0.000	81.40	0.00	0.00	81.400	3.400	84.8	1454.6	10.0	135,685
A	204	Peaked	eave of bin	74.200	0.000	0.000	99.30	0.00	0.00	99.300	5.200	104.5	3476.0	10.0	399,566
Added	A 205	Peaked	eave of bin	104.70	0.000	0.000	85.00	0.00	0.00	85.000	7.300	92.3	6920.9	10.0	702,679
A	wet bin	Peaked	eave of bin	34.000	0.000	0.000	49.00	0.00	0.00	49.000	2.000	51.0	729.8	9.80	40,868

Bin count: 39

Facility: Finley Section: A Total: 1,631,999

To Even: 1,632,000

Exam Date:08/29/2011

Finley Farmers Grain &amp; Elevator Company

Page: 3

Examiner: 1

PO Box 477

Finley , ND

County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg).		Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
					Length	Width									

## Facility: Finley

### Section: B

B	001	Irregular	slab over bins		27.000	0.000	0.000	73.00	0.00	0.00	73.000	0.000	73.0	27.0	2.50	2,020
B	002	Round	slab over bins		16.000	0.000	0.000	92.00	0.00	0.00	92.000	0.000	92.0	161.6	5.80	15,729
B	004	Round	slab over bins		16.000	0.000	0.000	91.00	0.00	0.00	91.000	0.000	91.0	161.6	5.80	15,559
B	005	Irregular	slab over bins		76.000	0.000	0.000	90.00	0.00	0.00	90.000	0.000	90.0	76.0	5.50	7,216
B	006	Irregular	slab over bins		73.000	0.000	0.000	89.00	0.00	0.00	89.000	0.000	89.0	73.0	5.20	6,835
B	007	Irregular	slab over bins		41.000	0.000	0.000	90.00	0.00	0.00	90.000	0.000	90.0	41.0	3.00	3,801
B	008	Peaked	top sidewall at eave		41.900	0.000	0.000	64.80	0.00	0.00	64.800	2.500	67.3	1108.4	10.0	82,055
B	009	Round	slab over bins		16.000	0.000	0.000	91.00	0.00	0.00	91.000	0.000	91.0	161.6	5.80	15,559
B	010	Round	slab over bins		16.000	0.000	0.000	91.00	0.00	0.00	91.000	0.000	91.0	161.6	5.80	15,559
B	011 T	Irregular	slab over bins		22.000	0.000	0.000	18.00	0.00	0.00	18.000	0.000	18.0	22.0	2.00	404
B	011 B	Irregular	slab over bins -top 18'		54.000	0.000	0.000	52.00	0.00	0.00	52.000	0.000	52.0	54.0	4.50	2,934
B	012	Irregular	slab over bins		52.000	0.000	0.000	72.00	0.00	0.00	72.000	0.000	72.0	52.0	4.50	3,912
B	015	Irregular	slab over bins		52.000	0.000	0.000	72.00	0.00	0.00	72.000	0.000	72.0	52.0	4.50	3,912
B	016	Round	slab over bins		16.000	0.000	0.000	91.00	0.00	0.00	91.000	0.000	91.0	161.6	5.80	15,559
B	017 T	Irregular	slab over bins		36.000	0.000	0.000	17.00	0.00	0.00	17.000	0.000	17.0	36.0	3.00	630
B	017 B	Irregular	slab over bins - top 17'		52.000	0.000	0.000	55.00	0.00	0.00	55.000	0.000	55.0	52.0	4.50	2,989
B	020	Irregular	slab over bins -		35.000	0.000	0.000	73.00	0.00	0.00	73.000	0.000	73.0	35.0	3.00	2,632
B	022	Irregular	slab over bins -		73.000	0.000	0.000	91.00	0.00	0.00	91.000	0.000	91.0	73.0	5.20	6,988
B	023	Round	slab over bins -		16.000	0.000	0.000	92.50	0.00	0.00	92.500	0.000	92.5	161.6	5.80	15,815
B	024	Irregular	slab over bins - 6' hppr		14.000	0.000	0.000	71.00	3.00	0.00	74.000	0.000	74.0	14.0	2.00	1,057
B	025	Irregular	slab over bins - 6' hppr		35.000	0.000	0.000	70.00	3.00	0.00	73.000	0.000	73.0	35.0	3.00	2,632

## NDPSC Bin Capacity Chart

Exam Date:08/29/2011

Finley Farmers Grain & Elevator Company  
 PO Box 477  
 Finley, ND  
 County:

Page: 4

Examiner: 1

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg).		Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
					Length	Width									

## Facility: Finley

### Section: B

B	026	Irregular	slab over bins -	24.000	0.000	0.000	73.00	0.00	0.00	73.000	0.000	73.0	24.0	2.00	1,787
B	201	Round	top of slab	38.000	0.000	0.000	124.5	0.00	0.00	124.50	0.000	124.5	911.7	10.0	124,858
B	202	Round	top of slab	38.000	0.000	0.000	124.5	0.00	0.00	124.50	0.000	124.5	911.7	10.0	124,858
B	203	Irregular	top of slab	32.300	0.000	0.000	59.00	0.00	0.00	59.000	0.000	59.0	32.3	2.50	1,954
B	204	Round	top of slab	60.000	0.000	0.000	124.5	0.00	0.00	124.50	0.000	124.5	2272.9	10.0	311,274
B	205	Peaked	eave of bin	74.200	0.000	0.000	99.30	0.00	0.00	99.300	5.200	104.5	3476.0	10.0	399,566

Bin count: 27

Facility: Finley Section: B Total: **1,188,094**To Even: **1,189,000**

### Section: C

C	001	Square	bin floor - 8' hppr	0.000	7.400	7.300	31.00	4.00	0.00	35.000	0.000	35.0	43.4	3.50	1,572
C	002	Square	bin floor - 8' hppr	0.000	7.400	7.400	31.00	4.00	0.00	35.000	0.000	35.0	44.0	3.50	1,594
C	003	Square	bin floor - 8' hppr	0.000	7.400	7.400	31.00	4.00	0.00	35.000	0.000	35.0	44.0	3.50	1,594
C	004	Square	bin floor - 8' hppr	0.000	7.400	7.300	31.00	4.00	0.00	35.000	0.000	35.0	43.4	3.50	1,572
C	005	Square	bin floor -6' hppr	0.000	7.400	7.300	38.00	3.00	0.00	41.000	0.000	41.0	43.4	3.50	1,841
C	006	Square	bin floor -6' hppr	0.000	7.400	7.400	38.00	3.00	0.00	41.000	0.000	41.0	44.0	3.50	1,867
C	007	Square	bin floor -6' hppr	0.000	7.400	7.400	38.00	3.00	0.00	41.000	0.000	41.0	44.0	3.50	1,867
C	008	Square	bin floor -6' hppr	0.000	7.400	7.300	38.00	3.00	0.00	41.000	0.000	41.0	43.4	3.50	1,841
C	009	Square	bin floor - 4' hopper	0.000	7.300	4.000	40.00	2.00	0.00	42.000	0.000	42.0	23.5	2.00	1,007
C	010	Square	bin floor - 4' hopper	0.000	7.300	4.000	40.00	2.00	0.00	42.000	0.000	42.0	23.5	2.00	1,007

Exam Date:08/29/2011

Finley Farmers Grain & Elevator Company  
 PO Box 477  
 Finley , ND  
 County:

Page: 5

Examiner: 1

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg).		Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
					Length	Width									

## Facility: Finley

### Section: C

C	011	Square	bin floor - 4' hopper	0.000	7.300	4.100	40.00	2.00	0.00	42.000	0.000	42.0	24.1	2.50	1,037
C	012	Square	bin floor - 4' hopper	0.000	7.300	4.100	40.00	2.00	0.00	42.000	0.000	42.0	24.1	2.50	1,037
C	013	Square	bin floor - 4' hopper	0.000	7.300	5.700	40.00	2.00	0.00	42.000	0.000	42.0	33.4	2.50	1,438
C	014	Square	bin floor - 4' hopper	0.000	7.400	5.700	40.00	2.00	0.00	42.000	0.000	42.0	33.9	2.50	1,460
C	015	Square	bin floor - 4' hopper	0.000	7.400	5.700	40.00	2.00	0.00	42.000	0.000	42.0	33.9	2.50	1,460
C	016	Square	bin floor - 4' hopper	0.000	7.300	5.700	40.00	2.00	0.00	42.000	0.000	42.0	33.4	2.50	1,438
C	017	Square	bin floor - 4' hopper	0.000	7.300	5.700	40.00	2.00	0.00	42.000	0.000	42.0	33.4	2.50	1,438
C	018	Square	bin floor - 4' hopper	0.000	7.400	5.700	40.00	2.00	0.00	42.000	0.000	42.0	33.9	2.50	1,460
C	019	Square	bin floor - 4' hopper	0.000	7.400	5.700	40.00	2.00	0.00	42.000	0.000	42.0	33.9	2.50	1,460
C	020	Square	bin floor - 4' hopper	0.000	7.300	5.700	40.00	2.00	0.00	42.000	0.000	42.0	33.4	2.50	1,438
C	021	Square	bin floor - 4' hopper	0.000	7.300	5.800	40.00	2.00	0.00	42.000	0.000	42.0	34.0	2.50	1,464
C	022	Square	bin floor - 4' hopper	0.000	7.400	5.800	40.00	2.00	0.00	42.000	0.000	42.0	34.5	3.00	1,492
C	023	Square	bin floor - 4' hopper	0.000	7.400	5.800	40.00	2.00	0.00	42.000	0.000	42.0	34.5	3.00	1,492
C	024	Square	bin floor - 4' hopper	0.000	7.300	5.800	40.00	2.00	0.00	42.000	0.000	42.0	34.0	2.50	1,464
C	101	Peaked	top sidewall at eave	21.000	0.000	0.000	51.00	0.00	0.00	51.000	1.300	52.3	278.4	6.80	15,550
C	102	Peaked	top sidewall at eave	21.000	0.000	0.000	51.00	0.00	0.00	51.000	1.300	52.3	278.4	6.80	15,550
C	103	Peaked	top sidewall at eave	21.000	0.000	0.000	51.00	0.00	0.00	51.000	1.300	52.3	278.4	6.80	15,550
C	104	Peaked	top sidewall at eave	21.000	0.000	0.000	51.00	0.00	0.00	51.000	1.300	52.3	278.4	6.80	15,550
C	105	Peaked	top sidewall at eave	21.000	0.000	0.000	51.00	0.00	0.00	51.000	1.300	52.3	278.4	6.80	15,550
C	109	Peaked	top sidewall at eave	27.000	0.000	0.000	63.10	0.00	0.00	63.100	1.600	64.7	460.3	8.50	32,312
C	110	Peaked	top sidewall at eave	27.000	0.000	0.000	63.10	0.00	0.00	63.100	1.600	64.7	460.3	8.50	32,312

Client ID: 145

### NDPSC Bin Capacity Chart

08/29/2011 11:08:31 AM

Exam Date:08/29/2011

Finley Farmers Grain & Elevator Company  
PO Box 477  
Finley , ND  
County:

Page: 6

Examiner: 1

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	-------------------------------	--------	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

**Bin count: 31**

**Facility: Finley Section: C Total: 177,714**

**To Even: 178,000**

**Overall Licensed Bin Capacity for:**

**Finley Farmers Grain & Elevator Company**

**Bin count: 97**


**Licensed Capacity:**  
(includes pack)

**2,997,807 Bu.**

**Licensed Capacity (to even):**  
(includes pack and section totals are  
rounded up to next highest 1000)

**2,999,000 Bu.**

FINLEY FARMERS GRAIN & ELEVATOR COMPANY  
FINLEY N.D.  
SECTION C

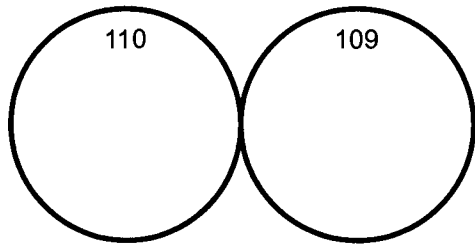


021	022	023	024
020	019	018	017
013	014	015	016
012	XX	XX	011
009	XX	XX	010
008	007	006	005
001	002	003	004
driveway & scale			

SECTION B  
600' north  
→

SECTION A  
100' south  
←



seed hoppers

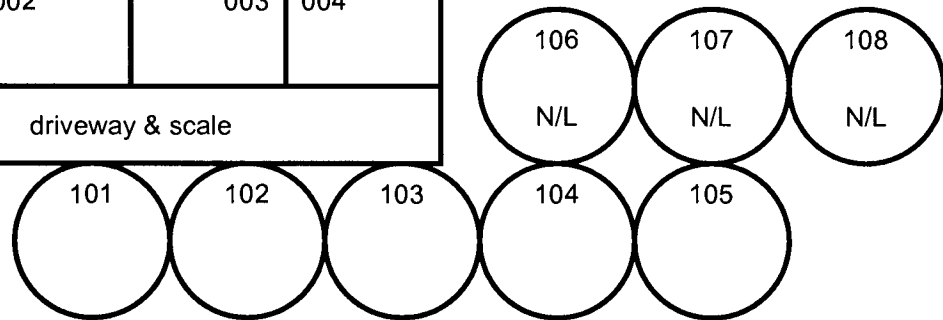


N/L (not licensed)

FINLEY FARMERS GRAIN & ELEVATOR COMPANY  
 FINLEY N.D.  
 SECTION A


BNSF RAIL

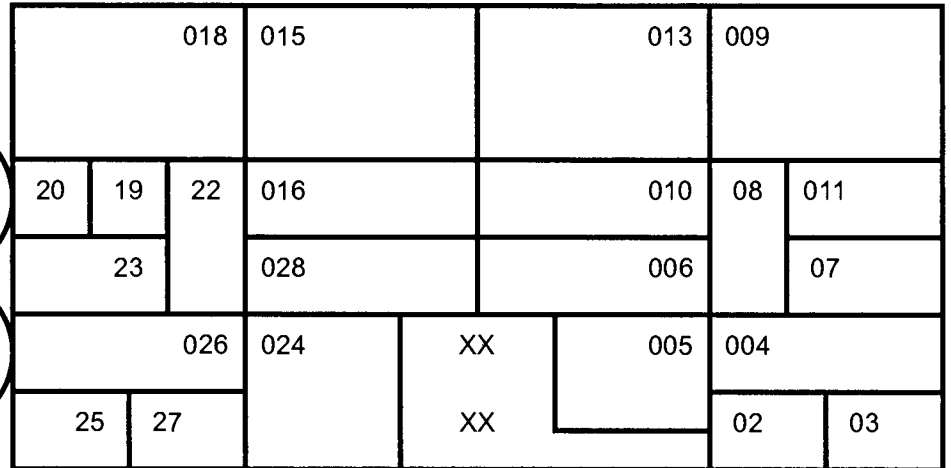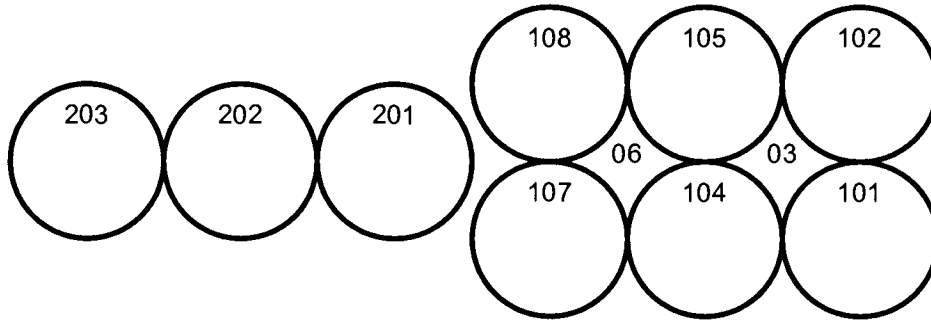

driveway & scale



new construction 09/2011

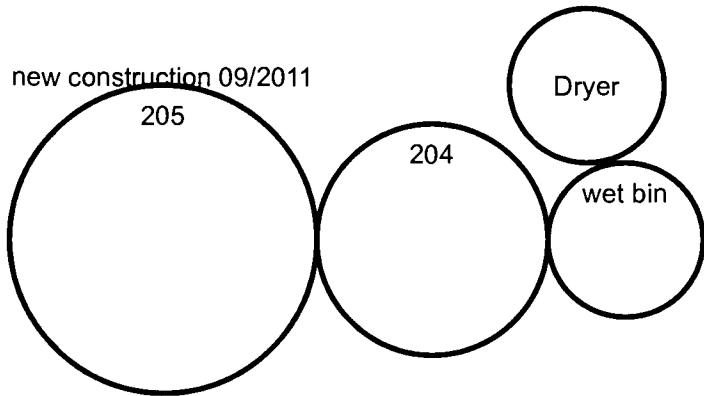

FINLEY FARMERS GRAIN & ELEVATOR COMPANY  
FINLEY N.D.  
SECTION B

BNSF RAIL

