

Exam Date:05/18/2011

Hatton Farmers Elevator

Page: 1

Examiner: 2

PO Box 260

Hatton , ND

County:

Phone: 701-543-3773

CCC Number:

Location/Container Numbers/Comments	Section	Capacity
PART A - ADDITIONAL SPACE TO BE INCLUDED UNDER LICENSE		
003	H	589
004	H	1,521
005 T	H	650
005 B	H	877
007	H	1,467
008 T	H	3,129
008 B	H	2,151
009	H	3,156
010	H	3,156
011 T	H	2,885
011 B	H	2,230
012	H	3,309
013	H	2,885
015	H	3,622
017	H	2,885
018 T	H	2,885
018 B	H	2,230
019	H	3,156
020	H	3,622
021 T	H	3,156
021 B	H	2,440
022 T	H	2,934
022 B	H	2,271
023	H	2,934
024	H	1,056
025	H	1,097
101 T	H	6,210
101 B	H	1,196
102 T	H	6,210
102 B	H	1,196
103 T	H	6,210
103 B	H	1,196
104 T	H	6,373
104 B	H	1,196
105 T	H	6,484
105 B	H	1,217
106 T	H	6,373
106 B	H	1,196
107	H	6,314
108	H	6,435
109	H	6,314
131	H	58,244
132	H	58,244

Location/Container Numbers/Comments	Section	Capacity
133	H	58,244
134	H	58,244
201	H	44,162
202	H	44,162
203	H	44,162
204	H	44,162
301	H	33,450
302	H	33,450
303	H	33,450
304	H	33,450
305	H	33,450
Total:		703,287

PART B - SPACE TO BE DELETED UNDER LICENSE

<NO BINS DELETED>

Total:	0
---------------	----------

PART C - ALL SPACE TO BE INCLUDED UNDER LICENSE

A	358,000
B	23,000
C	39,000
D	549,000
H	704,000
Total:	1,673,000

PART D - TOTAL CAPACITY BY FUNCTIONAL UNIT

Hatton	224	A	B	C	D	H	1,673,000
Total:							1,673,000

Exam Date:05/18/2011

Hatton Farmers Elevator
PO Box 260
Hatton , ND
County:

Page: 1

Examiner: 2

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)		Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
					Length	Width									

Facility: Hatton

Section: A

A	002	Square	floor over bins		0.000	10.30	4.100	51.50	0.00	0.00	51.500	0.000	51.5	33.9	2.50	1,790
A	003	Square	floor over bins		0.000	6.700	5.800	51.50	0.00	0.00	51.500	0.000	51.5	31.2	2.50	1,647
A	004 T	Square	floor over bins		0.000	14.10	4.200	50.00	0.00	0.00	50.000	0.000	50.0	47.6	4.00	2,475
A	004 B	Square	floor over bins - top 50'		0.000	14.10	10.30	21.00	0.00	0.00	21.000	0.000	21.0	116.7	6.20	2,603
A	005	Square	floor over bins		0.000	6.800	5.800	51.50	0.00	0.00	51.500	0.000	51.5	31.7	2.50	1,674
A	006	Square	floor over bins		0.000	11.90	6.600	51.00	0.00	0.00	51.000	0.000	51.0	63.1	5.00	3,379
A	008	Square	floor over bins		0.000	11.90	6.700	51.00	0.00	0.00	51.000	0.000	51.0	64.1	5.00	3,432
A	009	Square	floor over bins		0.000	11.90	6.700	51.00	0.00	0.00	51.000	0.000	51.0	64.1	5.00	3,432
A	010	Square	floor over bins		0.000	14.10	9.300	71.00	0.00	0.00	71.000	0.000	71.0	105.4	6.20	7,947
A	014	Square	floor over bins		0.000	9.300	6.600	51.50	0.00	0.00	51.500	0.000	51.5	49.3	4.20	2,646
A	015	Square	floor over bins		0.000	14.00	9.300	71.00	0.00	0.00	71.000	0.000	71.0	104.7	6.00	7,880
A	016	Square	floor over bins		0.000	11.90	6.600	51.00	0.00	0.00	51.000	0.000	51.0	63.1	5.00	3,379
A	017	Square	floor over bins		0.000	11.90	6.800	51.00	0.00	0.00	51.000	0.000	51.0	65.0	5.00	3,481
A	019	Square	floor over bins		0.000	11.90	6.700	51.00	0.00	0.00	51.000	0.000	51.0	64.1	5.00	3,432
A	020	Square	floor over bins		0.000	6.800	5.800	51.50	0.00	0.00	51.500	0.000	51.5	31.7	2.50	1,674
A	021 T	Square	floor over bins		0.000	14.00	4.200	50.00	0.00	0.00	50.000	0.000	50.0	47.3	4.00	2,460
A	021 B	Square	floor over bins - top 50'		0.000	14.00	10.30	21.00	0.00	0.00	21.000	0.000	21.0	115.9	6.20	2,585
A	022	Square	floor over bins		0.000	6.700	5.800	51.50	0.00	0.00	51.500	0.000	51.5	31.2	2.50	1,647
A	023	Square	floor over bins		0.000	10.30	4.000	51.50	0.00	0.00	51.500	0.000	51.5	33.1	2.50	1,748
A	101 T	Square	north annex work floor		0.000	11.00	10.30	58.50	0.00	0.00	58.500	0.000	58.5	91.1	5.80	5,638
A	101 B	Square	work floor - top 58.5'		0.000	13.20	10.90	12.50	0.00	0.00	12.500	0.000	12.5	115.7	6.20	1,536

Exam Date:05/18/2011

Hatton Farmers Elevator
PO Box 260
Hatton , ND
County:

Page: 2

Examiner: 2

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)		Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
					Length	Width									

Facility: Hatton

Section: A

A	102	Square	work floor		0.000	12.00	10.90	59.00	0.00	0.00	59.000	0.000	59.0	105.1	6.20	6,585
A	103 T	Square	work floor		0.000	11.40	9.300	58.50	0.00	0.00	58.500	0.000	58.5	85.2	5.80	5,273
A	103 B	Square	work floor - top 58.5'		0.000	13.20	11.40	12.50	0.00	0.00	12.500	0.000	12.5	121.0	6.50	1,611
A	104	Square	work floor		0.000	12.00	11.40	59.00	0.00	0.00	59.000	0.000	59.0	110.0	6.20	6,892
A	105 T	Square	work floor		0.000	11.40	10.30	58.50	0.00	0.00	58.500	0.000	58.5	94.4	6.00	5,853
A	105 B	Square	work floor - top 58.5'		0.000	13.20	11.40	12.50	0.00	0.00	12.500	0.000	12.5	121.0	6.50	1,611
A	106 T	Square	work floor		0.000	11.50	10.30	58.50	0.00	0.00	58.500	0.000	58.5	95.2	6.00	5,903
A	106 B	Square	work floor - top 58.5'		0.000	13.20	11.40	12.50	0.00	0.00	12.500	0.000	12.5	121.0	6.50	1,611
A	107	Square	work floor		0.000	12.00	11.50	59.00	0.00	0.00	59.000	0.000	59.0	110.9	6.20	6,949
A	108 T	Square	work floor		0.000	11.50	9.300	58.50	0.00	0.00	58.500	0.000	58.5	86.0	5.80	5,323
A	108 B	Square	work floor - top 58.5'		0.000	13.20	11.40	12.50	0.00	0.00	12.500	0.000	12.5	121.0	6.50	1,611
A	109 T	Square	blind bin first 27' ld - out &		0.000	11.00	9.300	38.00	0.00	0.00	38.000	0.000	38.0	82.2	5.50	3,296
A	109 M	Square	blind bin - top 38'		0.000	11.00	9.300	20.50	0.00	0.00	20.500	0.000	20.5	82.2	5.50	1,778
A	109B	Square	blind bin - top & mddle 58.5'		0.000	13.20	10.90	12.50	0.00	0.00	12.500	0.000	12.5	115.7	6.20	1,536
A	201 T	Square	work floor		0.000	11.50	10.30	58.50	0.00	0.00	58.500	0.000	58.5	95.2	6.00	5,903
A	201 B	Square	work floor - top 58.5'		0.000	13.20	11.50	12.50	0.00	0.00	12.500	0.000	12.5	122.0	6.50	1,624
A	202 T	Square	work floor		0.000	11.40	10.30	58.50	0.00	0.00	58.500	0.000	58.5	94.4	6.00	5,853
A	202 B	Square	work floor - top 58.5'		0.000	13.20	11.40	12.50	0.00	0.00	12.500	0.000	12.5	121.0	6.50	1,611
A	203 T	Square	work floor		0.000	11.20	10.30	58.50	0.00	0.00	58.500	0.000	58.5	92.7	5.80	5,738
A	203 B	Square	work floor - top 58.5'		0.000	13.20	11.10	12.50	0.00	0.00	12.500	0.000	12.5	117.8	6.20	1,564
A	204	Square	work floor		0.000	12.00	11.50	59.00	0.00	0.00	59.000	0.000	59.0	110.9	6.20	6,949

Exam Date:05/18/2011

Hatton Farmers Elevator
PO Box 260
Hatton, ND
County:

Page: 3

Examiner: 2

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	-------------------------------	--------	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

Facility: Hatton

Section: A

A	205	Square	work floor		0.000	12.00	11.40	59.00	0.00	0.00	59.000	0.000	59.0	110.0	6.20	6,892
A	206	Square	work floor		0.000	12.00	11.20	59.00	0.00	0.00	59.000	0.000	59.0	108.0	6.20	6,767
A	208 T	Square	work floor		0.000	11.50	9.300	58.50	0.00	0.00	58.500	0.000	58.5	86.0	5.80	5,323
A	208 B	Square	work floor - top 58.5'		0.000	13.20	11.50	12.50	0.00	0.00	12.500	0.000	12.5	122.0	6.50	1,624
A	209 T	Square	work floor		0.000	11.40	9.300	58.50	0.00	0.00	58.500	0.000	58.5	85.2	5.80	5,273
A	209 B	Square	work floor - top 58.5		0.000	13.20	11.40	12.50	0.00	0.00	12.500	0.000	12.5	121.0	6.50	1,611
A	210 T	Square	work floor		0.000	11.20	9.300	58.50	0.00	0.00	58.500	0.000	58.5	83.7	5.80	5,180
A	210 B	Square	work floor - top 58.5'		0.000	13.20	11.10	12.50	0.00	0.00	12.500	0.000	12.5	117.8	6.20	1,564
A	501	Flat	grain wall 19.5' centr drag		0.000	62.00	60.00	20.00	0.00	0.00	20.000	0.000	20.0	2990.4	10.0	65,789
A	502	Flat	grain wall 19.5' cnter drag		0.000	99.50	60.00	20.00	0.00	0.00	20.000	0.000	20.0	4799.0	10.0	105,578

Bin count: 52

Facility: Hatton Section: A Total: 357,160To Even: 358,000

Section: B

B	002	Square	work floor		0.000	7.300	4.400	18.50	0.00	0.00	18.500	0.000	18.5	25.8	2.50	489
B	003	Square	work floor		0.000	7.500	5.000	18.50	0.00	0.00	18.500	0.000	18.5	30.1	2.50	571
B	005	Square	work floor		0.000	9.600	7.300	18.50	0.00	0.00	18.500	0.000	18.5	56.3	4.80	1,092
B	006	Square	work floor		0.000	7.500	4.500	18.50	0.00	0.00	18.500	0.000	18.5	27.1	2.50	514
B	007	Square	work floor		0.000	7.500	4.400	18.50	0.00	0.00	18.500	0.000	18.5	26.5	2.50	502
B	008	Square	work floor		0.000	7.500	3.800	18.50	0.00	0.00	18.500	0.000	18.5	22.9	2.00	432

Exam Date:05/18/2011

Hatton Farmers Elevator
PO Box 260
Hatton , ND
County:

Page: 4

Examiner: 2

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg).		Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
					Length	Width									

Facility: Hatton

Section: B

B	009	Square	work floor	0.000	5.000	3.700	18.50	0.00	0.00	18.500	0.000	18.5	14.9	2.00	282
B	010	Square	work floor	0.000	5.000	3.100	18.50	0.00	0.00	18.500	0.000	18.5	12.5	2.00	236
B	011	Square	work floor	0.000	7.300	5.000	18.50	0.00	0.00	18.500	0.000	18.5	29.3	2.50	556
B	012	Square	work floor	0.000	5.000	4.000	17.00	0.00	0.00	17.000	0.000	17.0	16.1	2.00	279
B	013	Square	work floor	0.000	5.000	3.600	18.50	0.00	0.00	18.500	0.000	18.5	14.5	2.00	273
B	014	Square	work floor	0.000	7.300	3.800	18.50	0.00	0.00	18.500	0.000	18.5	22.3	2.00	421
B	015	Square	work floor	0.000	5.000	3.300	18.50	0.00	0.00	18.500	0.000	18.5	13.3	2.00	251
B	017	Square	work floor	0.000	7.300	6.500	18.50	0.00	0.00	18.500	0.000	18.5	38.1	3.00	726
B	021	Peaked	top of sidewall - 7.5' hpr	16.000	0.000	0.000	20.00	2.50	0.00	22.500	1.000	23.5	161.6	5.80	4,018
B	022	Peaked	top of sidewall	16.000	0.000	0.000	20.00	2.50	0.00	22.500	1.000	23.5	161.6	5.80	4,018
B	023	Peaked	top of sidewall	16.000	0.000	0.000	20.00	2.50	0.00	22.500	1.000	23.5	161.6	5.80	4,018
B	024	Peaked	top of sidewall	16.000	0.000	0.000	20.00	2.50	0.00	22.500	1.000	23.5	161.6	5.80	4,018

Bin count: 18

Facility: Hatton Section: B Total: 22,696To Even: 23,000

Section: C

C	001	Peaked	top of sidewall	16.000	0.000	0.000	25.00	2.30	0.00	27.300	1.000	28.3	161.6	5.80	4,838
C	002	Peaked	top of sidewall	16.000	0.000	0.000	25.00	2.30	0.00	27.300	1.000	28.3	161.6	5.80	4,838
C	003	Peaked	top of sidewall	16.000	0.000	0.000	25.00	2.30	0.00	27.300	1.000	28.3	161.6	5.80	4,838
C	004	Peaked	top of sidewall	16.000	0.000	0.000	25.00	2.30	0.00	27.300	1.000	28.3	161.6	5.80	4,838

Exam Date:05/18/2011

Hatton Farmers Elevator
PO Box 260
Hatton , ND
County:

Page: 5

Examiner: 2

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)		Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
					Length	Width									

Facility: Hatton

Section: C

C	005	Peaked	top of sidewall	16.000	0.000	0.000	25.00	2.30	0.00	27.300	1.000	28.3	161.6	5.80	4,838
C	006	Peaked	top of sidewall	16.000	0.000	0.000	25.00	2.30	0.00	27.300	1.000	28.3	161.6	5.80	4,838
C	007	Peaked	top of sidewall	16.000	0.000	0.000	25.00	2.30	0.00	27.300	1.000	28.3	161.6	5.80	4,838
C	008	Peaked	top of sidewall	16.000	0.000	0.000	25.00	2.30	0.00	27.300	1.000	28.3	161.6	5.80	4,838

Bin count: 8

Facility: Hatton Section: C Total: 38,704To Even: 39,000

Section: D

D	001	Peaked	top of sidewall	47.800	0.000	0.000	46.50	0.00	0.00	46.500	2.900	49.4	1442.5	10.0	78,386
D	002	Peaked	top of sidewall	47.800	0.000	0.000	46.50	0.00	0.00	46.500	2.900	49.4	1442.5	10.0	78,386
D	003	Peaked	top of sidewall	47.800	0.000	0.000	46.50	0.00	0.00	46.500	2.900	49.4	1442.5	10.0	78,386
D	004	Peaked	top of sidewall	47.800	0.000	0.000	46.50	0.00	0.00	46.500	2.900	49.4	1442.5	10.0	78,386
D	005	Peaked	top of sidewall	47.800	0.000	0.000	46.50	0.00	0.00	46.500	2.900	49.4	1442.5	10.0	78,386
D	006	Peaked	top of sidewall	47.800	0.000	0.000	46.50	0.00	0.00	46.500	2.900	49.4	1442.5	10.0	78,386
D	007	Peaked	top of sidewall	47.800	0.000	0.000	46.50	0.00	0.00	46.500	2.900	49.4	1442.5	10.0	78,386

Bin count: 7

Facility: Hatton Section: D Total: 548,702To Even: 549,000

Exam Date:05/18/2011

Hatton Farmers Elevator
PO Box 260
Hatton , ND
County:

Page: 6

Examiner: 2

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.) Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	---	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

Facility: Hatton

Section: H

Added	H	003	Square	work floor	0.000	5.500	4.500	29.00	0.00	0.00	29.000	0.000	29.0	19.9	2.00	589
Added	H	004	Square	work floor	0.000	6.000	5.500	56.00	0.00	0.00	56.000	0.000	56.0	26.5	2.50	1,521
Added	H	005 T	Square	work floor	0.000	5.500	4.500	32.00	0.00	0.00	32.000	0.000	32.0	19.9	2.00	650
Added	H	005 B	Square	work floor - top 32'	0.000	11.20	4.500	21.00	0.00	0.00	21.000	0.000	21.0	40.5	3.00	877
Added	H	007	Square	work floor	0.000	6.000	5.500	54.00	0.00	0.00	54.000	0.000	54.0	26.5	2.50	1,467
Added	H	008 T	Square	work floor	0.000	12.50	5.500	54.00	0.00	0.00	54.000	0.000	54.0	55.3	4.80	3,129
Added	H	008 B	Square	work floor - top 54'	0.000	12.50	11.20	18.00	0.00	0.00	18.000	0.000	18.0	112.5	6.20	2,151
Added	H	009	Square	work floor	0.000	12.00	6.000	52.00	0.00	0.00	52.000	0.000	52.0	57.9	4.80	3,156
Added	H	010	Square	work floor	0.000	12.00	6.000	52.00	0.00	0.00	52.000	0.000	52.0	57.9	4.80	3,156
Added	H	011 T	Square	work floor	0.000	11.00	6.000	52.00	0.00	0.00	52.000	0.000	52.0	53.1	4.50	2,885
Added	H	011 B	Square	work floor - top 52'	0.000	12.50	11.00	19.00	0.00	0.00	19.000	0.000	19.0	110.5	6.20	2,230
Added	H	012	Square	work floor	0.000	11.00	7.000	51.00	0.00	0.00	51.000	0.000	51.0	61.9	4.80	3,309
Added	H	013	Square	work floor	0.000	11.00	6.000	52.00	0.00	0.00	52.000	0.000	52.0	53.1	4.50	2,885
Added	H	015	Square	work floor	0.000	12.00	7.000	51.00	0.00	0.00	51.000	0.000	51.0	67.5	5.20	3,622
Added	H	017	Square	work floor	0.000	11.00	6.000	52.00	0.00	0.00	52.000	0.000	52.0	53.1	4.50	2,885
Added	H	018 T	Square	work floor	0.000	11.00	6.000	52.00	0.00	0.00	52.000	0.000	52.0	53.1	4.50	2,885
Added	H	018 B	Square	work floor - top 52'	0.000	12.50	11.00	19.00	0.00	0.00	19.000	0.000	19.0	110.5	6.20	2,230
Added	H	019	Square	work floor	0.000	12.00	6.000	52.00	0.00	0.00	52.000	0.000	52.0	57.9	4.80	3,156
Added	H	020	Square	work floor	0.000	12.00	7.000	51.00	0.00	0.00	51.000	0.000	51.0	67.5	5.20	3,622
Added	H	021 T	Square	work floor	0.000	12.00	6.000	52.00	0.00	0.00	52.000	0.000	52.0	57.9	4.80	3,156
Added	H	021 B	Square	work floor - top 52'	0.000	12.50	12.00	19.00	0.00	0.00	19.000	0.000	19.0	120.6	6.50	2,440

Exam Date:05/18/2011

Hatton Farmers Elevator

Page: 7

Examiner: 2

PO Box 260

Hatton , ND

County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	-------------------------------	--------	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

Facility: Hatton

Section: H

Added	H	022 T	Square	work floor	0.000	11.20	6.000	52.00	0.00	0.00	52.000	0.000	52.0	54.0	4.50	2,934
Added	H	022 B	Square	work floor - top 52'	0.000	12.50	11.20	19.00	0.00	0.00	19.000	0.000	19.0	112.5	6.20	2,271
Added	H	023	Square	work floor	0.000	11.20	6.000	52.00	0.00	0.00	52.000	0.000	52.0	54.0	4.50	2,934
Added	H	024	Square	work floor	0.000	5.500	4.500	52.00	0.00	0.00	52.000	0.000	52.0	19.9	2.00	1,056
Added	H	025	Square	work floor	0.000	5.500	4.500	54.00	0.00	0.00	54.000	0.000	54.0	19.9	2.00	1,097
Added	H	101 T	Square	work floor	0.000	11.50	11.50	55.00	0.00	0.00	55.000	0.000	55.0	106.3	6.20	6,210
Added	H	101 B	Square	work floor - top 55'	0.000	13.50	11.50	9.000	0.00	0.00	9.000	0.000	9.0	124.8	6.50	1,196
Added	H	102 T	Square	work floor	0.000	11.50	11.50	55.00	0.00	0.00	55.000	0.000	55.0	106.3	6.20	6,210
Added	H	102 B	Square	work floor - top 55'	0.000	13.50	11.50	9.000	0.00	0.00	9.000	0.000	9.0	124.8	6.50	1,196
Added	H	103 T	Square	work floor	0.000	11.50	11.50	55.00	0.00	0.00	55.000	0.000	55.0	106.3	6.20	6,210
Added	H	103 B	Square	work floor - top 55'	0.000	13.50	11.50	9.000	0.00	0.00	9.000	0.000	9.0	124.8	6.50	1,196
Added	H	104 T	Square	work floor	0.000	11.80	11.50	55.00	0.00	0.00	55.000	0.000	55.0	109.1	6.20	6,373
Added	H	104 B	Square	work floor - top 55'	0.000	13.50	11.50	9.000	0.00	0.00	9.000	0.000	9.0	124.8	6.50	1,196
Added	H	105 T	Square	work floor	0.000	11.80	11.70	55.00	0.00	0.00	55.000	0.000	55.0	111.0	6.20	6,484
Added	H	105 B	Square	work floor - top 55'	0.000	13.50	11.70	9.000	0.00	0.00	9.000	0.000	9.0	127.0	6.50	1,217
Added	H	106 T	Square	work floor	0.000	11.80	11.50	55.00	0.00	0.00	55.000	0.000	55.0	109.1	6.20	6,373
Added	H	106 B	Square	work floor - top 55'	0.000	13.50	11.50	9.000	0.00	0.00	9.000	0.000	9.0	124.8	6.50	1,196
Added	H	107	Square	work floor	0.000	11.50	11.30	57.00	0.00	0.00	57.000	0.000	57.0	104.5	6.00	6,314
Added	H	108	Square	work floor	0.000	11.70	11.30	57.00	0.00	0.00	57.000	0.000	57.0	106.3	6.20	6,435
Added	H	109	Square	work floor	0.000	11.50	11.30	57.00	0.00	0.00	57.000	0.000	57.0	104.5	6.00	6,314
Added	H	131	Peaked	eave at sidewall	41.800	0.000	0.000	45.50	0.00	0.00	45.500	2.500	48.0	1103.1	10.0	58,244

Exam Date:05/18/2011

Hatton Farmers Elevator
PO Box 260
Hatton , ND
County:

Examiner: 2

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	-------------------------------	--------	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

Facility: Hatton

Section: H

Added	H	132	Peaked	eave at sidewall	41.800	0.000	0.000	45.50	0.00	0.00	45.500	2.500	48.0	1103.1	10.0	58,244
Added	H	133	Peaked	eave at sidewall	41.800	0.000	0.000	45.50	0.00	0.00	45.500	2.500	48.0	1103.1	10.0	58,244
Added	H	134	Peaked	eave at sidewall	41.800	0.000	0.000	45.50	0.00	0.00	45.500	2.500	48.0	1103.1	10.0	58,244
Added	H	201	Peaked	eave at sidewall	48.000	0.000	0.000	24.20	0.00	0.00	24.200	3.400	27.6	1454.6	10.0	44,162
Added	H	202	Peaked	eave at sidewall	48.000	0.000	0.000	24.20	0.00	0.00	24.200	3.400	27.6	1454.6	10.0	44,162
Added	H	203	Peaked	eave at sidewall	48.000	0.000	0.000	24.20	0.00	0.00	24.200	3.400	27.6	1454.6	10.0	44,162
Added	H	204	Peaked	eave at sidewall	48.000	0.000	0.000	24.20	0.00	0.00	24.200	3.400	27.6	1454.6	10.0	44,162
Added	H	301	Peaked	eave at sidewall	32.900	0.000	0.000	42.70	0.00	0.00	42.700	2.000	44.7	683.4	9.50	33,450
Added	H	302	Peaked	eave at sidewall	32.900	0.000	0.000	42.70	0.00	0.00	42.700	2.000	44.7	683.4	9.50	33,450
Added	H	303	Peaked	eave at sidewall	32.900	0.000	0.000	42.70	0.00	0.00	42.700	2.000	44.7	683.4	9.50	33,450
Added	H	304	Peaked	eave at sidewall	32.900	0.000	0.000	42.70	0.00	0.00	42.700	2.000	44.7	683.4	9.50	33,450
Added	H	305	Peaked	eave at sidewall	32.900	0.000	0.000	42.70	0.00	0.00	42.700	2.000	44.7	683.4	9.50	33,450

Bin count: 54

Facility: Hatton Section: H Total: 703,287

To Even: 704,000

Overall Licensed Bin Capacity for:

Hatton Farmers Elevator

Bin count: 139


Licensed Capacity:
(includes pack)

1,670,549 Bu.


Licensed Capacity (to even):
(includes pack and section totals are
rounded up to next highest 1000)

1,673,000 Bu.


HATTON FARMERS ELEVATOR CO.
HATTON N.D.
SECTION A

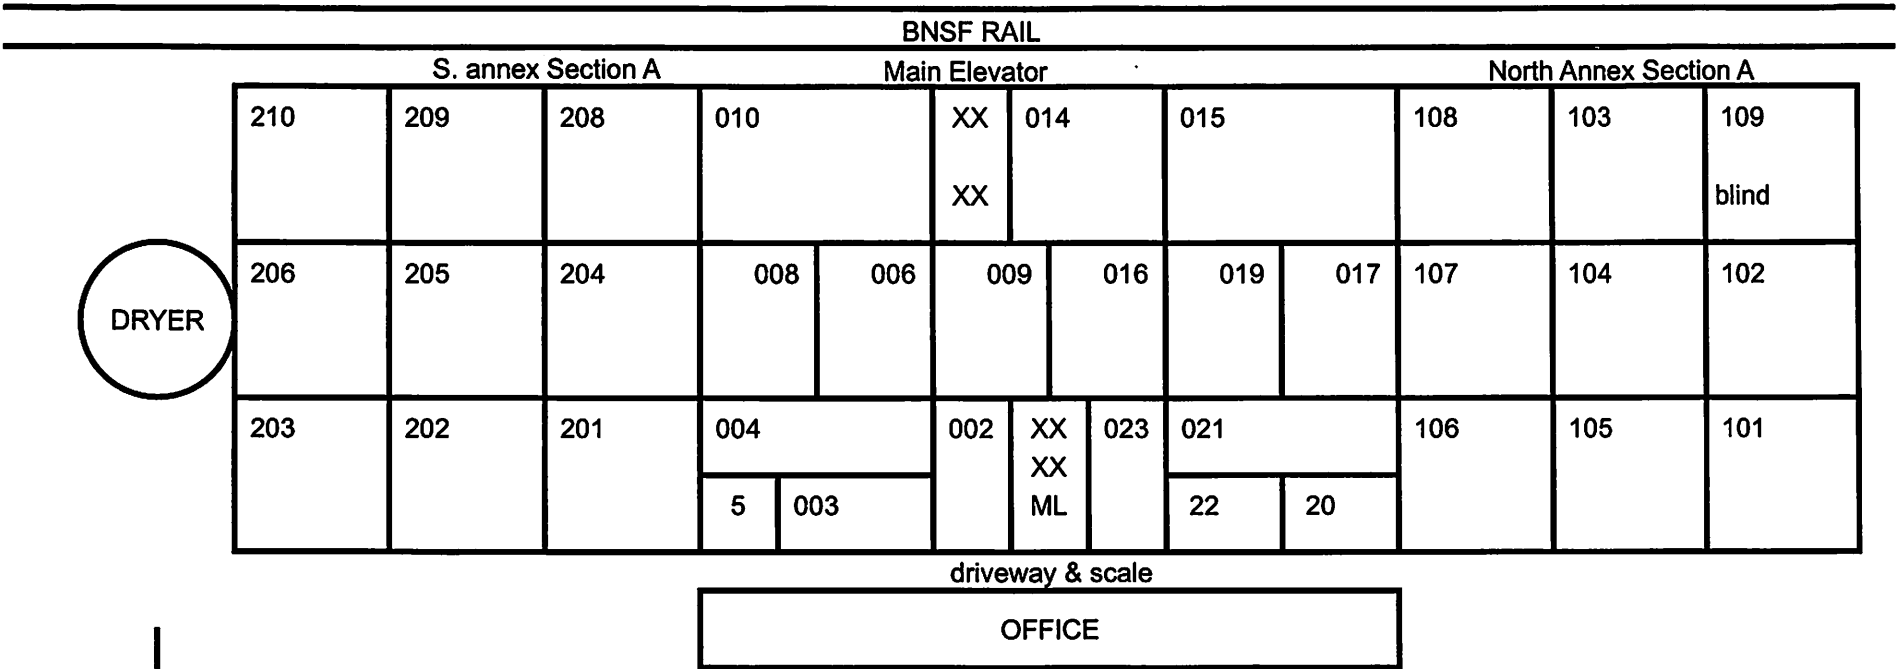



SECTION D
7 tanks- 47.8' dia x 46.5' sidewall

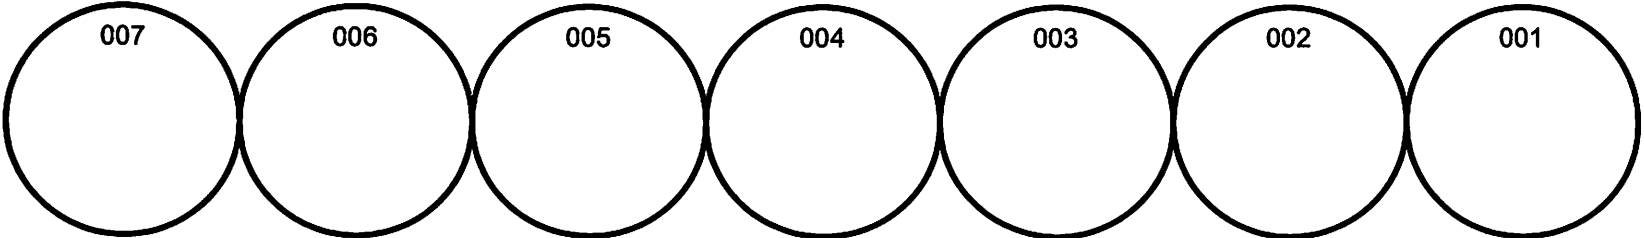



HATTON FARMERS ELEVATOR COMPANY
HATTON N.D.



Elevator seed plant
Section B

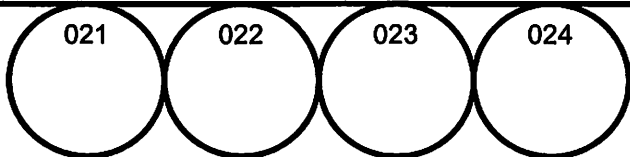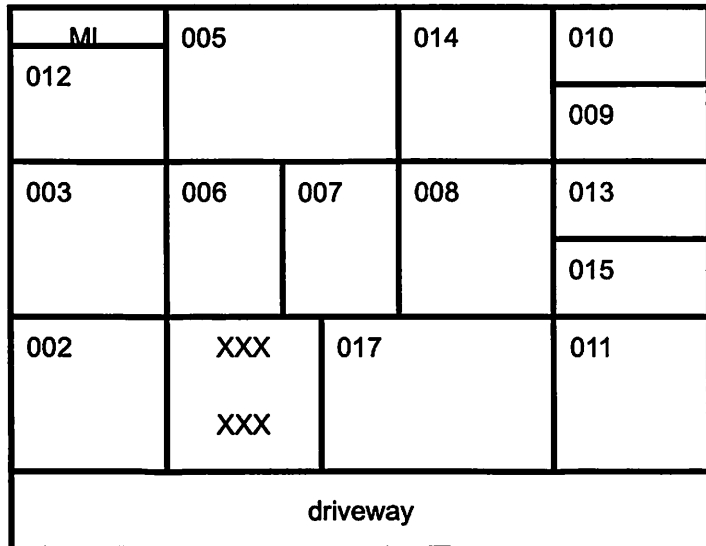

Section A steel flat warehouse

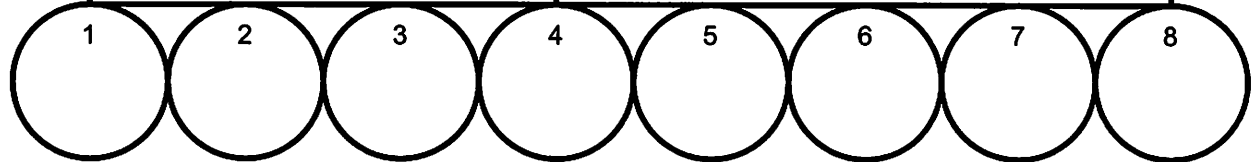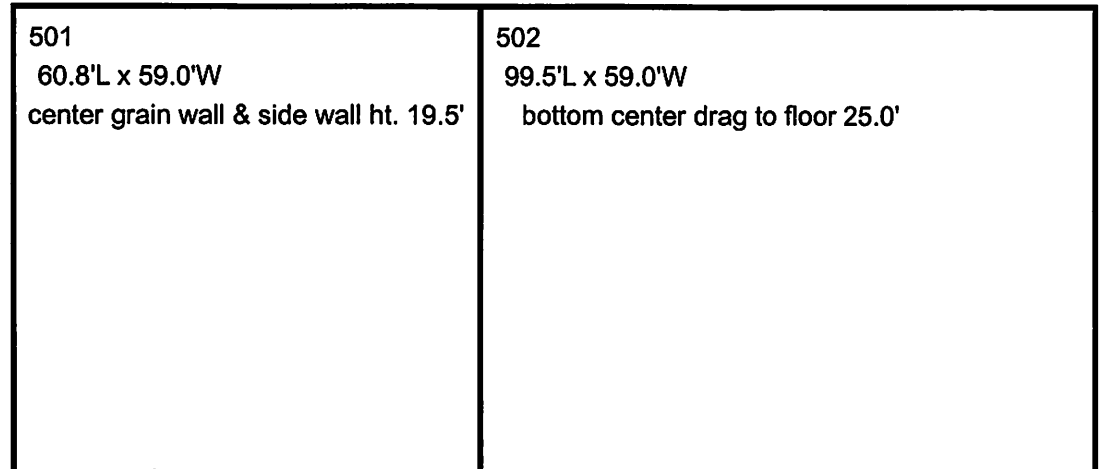

Section C -- 8 metal tanks




HATTON FARMERS ELEVATOR.
HATTON ND
SECTION H
located north 3-blocks from Section A
former Busch Ag facility

BNSF RAILROAD


MAIN ELEVATOR

ANNEX

SECTION H

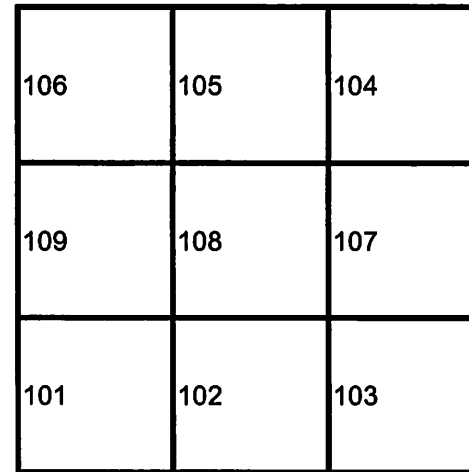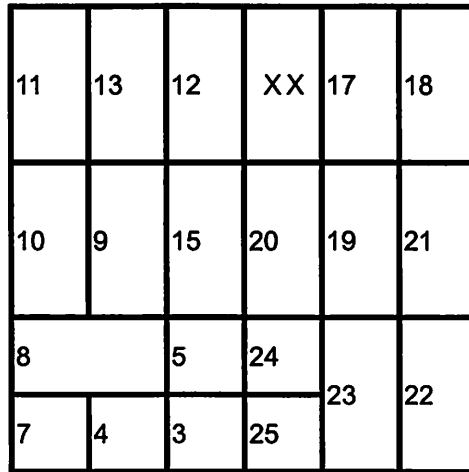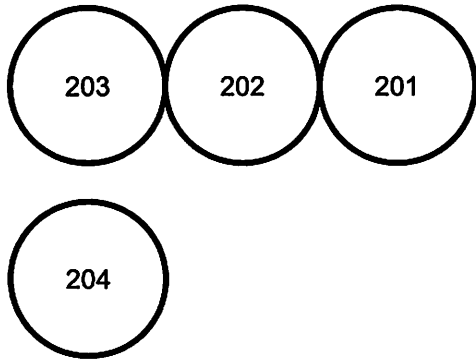


SECTION H

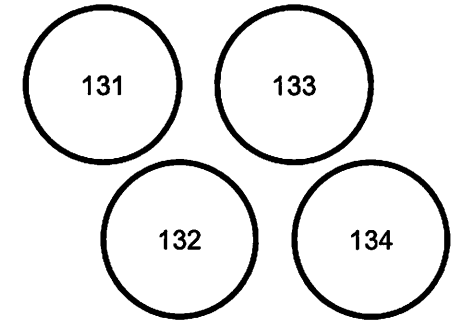

DRIVEWAY & SCALE



SECTION H

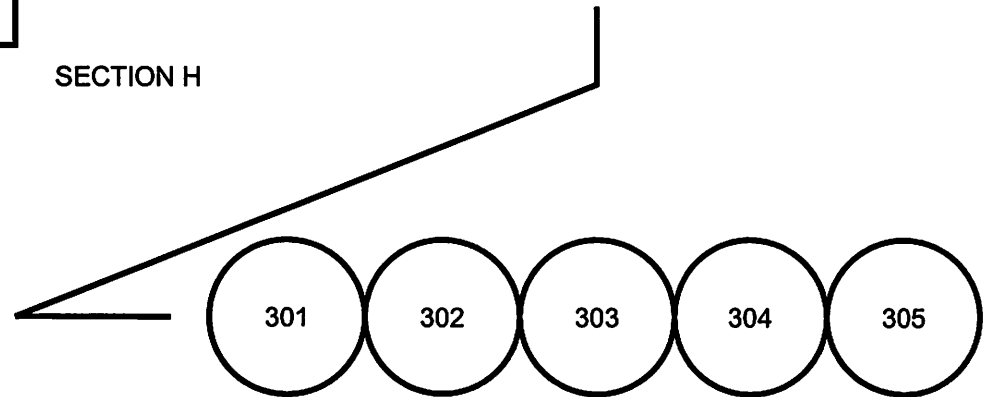

SECTION H