

Exam Date:04/23/2012

The Arthur Companies, Inc.
PO Box 145
Arthur, ND
County:

Page: 1

Examiner: 2

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg).		Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack	
					Length	Width										
<u>Facility: Harvey</u>																
<u>Section: F</u>																
F	001		Square	work floor	0.000	11.50	9.500	39.00	0.00	0.00	39.000	0.000	39.0	87.8	5.80	3,623
F	002		Square	work floor	0.000	11.50	9.500	39.00	0.00	0.00	39.000	0.000	39.0	87.8	5.80	3,623
F	003		Square	work floor	0.000	11.50	9.500	39.00	0.00	0.00	39.000	0.000	39.0	87.8	5.80	3,623
F	004		Square	work floor	0.000	11.50	9.500	39.00	0.00	0.00	39.000	0.000	39.0	87.8	5.80	3,623
F	005		Square	work floor	0.000	11.50	9.500	39.00	0.00	0.00	39.000	0.000	39.0	87.8	5.80	3,623
F	006		Square	work floor	0.000	11.50	9.500	39.00	0.00	0.00	39.000	0.000	39.0	87.8	5.80	3,623
F	007		Square	work floor	0.000	12.00	7.000	34.00	0.00	0.00	34.000	0.000	34.0	67.5	5.20	2,414
F	008		Irregular	12 x 6 square with obstruct	46.600	0.000	0.000	29.00	0.00	0.00	29.000	0.000	29.0	46.6	4.00	1,405
F	009		Irregular	12 x 6 square with obstruct	47.000	0.000	0.000	29.00	0.00	0.00	29.000	0.000	29.0	47.0	4.00	1,418
F	010		Irregular	12 x 9.5 square with obstruct	67.500	0.000	0.000	27.00	0.00	0.00	27.000	0.000	27.0	67.5	5.20	1,918
F	011		Square	work floor	0.000	4.500	4.500	29.00	0.00	0.00	29.000	0.000	29.0	16.3	2.00	482
F	202		Square	work floor	0.000	11.00	8.500	32.50	0.00	0.00	32.500	0.000	32.5	75.2	5.50	2,578
F	203		Square	work floor	0.000	11.00	9.000	43.00	0.00	0.00	43.000	0.000	43.0	79.6	5.50	3,611
F	204		Square	work floor	0.000	9.000	5.500	31.00	0.00	0.00	31.000	0.000	31.0	39.8	3.00	1,271
F	205		Square	work floor	0.000	11.00	9.500	43.00	0.00	0.00	43.000	0.000	43.0	84.0	5.80	3,821
F	206		Square	work floor	0.000	9.500	5.500	29.00	0.00	0.00	29.000	0.000	29.0	42.0	3.50	1,261
F	207		Square	work floor	0.000	9.500	5.000	29.00	0.00	0.00	29.000	0.000	29.0	38.2	3.00	1,141
F	209		Square	work floor	0.000	11.00	9.500	43.00	0.00	0.00	43.000	0.000	43.0	84.0	5.80	3,821
F	210		Square	work floor	0.000	9.000	5.000	31.00	0.00	0.00	31.000	0.000	31.0	36.2	3.00	1,156
F	211		Square	work floor	0.000	11.00	9.000	43.00	0.00	0.00	43.000	0.000	43.0	79.6	5.50	3,611
F	212		Square	work floor	0.000	8.500	5.000	31.00	0.00	0.00	31.000	0.000	31.0	34.2	3.00	1,092

Exam Date:04/23/2012

The Arthur Companies, Inc.
PO Box 145
Arthur, ND
County:

Examiner: 2

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	----------------------------	--------	-------	-----------	----------------	----------------	-----------------	--------------	------------------	------------------	------------	---------------------------

Facility: Harvey

Section: F

F	213	Square	work floor		0.000	8.500	11.00	43.00	0.00	0.00	43.000	0.000	43.0	75.2	5.50	3,412
---	-----	--------	------------	--	-------	-------	-------	-------	------	------	--------	-------	------	------	------	-------

Bin count: 22

Facility: Harvey Section: F Total: 56,150

To Even: 57,000 *

Section: G

G	101	Peaked	eave at side wall		41.900	0.000	0.000	21.40	0.00	0.00	21.400	2.500	23.9	1108.4	10.0	29,140
G	102	Peaked	eave at side wall		41.900	0.000	0.000	21.40	0.00	0.00	21.400	2.500	23.9	1108.4	10.0	29,140

Bin count: 2

Facility: Harvey Section: G Total: 58,280

To Even: 59,000 *

Overall Licensed Bin Capacity for:

The Arthur Companies, Inc.

Bin count: 24

Licensed Capacity:


(includes pack)

Licensed Capacity (to even):

(includes pack and section totals are rounded up to next highest 1000)

* 116,000 bushels

HARVEY FARMERS ELEVATOR
Section F

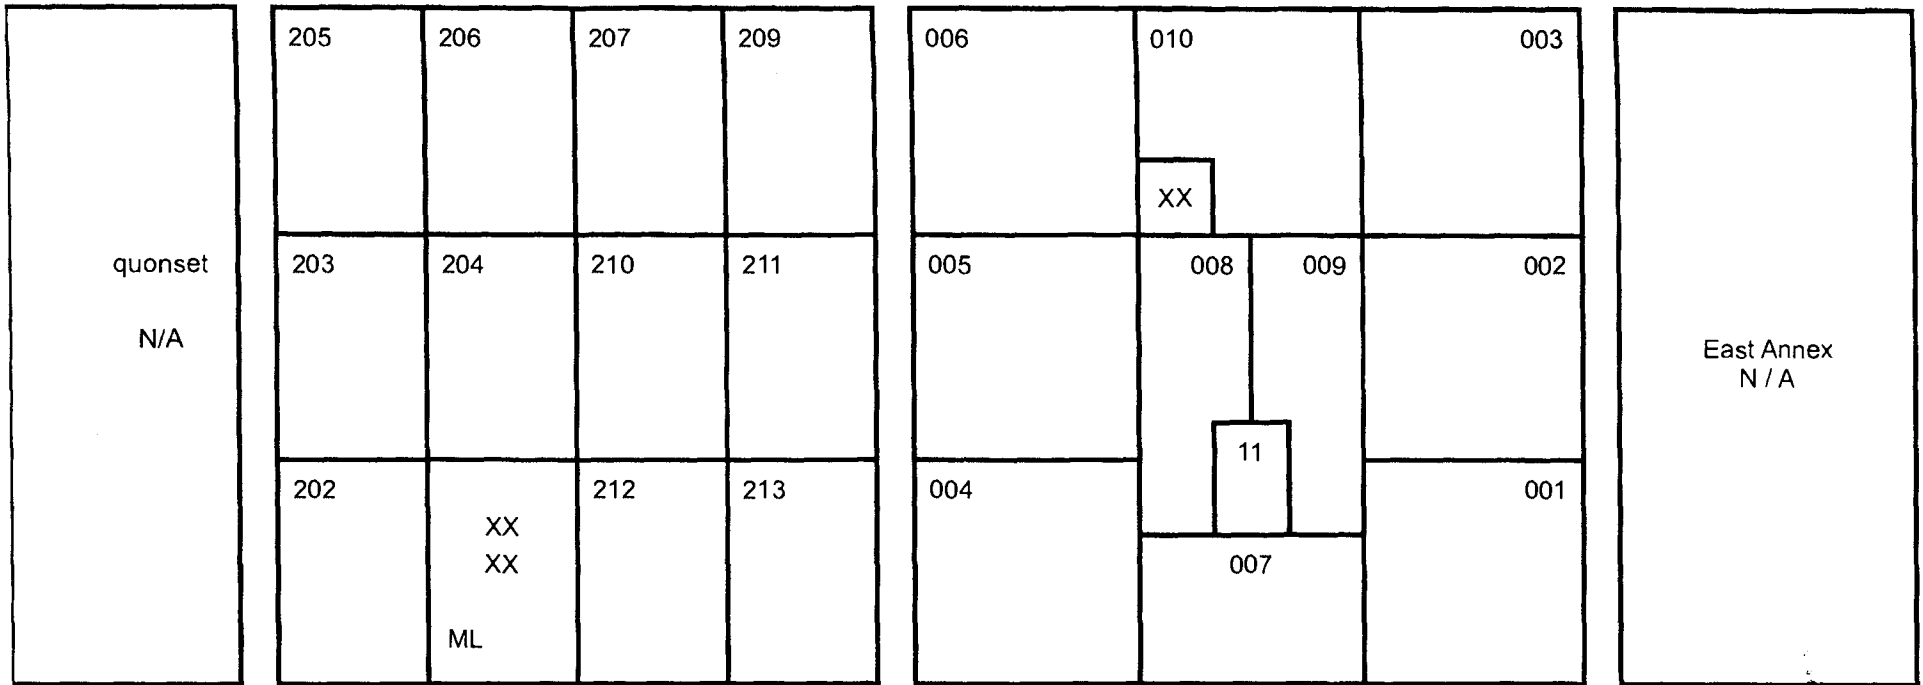

Section F




125' east

Section G

Section G

Driveway & Scale

Section C

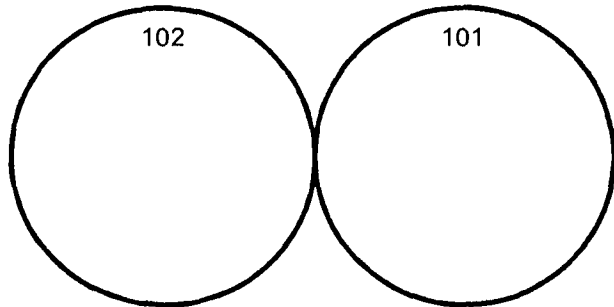

360' east

100

Deleted 8-14-08