

Exam Date:08/12/2013

Renville Elevator Company

Page: 1

Examiner: 1

7900 Van Buren

St. Louis , MO

County:

Phone: 314-638-1447

CCC Number:

Location/Container Numbers/Comments	Section	Capacity
<b>PART A - ADDITIONAL SPACE TO BE INCLUDED UNDER LICENSE</b>		
013	A	206,240
014	A	206,240
015	A	206,240
	<b>Total:</b>	<b>618,720</b>
<b>PART B - SPACE TO BE DELETED UNDER LICENSE</b>		
<NO BINS DELETED>		
	<b>Total:</b>	<b>0</b>
<b>PART C - ALL SPACE TO BE INCLUDED UNDER LICENSE</b>		
	A	1,725,000
	C	118,000
	D	207,000
	<b>Total:</b>	<b>2,050,000</b>
<b>PART D - TOTAL CAPACITY BY FUNCTIONAL UNIT</b>		
Greene 1086	D	207,000
Tolley 702	A C	1,843,000
	<b>Total:</b>	<b>2,050,000</b>

Exam Date:08/12/2013

Renville Elevator Company  
7900 Van Buren  
St. Louis , MO  
County:

Page: 1

Examiner: 1

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg).		Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
					Length	Width									

## Facility: Greene

### Section: D

D	003	Square	work floor		0.000	11.40	9.200	41.50	0.00	0.00	41.500	0.000	41.5	84.3	5.80	3,701
D	004	Square	work floor		0.000	5.300	4.000	28.00	0.00	0.00	28.000	0.000	28.0	17.0	2.00	486
D	005	Square	work floor		0.000	11.20	3.000	28.00	0.00	0.00	28.000	0.000	28.0	27.0	2.50	775
D	006	Square	work floor		0.000	7.700	5.500	30.00	0.00	0.00	30.000	0.000	30.0	34.0	2.50	1,046
D	008	Square	work floor		0.000	11.40	9.200	41.50	0.00	0.00	41.500	0.000	41.5	84.3	5.80	3,701
D	009	Square	work floor		0.000	11.40	8.800	43.00	0.00	0.00	43.000	0.000	43.0	80.6	5.50	3,657
D	010	Square	work floor		0.000	11.40	8.800	40.00	0.00	0.00	40.000	0.000	40.0	80.6	5.50	3,401
D	012	Square	work floor		0.000	11.40	9.000	41.50	0.00	0.00	41.500	0.000	41.5	82.5	5.50	3,612
D	013	Square	work floor		0.000	7.700	5.500	30.00	0.00	0.00	30.000	0.000	30.0	34.0	2.50	1,046
D	014	Square	work floor		0.000	7.600	5.500	30.00	0.00	0.00	30.000	0.000	30.0	33.6	2.50	1,033
D	017	Square	work floor		0.000	7.600	5.500	30.00	0.00	0.00	30.000	0.000	30.0	33.6	2.50	1,033
D	019	Square	work floor		0.000	11.40	9.000	41.50	0.00	0.00	41.500	0.000	41.5	82.5	5.50	3,612
D	101 T	Square	catwalk		0.000	13.60	12.10	35.00	0.00	0.00	35.000	0.000	35.0	132.3	6.50	4,932
D	101 B	Square	catwalk -top 35'		0.000	12.10	11.40	6.500	0.00	0.00	6.500	0.000	6.5	110.9	6.20	766
D	102 T	Square	catwalk		0.000	13.60	12.10	35.00	0.00	0.00	35.000	0.000	35.0	132.3	6.50	4,932
D	102 B	Square	catwalk -top 35'		0.000	12.10	11.40	6.500	0.00	0.00	6.500	0.000	6.5	110.9	6.20	766
D	103 T	Square	catwalk		0.000	13.60	12.20	35.00	0.00	0.00	35.000	0.000	35.0	133.4	6.50	4,972
D	103 B	Square	catwalk -top 35'		0.000	12.20	11.40	6.500	0.00	0.00	6.500	0.000	6.5	111.8	6.20	772
D	104 T	Square	catwalk		0.000	13.60	12.20	35.00	0.00	0.00	35.000	0.000	35.0	133.4	6.50	4,972
D	104 B	Square	catwalk -top 35'		0.000	12.20	11.40	6.500	0.00	0.00	6.500	0.000	6.5	111.8	6.20	772
D	105 T	Square	catwalk		0.000	13.60	12.10	35.00	0.00	0.00	35.000	0.000	35.0	132.3	6.50	4,932

Client ID: 206

### NDPSC Bin Capacity Chart

08/13/2013 08:07:48 AM

Exam Date:08/12/2013

Renville Elevator Company  
7900 Van Buren  
St. Louis , MO  
County:

Page: 2

Examiner: 1

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	-------------------------------	--------	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

## Facility: Greene

### Section: D

D	105 B	Square	catwalk -top 35'		0.000	12.10	11.40	5.500	0.00	0.00	5.500	0.000	5.5	110.9	6.20	648
D	106 T	Square	catwalk		0.000	13.60	12.10	35.00	0.00	0.00	35.000	0.000	35.0	132.3	6.50	4,932
D	106 B	Square	catwalk -top 35'		0.000	12.10	11.40	5.500	0.00	0.00	5.500	0.000	5.5	110.9	6.20	648
D	201	Peaked	top of sidewall		41.900	0.000	0.000	23.00	0.00	0.00	23.000	2.500	25.5	1108.4	10.0	31,090
D	301	Peaked	top of sidewall		47.800	0.000	0.000	33.00	0.00	0.00	33.000	2.900	35.9	1442.5	10.0	56,965
D	302	Peaked	top of sidewall		47.800	0.000	0.000	33.00	0.00	0.00	33.000	2.900	35.9	1442.5	10.0	56,965

Bin count: 27

Facility: Greene Section: D Total: 206,167

To Even: 207,000

**NDPSC Bin Capacity Chart**

Exam Date:08/12/2013

Renville Elevator Company  
7900 Van Buren  
St. Louis , MO  
County:

Examiner: 1

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	-------------------------------	--------	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

**Facility: Tolley**

**Section: A**

	A	001	Peaked	TOE	48.000	0.000	0.000	33.00	0.00	0.00	33.000	3.400	36.4	1454.6	10.0	58,242
	A	002	Peaked	TOE	48.000	0.000	0.000	33.00	0.00	0.00	33.000	3.400	36.4	1454.6	10.0	58,242
	A	003	Peaked	TOE	48.000	0.000	0.000	33.00	0.00	0.00	33.000	3.400	36.4	1454.6	10.0	58,242
	A	004	Peaked	TOE	48.000	0.000	0.000	33.00	0.00	0.00	33.000	3.400	36.4	1454.6	10.0	58,242
	A	005	Peaked	TOE	36.000	0.000	0.000	26.50	0.00	0.00	26.500	2.200	28.7	818.2	10.0	25,830
	A	006	Peaked	TOE	42.000	0.000	0.000	73.50	0.00	0.00	73.500	2.500	76.0	1113.7	10.0	93,105
	A	007	Peaked	TOE	42.000	0.000	0.000	73.50	0.00	0.00	73.500	2.500	76.0	1113.7	10.0	93,105
	A	008	Peaked	TOE	42.000	0.000	0.000	73.50	0.00	0.00	73.500	2.500	76.0	1113.7	10.0	93,105
	A	009	Peaked	TOE	24.000	0.000	0.000	18.50	2.00	0.00	20.500	1.400	21.9	363.7	7.80	8,586
	A	010	Peaked	TOE	53.800	0.000	0.000	69.30	0.00	0.00	69.300	3.800	73.1	1827.4	10.0	146,941
	A	011	Peaked	TOE	53.800	0.000	0.000	98.75	0.00	0.00	98.750	3.800	102.6	1827.4	10.0	206,240
	A	012	Peaked	TOE	53.800	0.000	0.000	98.75	0.00	0.00	98.750	3.800	102.6	1827.4	10.0	206,240
Added	A	013	Peaked	TOE	53.800	0.000	0.000	98.75	0.00	0.00	98.750	3.800	102.6	1827.4	10.0	206,240
Added	A	014	Peaked	TOE	53.800	0.000	0.000	98.75	0.00	0.00	98.750	3.800	102.6	1827.4	10.0	206,240
Added	A	015	Peaked	TOE	53.800	0.000	0.000	98.75	0.00	0.00	98.750	3.800	102.6	1827.4	10.0	206,240

Bin count: 15

Facility: Tolley Section: A Total: **1,724,840**

To Even: **1,725,000**

Exam Date:08/12/2013

Renville Elevator Company  
7900 Van Buren  
St. Louis , MO  
County:

Page: 4

Examiner: 1

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.) Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	---	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

## Facility: Tolley

### Section: C

C	001	Peaked	TOE		13.300	0.000	0.000	12.50	2.00	0.00	14.500	0.800	15.3	111.7	5.20	1,798
C	002	Peaked	TOE		13.300	0.000	0.000	12.50	2.00	0.00	14.500	0.800	15.3	111.7	5.20	1,798
C	003	Peaked	TOE		13.300	0.000	0.000	12.50	2.00	0.00	14.500	0.800	15.3	111.7	5.20	1,798
C	004	Peaked	TOE		13.300	0.000	0.000	12.50	2.00	0.00	14.500	0.800	15.3	111.7	5.20	1,798
C	005	Peaked	TOE		13.300	0.000	0.000	12.50	2.00	0.00	14.500	0.800	15.3	111.7	5.20	1,798
C	006	Peaked	TOE		13.300	0.000	0.000	12.50	2.00	0.00	14.500	0.800	15.3	111.7	5.20	1,798
C	007	Peaked	TOE		13.300	0.000	0.000	12.50	2.00	0.00	14.500	0.800	15.3	111.7	5.20	1,798
C	008	Peaked	TOE		13.300	0.000	0.000	12.50	2.00	0.00	14.500	0.800	15.3	111.7	5.20	1,798
C	009	Peaked	TOE		13.300	0.000	0.000	12.50	2.00	0.00	14.500	0.800	15.3	111.7	5.20	1,798
C	010	Peaked	TOE		13.300	0.000	0.000	12.50	2.00	0.00	14.500	0.800	15.3	111.7	5.20	1,798
C	011	Peaked	TOE		13.300	0.000	0.000	12.50	2.00	0.00	14.500	0.800	15.3	111.7	5.20	1,798
C	012	Peaked	TOE		24.000	0.000	0.000	15.20	3.30	0.00	18.500	1.400	19.9	363.7	7.80	7,803
C	013	Peaked	TOE		24.000	0.000	0.000	15.20	3.30	0.00	18.500	1.400	19.9	363.7	7.80	7,803
C	014	Peaked	TOE		24.000	0.000	0.000	15.20	3.30	0.00	18.500	1.400	19.9	363.7	7.80	7,803
C	015	Peaked	TOE		24.000	0.000	0.000	18.30	2.30	0.00	20.600	1.400	22.0	363.7	7.80	8,625
C	016	Peaked	TOE		24.000	0.000	0.000	18.30	2.30	0.00	20.600	1.400	22.0	363.7	7.80	8,625
C	017	Peaked	TOE		15.500	0.000	0.000	15.00	2.00	0.00	17.000	0.900	17.9	151.7	5.50	2,864
C	018	Peaked	TOE		15.500	0.000	0.000	15.00	2.00	0.00	17.000	0.900	17.9	151.7	5.50	2,864
C	019	Peaked	TOE		16.000	0.000	0.000	20.00	2.00	0.00	22.000	1.000	23.0	161.6	5.80	3,933
C	020	Peaked	TOE		16.000	0.000	0.000	20.00	2.00	0.00	22.000	1.000	23.0	161.6	5.80	3,933
C	021	Peaked	TOE		16.000	0.000	0.000	20.00	2.00	0.00	22.000	1.000	23.0	161.6	5.80	3,933

### NDPSC Bin Capacity Chart

Exam Date:08/12/2013

Renville Elevator Company  
7900 Van Buren  
St. Louis , MO  
County:

Examiner: 1

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	-------------------------------	--------	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

## Facility: Tolley

### Section: C

C	022	Peaked	TOE		15.500	0.000	0.000	20.00	2.00	0.00	22.000	0.900	22.9	151.7	5.50	3,665
C	023	Peaked	TOE		15.500	0.000	0.000	20.00	2.00	0.00	22.000	0.900	22.9	151.7	5.50	3,665
C	024	Peaked	TOE		15.500	0.000	0.000	20.00	2.00	0.00	22.000	0.900	22.9	151.7	5.50	3,665
C	025	Peaked	TOE		15.500	0.000	0.000	20.00	2.00	0.00	22.000	0.900	22.9	151.7	5.50	3,665
C	026	Peaked	TOE		15.500	0.000	0.000	20.00	2.00	0.00	22.000	0.900	22.9	151.7	5.50	3,665
C	027	Peaked	TOE		15.500	0.000	0.000	20.00	2.00	0.00	22.000	0.900	22.9	151.7	5.50	3,665
C	028	Peaked	TOE		24.000	0.000	0.000	18.30	2.30	0.00	20.600	1.400	22.0	363.7	7.80	8,625
C	029	Peaked	TOE		24.000	0.000	0.000	18.30	2.30	0.00	20.600	1.400	22.0	363.7	7.80	8,625

Bin count: 29

Facility: Tolley Section: C Total: 117,204

To Even: 118,000

**Overall Licensed Bin Capacity for:**

Renville Elevator Company

Bin count: 71

**Licensed Capacity:**  
(includes pack)

2,048,211 Bu.

**Licensed Capacity (to even):**  
(includes pack and section totals are  
rounded up to next highest 1000)



2,050,000 Bu.

RENVILLE ELEVATOR COMPANY  
GREENE LOCATION  
SECTION D

Northern Plains Rail

Elevator --zero work floor

ANNEX -- zero catwalk

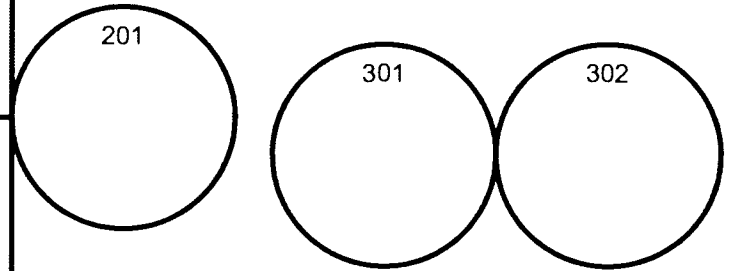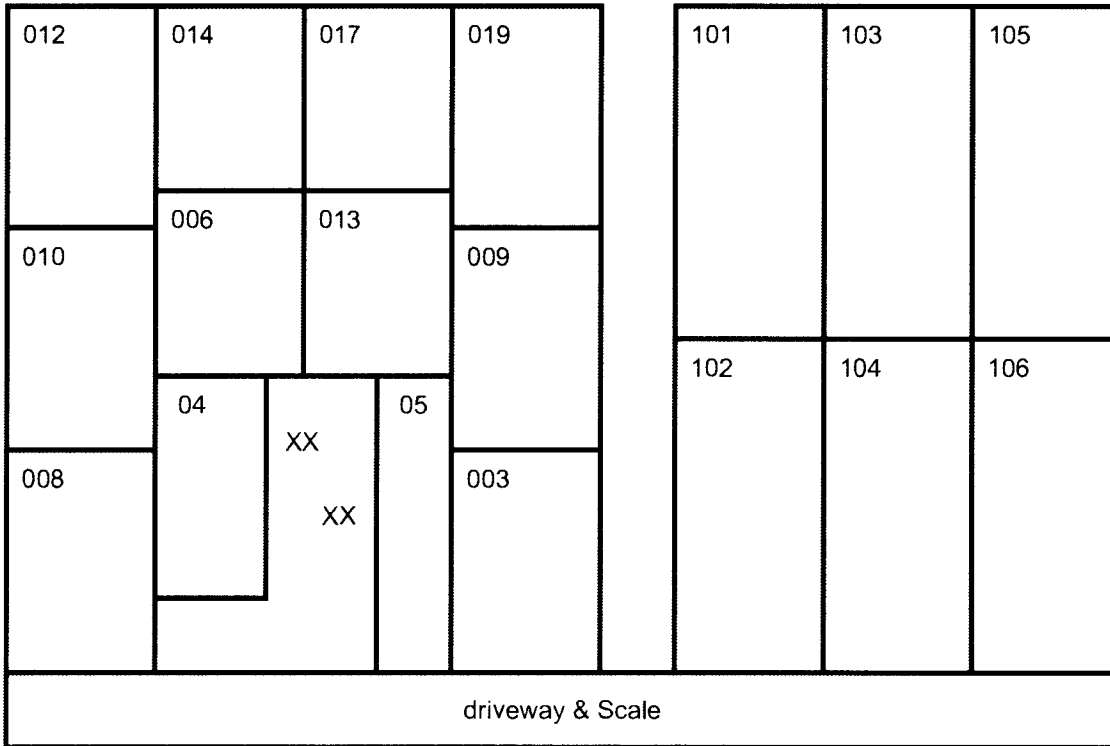

SECTION D

# Renville Elevator Company

## Tolley, North Dakota

