

Exam Date: 11/25/2013

Wilton Farmers Union Elevator Co.

Page: 1

Examiner: 1

Box 188

Wilton, ND

County:

Phone: 701-734-6780

CCC Number:

Location/Container Numbers/Comments	Section	Capacity
<b>PART A - ADDITIONAL SPACE TO BE INCLUDED UNDER LICENSE</b>		
307.	A	97,954
308	A	97,954
	<b>Total:</b>	<b>195,908</b>
<b>PART B - SPACE TO BE DELETED UNDER LICENSE</b>		
300-ground	G	99,920
	<b>Total:</b>	<b>99,920</b>
<b>PART C - ALL SPACE TO BE INCLUDED UNDER LICENSE</b>		
	A	951,000
	C	146,000
	D	487,000
	E	45,000
	G	226,000
	<b>Total:</b>	<b>1,855,000</b>
<b>PART D - TOTAL CAPACITY BY FUNCTIONAL UNIT</b>		
Regan 751	D E	532,000
Washburn 846	G	226,000
Wilton 59	A C	1,097,000
	<b>Total:</b>	<b>1,855,000</b>

Exam Date: 11/25/2013

Wilton Farmers Union Elevator Co.

Page: 1

Examiner: 1

Box 188  
Wilton , ND  
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg).		Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
					Length	Width									

## Facility: Regan

### Section: D

D	001	Square	work floor		0.000	8.000	6.800	56.00	0.00	0.00	56.000	0.000	56.0	43.7	3.50	2,533
D	002	Square	work floor		0.000	8.000	6.800	56.00	0.00	0.00	56.000	0.000	56.0	43.7	3.50	2,533
D	003	Square	work floor		0.000	8.000	7.900	56.00	0.00	0.00	56.000	0.000	56.0	50.8	4.50	2,973
D	004	Square	work floor		0.000	8.000	7.900	56.00	0.00	0.00	56.000	0.000	56.0	50.8	4.50	2,973
D	005	Square	work floor		0.000	8.000	7.900	56.00	0.00	0.00	56.000	0.000	56.0	50.8	4.50	2,973
D	006	Square	work floor		0.000	8.000	7.900	56.00	0.00	0.00	56.000	0.000	56.0	50.8	4.50	2,973
D	008 T	Square	work floor		0.000	8.600	16.10	58.00	0.00	0.00	58.000	0.000	58.0	111.3	6.20	6,855
D	008B	Square	work floor T58'		0.000	7.200	14.90	17.00	0.00	0.00	17.000	0.000	17.0	86.2	5.80	1,550
D	009	Square	work floor		0.000	5.800	7.900	53.00	0.00	0.00	53.000	0.000	53.0	36.8	3.00	2,009
D	010	Square	work floor		0.000	12.00	7.900	56.00	0.00	0.00	56.000	0.000	56.0	76.2	5.50	4,502
D	011	Square	work floor		0.000	5.800	6.800	56.00	0.00	0.00	56.000	0.000	56.0	31.7	2.50	1,819
D	012 T	Square	work floor		0.000	8.600	16.10	58.00	0.00	0.00	58.000	0.000	58.0	111.3	6.20	6,855
D	012B	Square	work floor T58'		0.000	7.200	14.90	17.00	0.00	0.00	17.000	0.000	17.0	86.2	5.80	1,550
D	013	Irregular	work floor less 7 bpf for		40.000	7.054	7.054	56.00	0.00	0.00	56.000	0.000	56.0	40.0	3.00	2,307
D	014	Square	work floor		0.000	8.600	2.000	56.00	0.00	0.00	56.000	0.000	56.0	13.8	2.00	788
D	016	Irregular	work floor less 7.0 bpf for		40.000	7.054	7.054	56.00	0.00	0.00	56.000	0.000	56.0	40.0	3.00	2,307
D	017 T	Square	work floor		0.000	8.600	16.10	58.00	0.00	0.00	58.000	0.000	58.0	111.3	6.20	6,855
D	017B	Square	work floor T58'		0.000	7.200	14.90	17.00	0.00	0.00	17.000	0.000	17.0	86.2	5.80	1,550
D	018	Square	work floor		0.000	5.800	10.70	56.00	0.00	0.00	56.000	0.000	56.0	49.9	4.20	2,911
D	019	Square	work floor		0.000	5.800	6.800	56.00	0.00	0.00	56.000	0.000	56.0	31.7	2.50	1,819
D	020	Square	work floor		0.000	5.800	10.70	56.00	0.00	0.00	56.000	0.000	56.0	49.9	4.20	2,911

Exam Date: 11/25/2013

Wilton Farmers Union Elevator Co.

Page: 2

Examiner: 1

Box 188  
Wilton, ND  
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg).		Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
					Length	Width									

## Facility: Regan

### Section: D

D	021	Square	work floor		0.000	3.700	5.000	46.00	0.00	0.00	46.000	0.000	46.0	14.9	2.00	699
D	022	Square	work floor		0.000	3.700	5.000	46.00	0.00	0.00	46.000	0.000	46.0	14.9	2.00	699
D	023	Square	work floor		0.000	8.600	3.000	56.00	0.00	0.00	56.000	0.000	56.0	20.7	2.00	1,182
D	024 T	Square	work floor		0.000	8.600	16.10	58.00	0.00	0.00	58.000	0.000	58.0	111.3	6.20	6,855
D	024B	Square	work floor T58'		0.000	7.200	14.90	17.00	0.00	0.00	17.000	0.000	17.0	86.2	5.80	1,550
D	025	Square	work floor		0.000	3.700	5.000	46.00	0.00	0.00	46.000	0.000	46.0	14.9	2.00	699
D	026	Square	work floor		0.000	8.000	7.900	56.00	0.00	0.00	56.000	0.000	56.0	50.8	4.50	2,973
D	027	Square	work floor		0.000	8.000	7.900	56.00	0.00	0.00	56.000	0.000	56.0	50.8	4.50	2,973
D	028	Square	work floor		0.000	8.000	7.900	56.00	0.00	0.00	56.000	0.000	56.0	50.8	4.50	2,973
D	029	Square	work floor		0.000	8.000	7.900	56.00	0.00	0.00	56.000	0.000	56.0	50.8	4.50	2,973
D	030	Square	work floor		0.000	8.000	6.800	56.00	0.00	0.00	56.000	0.000	56.0	43.7	3.50	2,533
D	031	Square	work floor		0.000	5.800	6.800	56.00	0.00	0.00	56.000	0.000	56.0	31.7	2.50	1,819
D	032	Square	work floor		0.000	8.000	6.800	56.00	0.00	0.00	56.000	0.000	56.0	43.7	3.50	2,533
D	033	Square	work floor		0.000	5.800	6.800	56.00	0.00	0.00	56.000	0.000	56.0	31.7	2.50	1,819
D	101 T	Square	work floor		0.000	3.600	14.40	26.00	0.00	0.00	26.000	0.000	26.0	41.7	3.50	1,122
D	101 M	Square	work floor T26'		0.000	14.80	14.40	40.00	0.00	0.00	40.000	0.000	40.0	171.3	7.00	7,332
D	101B	Square	work floor T26' M40'		0.000	12.40	14.40	9.000	0.00	0.00	9.000	0.000	9.0	143.5	6.80	1,380
D	102 T	Square	work floor		0.000	14.80	14.40	66.00	0.00	0.00	66.000	0.000	66.0	171.3	7.00	12,097
D	102B	Square	work floor T66'		0.000	12.40	14.40	9.000	0.00	0.00	9.000	0.000	9.0	143.5	6.80	1,380
D	103 T	Square	work floor		0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D	103B	Square	work floor T66'		0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399

Exam Date: 11/25/2013

Wilton Farmers Union Elevator Co.

Page: 3

Examiner: 1

Box 188  
Wilton, ND  
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg).		Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
					Length	Width									

## Facility: Regan

### Section: D

D	104 T	Square	work floor		0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D	104B	Square	work floor T66'		0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399
D	105 T	Square	work floor		0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D	105B	Square	work floor		0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399
D	106 T	Square	work floor		0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D	106B	Square	work floor T66'		0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399
D	107 T	Square	work floor		0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D	107B	Square	work floor T66'		0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399
D	108 T	Square	work floor		0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D	108B	Square	work floor T66'		0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399
D	109 T	Square	work floor		0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D	109B	Square	work floor T66'		0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399
D	110 T	Square	work floor		0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D	110B	Square	work floor T66'		0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399
D	111 T	Square	work floor		0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D	111B	Square	work floor T66'		0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399
D	112 T	Square	work floor		0.000	14.80	14.60	66.00	0.00	0.00	66.000	0.000	66.0	173.7	7.00	12,266
D	112B	Square	work floor T66'		0.000	12.40	14.60	9.000	0.00	0.00	9.000	0.000	9.0	145.5	6.80	1,399
D	113 T	Square	work floor		0.000	14.80	14.40	66.00	0.00	0.00	66.000	0.000	66.0	171.3	7.00	12,097
D	113B	Square	work floor T66'		0.000	12.40	14.40	9.000	0.00	0.00	9.000	0.000	9.0	143.5	6.80	1,380
D	114 T	Square	work floor		0.000	14.80	14.40	66.00	0.00	0.00	66.000	0.000	66.0	171.3	7.00	12,097

Exam Date: 11/25/2013

Wilton Farmers Union Elevator Co.

Page: 4

Examiner: 1

Box 188  
Wilton, ND  
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	-------------------------------	--------	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

## Facility: Regan

### Section: D

D	114B	Square	work floor T66'		0.000	12.40	14.40	9.000	0.00	0.00	9.000	0.000	9.0	143.5	6.80	1,380
D	116	Square	work floor		0.000	10.80	4.800	25.00	0.00	0.00	25.000	0.000	25.0	41.7	3.50	1,080
D	117	Square	work floor		0.000	10.80	4.400	25.00	0.00	0.00	25.000	0.000	25.0	38.2	3.00	984
D	118	Square	work floor		0.000	10.80	4.400	25.00	0.00	0.00	25.000	0.000	25.0	38.2	3.00	984
D	201	Square	work floor		0.000	6.000	11.30	46.50	0.00	0.00	46.500	0.000	46.5	54.5	4.50	2,648
D	202	Square	work floor		0.000	11.50	11.30	56.00	0.00	0.00	56.000	0.000	56.0	104.5	6.00	6,203
D	203	Square	work floor		0.000	11.50	11.70	56.00	0.00	0.00	56.000	0.000	56.0	108.2	6.20	6,435
D	204	Square	work floor		0.000	11.50	11.30	56.00	0.00	0.00	56.000	0.000	56.0	104.5	6.00	6,203
D	205	Square	work floor		0.000	6.000	11.30	46.50	0.00	0.00	46.500	0.000	46.5	54.5	4.50	2,648
D	206	Square	work floor		0.000	11.50	11.30	56.00	0.00	0.00	56.000	0.000	56.0	104.5	6.00	6,203
D	207	Square	work floor		0.000	6.000	11.70	46.50	0.00	0.00	46.500	0.000	46.5	56.4	4.80	2,749
D	208	Square	work floor		0.000	11.50	11.70	56.00	0.00	0.00	56.000	0.000	56.0	108.2	6.20	6,435
D	209	Square	work floor		0.000	11.50	11.30	56.00	0.00	0.00	56.000	0.000	56.0	104.5	6.00	6,203
D	301	Peaked	top of sidewall		30.000	0.000	0.000	46.00	0.00	0.00	46.000	1.800	47.8	568.2	9.00	29,604
D	302	Peaked	top of sidewall		30.000	0.000	0.000	46.00	0.00	0.00	46.000	1.800	47.8	568.2	9.00	29,604
D	303	Peaked	top of sidewall		30.000	0.000	0.000	46.00	0.00	0.00	46.000	1.800	47.8	568.2	9.00	29,604
D	304	Peaked	top of sidewall		30.000	0.000	0.000	46.00	0.00	0.00	46.000	1.800	47.8	568.2	9.00	29,604
D	305	Peaked	top of sidewall		33.000	0.000	0.000	46.00	0.00	0.00	46.000	2.000	48.0	687.5	9.50	36,135

Bin count: 81

Facility: Regan Section: D Total: **486,067**

To Even: **487,000**

Exam Date: 11/25/2013

Wilton Farmers Union Elevator Co.

Page: 5

Examiner: 1

Box 188  
Wilton, ND  
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	-------------------------------	--------	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

## Facility: Regan

### Section: E

E	001		Irregular	work floor	14.500	4.247	4.247	15.00	0.00	0.00	15.000	0.000	15.0	14.5	2.00	222
E	003		Irregular	work floor	68.100	9.204	9.204	58.00	0.00	0.00	58.000	0.000	58.0	68.1	5.20	4,155
E	004 T		Irregular	work floor	21.700	5.196	5.196	15.00	0.00	0.00	15.000	0.000	15.0	21.7	2.00	333
E	004 B		Irregular	work floor-= top 15'	39.800	7.036	7.036	25.00	0.00	0.00	25.000	0.000	25.0	39.8	3.00	1,025
E	005		Irregular	work floor	38.600	6.930	6.930	41.00	0.00	0.00	41.000	0.000	41.0	38.6	3.00	1,630
E	006		Irregular	work floor	67.200	9.143	9.143	58.00	0.00	0.00	58.000	0.000	58.0	67.2	5.20	4,101
E	007		Irregular	work floor	46.400	7.597	7.597	58.00	0.00	0.00	58.000	0.000	58.0	46.4	4.00	2,799
E	008		Irregular	work floor	45.800	7.548	7.548	58.00	0.00	0.00	58.000	0.000	58.0	45.8	4.00	2,762
E	010		Irregular	work floor	38.600	6.930	6.930	41.00	0.00	0.00	41.000	0.000	41.0	38.6	3.00	1,630
E	011		Irregular	work floor	45.200	7.499	7.499	58.00	0.00	0.00	58.000	0.000	58.0	45.2	4.00	2,727
E	012		Irregular	work floor	44.600	7.449	7.449	58.00	0.00	0.00	58.000	0.000	58.0	44.6	3.50	2,678
E	013		Irregular	work floor	37.600	6.839	6.839	39.00	0.00	0.00	39.000	0.000	39.0	37.6	3.00	1,510
E	014		Irregular	work floor	37.600	6.839	6.839	39.00	0.00	0.00	39.000	0.000	39.0	37.6	3.00	1,510
E	017		Irregular	work floor	45.200	7.499	7.499	58.00	0.00	0.00	58.000	0.000	58.0	45.2	4.00	2,727
E	018		Irregular	work floor	44.600	7.449	7.449	58.00	0.00	0.00	58.000	0.000	58.0	44.6	3.50	2,678
E	019		Irregular	work floor	37.600	6.839	6.839	39.00	0.00	0.00	39.000	0.000	39.0	37.6	3.00	1,510
E	020		Irregular	work floor	37.600	6.839	6.839	39.00	0.00	0.00	39.000	0.000	39.0	37.6	3.00	1,510
E	201		Peaked	top of sidewall	21.000	0.000	0.000	29.00	0.00	0.00	29.000	1.300	30.3	278.4	6.80	9,010

Bin count: 18

Facility: Regan Section: E Total: **44,517**To Even: **45,000**

Exam Date:11/25/2013

Wilton Farmers Union Elevator Co.

Page: 6

Examiner: 1

Box 188  
Wilton , ND  
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg).	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	-------------------------------	--------	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

## Facility: Washburn

### Section: G

G	000TB	Square	work floor		0.000	4.900	8.200	10.00	0.00	0.00	10.000	0.000	10.0	32.3	2.50	331
G	002	Square	work floor		0.000	4.600	7.000	50.00	0.00	0.00	50.000	0.000	50.0	25.9	2.50	1,327
G	003	Square	work floor		0.000	9.300	3.400	48.00	0.00	0.00	48.000	0.000	48.0	25.4	2.50	1,249
G	004	Square	work floor		0.000	9.300	11.20	66.00	0.00	0.00	66.000	0.000	66.0	83.7	5.80	5,844
G	005	Square	work floor		0.000	10.00	5.700	49.00	0.00	0.00	49.000	0.000	49.0	45.8	4.00	2,334
G	006 T	Square	work floor		0.000	10.00	5.100	49.00	0.00	0.00	49.000	0.000	49.0	41.0	3.00	2,069
G	006B	Square	work floor T49'		0.000	10.00	11.20	17.00	0.00	0.00	17.000	0.000	17.0	90.0	5.80	1,619
G	008	Square	work floor		0.000	9.400	11.20	66.00	0.00	0.00	66.000	0.000	66.0	84.6	5.80	5,908
G	009 T	Square	work floor		0.000	5.100	6.700	12.00	0.00	0.00	12.000	0.000	12.0	27.5	2.50	338
G	009B	Square	work floor T12'		0.000	5.100	6.700	38.00	0.00	0.00	38.000	0.000	38.0	27.5	2.50	1,071
G	010	Square	work floor		0.000	9.400	6.700	49.00	0.00	0.00	49.000	0.000	49.0	50.6	4.50	2,591
G	013	Square	work floor		0.000	9.400	7.000	49.00	0.00	0.00	49.000	0.000	49.0	52.9	4.50	2,709
G	014	Square	work floor		0.000	4.600	6.700	50.00	0.00	0.00	50.000	0.000	50.0	24.8	2.50	1,271
G	015	Square	work floor		0.000	9.400	11.20	66.00	0.00	0.00	66.000	0.000	66.0	84.6	5.80	5,908
G	016	Square	work floor		0.000	10.00	5.700	49.00	0.00	0.00	49.000	0.000	49.0	45.8	4.00	2,334
G	018 T	Irregular	work floor		5.300	2.568	2.568	12.00	0.00	0.00	12.000	0.000	12.0	5.3	2.00	65
G	018B	Square	work floor T12'		0.000	5.100	7.000	38.00	0.00	0.00	38.000	0.000	38.0	28.7	2.50	1,118
G	019	Square	work floor		0.000	10.00	5.100	49.00	0.00	0.00	49.000	0.000	49.0	41.0	3.00	2,069
G	020	Square	work floor		0.000	4.700	5.100	48.00	0.00	0.00	48.000	0.000	48.0	19.3	2.00	945
G	021 T	Square	work floor		0.000	4.700	5.700	48.00	0.00	0.00	48.000	0.000	48.0	21.5	2.00	1,053
G	021B	Square	work floor T48'		0.000	9.300	11.20	18.00	0.00	0.00	18.000	0.000	18.0	83.7	5.80	1,594

Exam Date: 11/25/2013

Wilton Farmers Union Elevator Co.

Page: 7

Examiner: 1

Box 188  
Wilton, ND  
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	-------------------------------	--------	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

## Facility: Washburn

### Section: G

G	023	Square	work floor		0.000	4.300	5.100	48.00	0.00	0.00	48.000	0.000	48.0	17.6	2.00	862
G	024	Square	work floor		0.000	4.300	5.700	48.00	0.00	0.00	48.000	0.000	48.0	19.7	2.00	965
G	025	Square	work floor		0.000	9.300	3.400	48.00	0.00	0.00	48.000	0.000	48.0	25.4	2.50	1,249
G	102	Square	work floor		0.000	9.500	5.000	25.00	0.00	0.00	25.000	0.000	25.0	38.2	3.00	984
G	104	Square	work floor		0.000	9.700	5.500	28.00	0.00	0.00	28.000	0.000	28.0	42.9	3.50	1,243
G	105	Square	work floor		0.000	9.500	8.200	42.00	0.00	0.00	42.000	0.000	42.0	62.6	5.00	2,760
G	106	Square	work floor		0.000	9.700	5.500	28.00	0.00	0.00	28.000	0.000	28.0	42.9	3.50	1,243
G	107	Square	work floor		0.000	9.700	8.200	42.00	0.00	0.00	42.000	0.000	42.0	63.9	5.00	2,818
G	108 T	Square	work floor		0.000	4.500	8.200	10.00	0.00	0.00	10.000	0.000	10.0	29.7	2.50	304
G	108B	Square	work floor T10'		0.000	9.500	8.200	32.00	0.00	0.00	32.000	0.000	32.0	62.6	5.00	2,103
G	109	Square	work floor		0.000	9.400	8.200	42.00	0.00	0.00	42.000	0.000	42.0	62.0	4.80	2,729
G	111	Square	work floor		0.000	9.400	5.500	25.00	0.00	0.00	25.000	0.000	25.0	41.6	3.50	1,076
G	112	Square	work floor		0.000	9.400	8.200	42.00	0.00	0.00	42.000	0.000	42.0	62.0	4.80	2,729
G	114	Square	work floor		0.000	9.400	5.500	25.00	0.00	0.00	25.000	0.000	25.0	41.6	3.50	1,076
G	115	Square	work floor		0.000	9.700	8.200	42.00	0.00	0.00	42.000	0.000	42.0	63.9	5.00	2,818
G	201	Peaked	top of sidewall		30.000	0.000	0.000	49.50	0.00	0.00	49.500	1.800	51.3	568.2	9.00	31,772
G	202	Peaked	top of sidewall		30.000	0.000	0.000	49.50	0.00	0.00	49.500	1.800	51.3	568.2	9.00	31,772
G	203	Peaked	top of sidewall		13.500	0.000	0.000	23.00	0.00	0.00	23.000	0.800	23.8	115.1	5.20	2,881
G	204	Peaked	top of sidewall		30.000	0.000	0.000	23.00	0.00	0.00	23.000	1.800	24.8	568.2	9.00	15,359
G	401	Peaked	top of sidewall		30.000	0.000	0.000	58.50	0.00	0.00	58.500	1.800	60.3	568.2	9.00	37,346
G	402	Peaked	top of sidewall		30.000	0.000	0.000	58.50	0.00	0.00	58.500	1.800	60.3	568.2	9.00	37,346

Exam Date: 11/25/2013

Wilton Farmers Union Elevator Co.

Page: 8

Examiner: 1

Box 188  
Wilton, ND  
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	-------------------------------	--------	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

**Bin count: 42**

**Facility: Washburn Section: G Total: 225,182**

**To Even: 226,000**

Exam Date: 11/25/2013

Wilton Farmers Union Elevator Co.

Page: 9

Examiner: 1

Box 188  
Wilton, ND  
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	-------------------------------	--------	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

## Facility: Wilton

### Section: A

A	000CB	Square	work floor		0.000	2.800	4.000	54.00	0.00	0.00	54.000	0.000	54.0	9.0	2.00	496
A	001	Square	work floor		0.000	3.900	3.000	53.00	0.00	0.00	53.000	0.000	53.0	9.4	2.00	508
A	002	Square	work floor		0.000	8.000	4.000	54.00	0.00	0.00	54.000	0.000	54.0	25.7	2.50	1,423
A	003	Square	work floor		0.000	12.00	5.200	56.00	0.00	0.00	56.000	0.000	56.0	50.2	4.50	2,937
A	004 T	Square	work floor		0.000	11.20	10.80	53.00	0.00	0.00	53.000	0.000	53.0	97.2	6.00	5,461
A	004B	Square	work floor	T53'	0.000	10.40	10.20	20.00	0.00	0.00	20.000	0.000	20.0	85.3	5.80	1,805
A	005 T	Square	work floor		0.000	13.20	9.800	65.00	0.00	0.00	65.000	0.000	65.0	104.0	6.00	7,166
A	005B	Square	work floor	T65'	0.000	14.00	9.600	8.000	0.00	0.00	8.000	0.000	8.0	108.0	6.20	918
A	006 T	Square	work floor		0.000	8.200	6.400	53.00	0.00	0.00	53.000	0.000	53.0	42.2	3.50	2,315
A	006B	Square	work floor	T53'	0.000	8.200	9.800	10.00	0.00	0.00	10.000	0.000	10.0	64.6	5.00	678
A	007	Square	work floor		0.000	12.00	5.200	56.00	0.00	0.00	56.000	0.000	56.0	50.2	4.50	2,937
A	008	Square	work floor		0.000	3.900	3.000	53.00	0.00	0.00	53.000	0.000	53.0	9.4	2.00	508
A	009 T	Square	work floor		0.000	13.20	9.800	65.00	0.00	0.00	65.000	0.000	65.0	104.0	6.00	7,166
A	009B	Square	work floor	T65'	0.000	14.00	9.600	8.000	0.00	0.00	8.000	0.000	8.0	108.0	6.20	918
A	010	Square	work floor		0.000	12.00	6.800	54.00	0.00	0.00	54.000	0.000	54.0	65.6	5.00	3,719
A	011 T	Square	work floor		0.000	11.20	10.80	53.00	0.00	0.00	53.000	0.000	53.0	97.2	6.00	5,461
A	011B	Square	work floor	T53'	0.000	10.40	10.20	20.00	0.00	0.00	20.000	0.000	20.0	85.3	5.80	1,805
A	013 T	Square	work floor		0.000	2.500	6.800	22.00	0.00	0.00	22.000	0.000	22.0	13.7	2.00	307
A	013B	Square	work floor	T22'	0.000	11.20	6.800	30.00	0.00	0.00	30.000	0.000	30.0	61.2	4.80	1,924
A	014	Square	work floor		0.000	11.20	6.800	52.00	0.00	0.00	52.000	0.000	52.0	61.2	4.80	3,335
A	015 T	Square	work floor		0.000	13.20	9.600	64.00	0.00	0.00	64.000	0.000	64.0	101.9	6.00	6,913

Exam Date: 11/25/2013

Wilton Farmers Union Elevator Co.

Page: 10

Examiner: 1

Box 188  
Wilton, ND  
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	-------------------------------	--------	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

## Facility: Wilton

### Section: A

A	015B	Square	work floor T64		0.000	14.00	9.100	7.000	0.00	0.00	7.000	0.000	7.0	102.4	6.00	760
A	016	Square	work floor		0.000	12.00	6.800	54.00	0.00	0.00	54.000	0.000	54.0	65.6	5.00	3,719
A	018	Square	work floor		0.000	8.200	9.600	64.00	0.00	0.00	64.000	0.000	64.0	63.3	5.00	4,254
A	020 T	Square	work floor		0.000	7.200	9.600	54.00	0.00	0.00	54.000	0.000	54.0	55.6	4.80	3,146
A	020 M	Square	work floor T54'		0.000	13.20	9.600	10.00	0.00	0.00	10.000	0.000	10.0	101.9	6.00	1,080
A	020B	Square	work floor T54' M10		0.000	14.00	9.100	7.000	0.00	0.00	7.000	0.000	7.0	102.4	6.00	760
A	021 T	Square	work floor		0.000	13.20	9.600	64.00	0.00	0.00	64.000	0.000	64.0	101.9	6.00	6,913
A	021B	Square	work floor T64'		0.000	14.00	9.600	7.000	0.00	0.00	7.000	0.000	7.0	108.0	6.20	803
A	022	Square	work floor		0.000	5.600	4.600	54.00	0.00	0.00	54.000	0.000	54.0	20.7	2.00	1,140
A	023	Square	work floor		0.000	5.600	4.600	54.00	0.00	0.00	54.000	0.000	54.0	20.7	2.00	1,140
A	024	Square	work floor		0.000	11.20	4.000	52.00	0.00	0.00	52.000	0.000	52.0	36.0	3.00	1,928
A	024A	Square	work floor		0.000	8.200	9.600	64.00	0.00	0.00	64.000	0.000	64.0	63.3	5.00	4,254
A	025 T	Square	work floor		0.000	13.20	9.600	64.00	0.00	0.00	64.000	0.000	64.0	101.9	6.00	6,913
A	025B	Square	work floor T64'		0.000	14.00	9.500	7.000	0.00	0.00	7.000	0.000	7.0	106.9	6.20	794
A	026 T	Square	work floor		0.000	13.20	9.600	64.00	0.00	0.00	64.000	0.000	64.0	101.9	6.00	6,913
A	026B	Square	work floor T64'		0.000	14.00	9.500	7.000	0.00	0.00	7.000	0.000	7.0	106.9	6.20	794
A	027 T	Square	work floor		0.000	13.20	9.600	64.00	0.00	0.00	64.000	0.000	64.0	101.9	6.00	6,913
A	027B	Square	work floor T64'		0.000	14.00	9.600	7.000	0.00	0.00	7.000	0.000	7.0	108.0	6.20	803
A	028	Square	work floor		0.000	8.200	9.600	64.00	0.00	0.00	64.000	0.000	64.0	63.3	5.00	4,254
A	031 T	Square	work floor		0.000	17.20	15.40	61.00	0.00	0.00	61.000	0.000	61.0	212.9	7.00	13,896
A	031B	Square	work floor		0.000	15.00	15.40	9.000	0.00	0.00	9.000	0.000	9.0	185.7	7.00	1,788

Exam Date: 11/25/2013

Wilton Farmers Union Elevator Co.

Page: 11

Examiner: 1

Box 188  
Wilton, ND  
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg).		Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
					Length	Width									

## Facility: Wilton

### Section: A

A	032 T	Square	work floor		0.000	17.20	15.40	61.00	0.00	0.00	61.000	0.000	61.0	212.9	7.00	13,896
A	032B	Square	work floor T61'		0.000	15.00	15.40	9.000	0.00	0.00	9.000	0.000	9.0	185.7	7.00	1,788
A	033 T	Square	work floor		0.000	17.20	15.50	61.00	0.00	0.00	61.000	0.000	61.0	214.3	7.00	13,987
A	033B	Square	work floor T61'		0.000	15.00	15.50	9.000	0.00	0.00	9.000	0.000	9.0	186.9	7.00	1,800
A	034 T	Square	work floor		0.000	17.20	15.50	61.00	0.00	0.00	61.000	0.000	61.0	214.3	7.00	13,987
A	034B	Square	work floor T61'		0.000	15.00	15.50	9.000	0.00	0.00	9.000	0.000	9.0	186.9	7.00	1,800
A	035 T	Square	work floor		0.000	17.20	15.60	61.00	0.00	0.00	61.000	0.000	61.0	215.7	7.00	14,079
A	035B	Square	work floor T61'		0.000	15.00	15.60	9.000	0.00	0.00	9.000	0.000	9.0	188.1	7.00	1,812
A	036 T	Square	work floor		0.000	17.20	15.60	61.00	0.00	0.00	61.000	0.000	61.0	215.7	7.00	14,079
A	036B	Square	work floor T61'		0.000	15.00	15.60	9.000	0.00	0.00	9.000	0.000	9.0	188.1	7.00	1,812
A	037 T	Square	work floor		0.000	17.20	15.50	61.00	0.00	0.00	61.000	0.000	61.0	214.3	7.00	13,987
A	037B	Square	work floor T61'		0.000	15.00	15.50	9.000	0.00	0.00	9.000	0.000	9.0	186.9	7.00	1,800
A	038 T	Square	work floor		0.000	17.20	15.50	61.00	0.00	0.00	61.000	0.000	61.0	214.3	7.00	13,987
A	038B	Square	work floor T61'		0.000	15.00	15.50	9.000	0.00	0.00	9.000	0.000	9.0	186.9	7.00	1,800
A	039 T	Square	work floor		0.000	17.20	15.40	61.00	0.00	0.00	61.000	0.000	61.0	212.9	7.00	13,896
A	039B	Square	work floor T61'		0.000	15.00	15.40	9.000	0.00	0.00	9.000	0.000	9.0	185.7	7.00	1,788
A	040 T	Square	work floor		0.000	17.20	15.40	61.00	0.00	0.00	61.000	0.000	61.0	212.9	7.00	13,896
A	040B	Square	work floor T61'		0.000	15.00	15.40	9.000	0.00	0.00	9.000	0.000	9.0	185.7	7.00	1,788
A	301	Peaked	top side wall		36.000	0.000	0.000	61.50	0.00	0.00	61.500	2.200	63.7	818.2	10.0	57,331
A	302	Peaked	top side wall		42.000	0.000	0.000	61.50	0.00	0.00	61.500	2.500	64.0	1113.7	10.0	78,405
A	303	Peaked	top side wall		48.000	0.000	0.000	61.30	0.00	0.00	61.300	3.400	64.7	1454.6	10.0	103,524

Exam Date: 11/25/2013

Wilton Farmers Union Elevator Co.

Page: 12

Examiner: 1

Box 188  
Wilton, ND  
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	-------------------------------	--------	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

## Facility: Wilton

### Section: A

	A	304	Peaked	top side wall	54.000	0.000	0.000	61.30	0.00	0.00	61.300	3.800	65.1	1841.0	10.0	131,834	
	A	305	Peaked	top side wall	36.000	0.000	0.000	58.75	0.00	0.00	58.750	2.200	61.0	818.2	10.0	54,901	
	A	306	Peaked	top side wall	36.000	0.000	0.000	58.75	0.00	0.00	58.750	2.200	61.0	818.2	10.0	54,901	
Added	A	307	Peaked	top side wall	47.850	0.000	0.000	58.70	0.00	0.00	58.700	2.900	61.6	1445.6	10.0	97,954	
Added	A	308	Peaked	top side wall	47.850	0.000	0.000	58.70	0.00	0.00	58.700	2.900	61.6	1445.6	10.0	97,954	
<b>Bin count:</b>		<b>68</b>														<b>Facility: Wilton Section: A Total:</b>	<b>950,451</b>

To Even: **951,000**

### Section: C

	C	002	Square	work floor	0.000	9.400	3.400	36.00	0.00	0.00	36.000	0.000	36.0	25.7	2.50	948
	C	004 T	Square	work floor	0.000	9.400	3.000	36.00	0.00	0.00	36.000	0.000	36.0	22.7	2.00	833
	C	004B	Square	work floor T36'	0.000	9.400	9.200	16.50	0.00	0.00	16.500	0.000	16.5	69.5	5.20	1,207
	C	006	Square	work floor	0.000	9.400	5.800	36.00	0.00	0.00	36.000	0.000	36.0	43.8	3.50	1,632
	C	007	Square	work floor	0.000	9.700	5.800	32.50	0.00	0.00	32.500	0.000	32.5	45.2	4.00	1,528
	C	008	Square	top of cribbing	0.000	9.700	9.200	22.00	0.00	0.00	22.000	0.000	22.0	71.7	5.20	1,659
	C	009	Square	top of cribbing	0.000	9.700	6.400	36.00	0.00	0.00	36.000	0.000	36.0	49.9	4.20	1,871
	C	010 T	Square	top of cribbing	0.000	9.400	3.000	36.00	0.00	0.00	36.000	0.000	36.0	22.7	2.00	833
	C	010B	Square	top of cribbing	0.000	9.400	9.200	16.50	0.00	0.00	16.500	0.000	16.5	69.5	5.20	1,207
	C	011	Square	top of cribbing	0.000	9.400	5.800	36.00	0.00	0.00	36.000	0.000	36.0	43.8	3.50	1,632
	C	012	Square	top of cribbing	0.000	9.400	6.400	35.00	0.00	0.00	35.000	0.000	35.0	48.4	4.20	1,765

Exam Date: 11/25/2013

Wilton Farmers Union Elevator Co.

Page: 13

Examiner: 1

Box 188  
Wilton, ND  
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg).		Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
					Length	Width									

## Facility: Wilton

### Section: C

C	013	Square	work floor		0.000	9.400	6.400	35.00	0.00	0.00	35.000	0.000	35.0	48.4	4.20	1,765
C	014	Square	work floor		0.000	9.400	5.800	36.00	0.00	0.00	36.000	0.000	36.0	43.8	3.50	1,632
C	015 T	Square	top of cribbing		0.000	9.400	3.000	36.00	0.00	0.00	36.000	0.000	36.0	22.7	2.00	833
C	015B	Square	top of cribbing		0.000	9.400	9.200	16.50	0.00	0.00	16.500	0.000	16.5	69.5	5.20	1,207
C	016	Square	work floor		0.000	9.700	5.800	36.00	0.00	0.00	36.000	0.000	36.0	45.2	4.00	1,692
C	017 T	Square	top of cribbing		0.000	9.700	3.000	36.00	0.00	0.00	36.000	0.000	36.0	23.4	2.00	859
C	017B	Square	top of cribbing		0.000	9.700	9.200	16.50	0.00	0.00	16.500	0.000	16.5	71.7	5.20	1,245
C	020	Square	work floor		0.000	9.700	6.400	36.00	0.00	0.00	36.000	0.000	36.0	49.9	4.20	1,871
C	021	Square	work floor		0.000	4.500	3.400	36.00	0.00	0.00	36.000	0.000	36.0	12.3	2.00	452
C	023 A	Square	work floor		0.000	9.400	5.800	36.00	0.00	0.00	36.000	0.000	36.0	43.8	3.50	1,632
C	023 T	Square	top of cribbing		0.000	9.400	3.000	36.00	0.00	0.00	36.000	0.000	36.0	22.7	2.00	833
C	023B	Square	top of cribbing-top 36'		0.000	9.400	9.200	16.50	0.00	0.00	16.500	0.000	16.5	69.5	5.20	1,207
C	101	Square	catwalk		0.000	14.40	5.500	32.00	0.00	0.00	32.000	0.000	32.0	63.7	5.00	2,140
C	102	Square	catwalk		0.000	14.40	5.500	32.00	0.00	0.00	32.000	0.000	32.0	63.7	5.00	2,140
C	103 T	Square	catwalk		0.000	14.40	11.60	44.00	0.00	0.00	44.000	0.000	44.0	134.3	6.50	6,293
C	103B	Square	catwalk T44'		0.000	12.00	11.60	10.00	0.00	0.00	10.000	0.000	10.0	111.9	6.20	1,188
C	104 T	Square	catwalk		0.000	14.40	11.60	44.00	0.00	0.00	44.000	0.000	44.0	134.3	6.50	6,293
C	104B	Square	catwalk T44'		0.000	12.00	11.60	10.00	0.00	0.00	10.000	0.000	10.0	111.9	6.20	1,188
C	105 T	Square	catwalk		0.000	14.40	11.40	44.00	0.00	0.00	44.000	0.000	44.0	132.0	6.50	6,186
C	105B	Square	catwalk T44'		0.000	12.00	11.40	10.00	0.00	0.00	10.000	0.000	10.0	110.0	6.20	1,168
C	106 T	Square	catwalk		0.000	14.40	11.40	44.00	0.00	0.00	44.000	0.000	44.0	132.0	6.50	6,186

Exam Date: 11/25/2013

Wilton Farmers Union Elevator Co.

Page: 14

Examiner: 1

Box 188  
Wilton, ND  
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)		Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
					Length	Width									

## Facility: Wilton

### Section: C

C	106B	Square	catwalk T44'	0.000	12.00	11.40	10.00	0.00	0.00	10.000	0.000	10.0	110.0	6.20	1,168
C	107 T	Square	catwalk	0.000	14.40	11.60	44.00	0.00	0.00	44.000	0.000	44.0	134.3	6.50	6,293
C	107B	Square	catwalk T44'	0.000	12.00	11.60	10.00	0.00	0.00	10.000	0.000	10.0	111.9	6.20	1,188
C	108 T	Square	catwalk	0.000	14.40	11.60	44.00	0.00	0.00	44.000	0.000	44.0	134.3	6.50	6,293
C	108B	Square	catwalk T44'	0.000	12.00	11.60	10.00	0.00	0.00	10.000	0.000	10.0	111.9	6.20	1,188
C	109 T	Square	catwalk	0.000	14.40	11.40	44.00	0.00	0.00	44.000	0.000	44.0	132.0	6.50	6,186
C	109B	Square	catwalk T44'	0.000	12.00	11.40	10.00	0.00	0.00	10.000	0.000	10.0	110.0	6.20	1,168
C	201	Peaked	top of sidewall	30.000	0.000	0.000	46.00	0.00	0.00	46.000	1.800	47.8	568.2	9.00	29,604
C	202	Peaked	top of sidewall	30.000	0.000	0.000	46.00	0.00	0.00	46.000	1.800	47.8	568.2	9.00	29,604

Bin count: 41

Facility: Wilton Section: C Total: 145,817

To Even: 146,000

**Overall Licensed Bin Capacity for:**

Wilton Farmers Union Elevator Co.

Bin count: 250

**Licensed Capacity:**

(includes pack)

1,852,034 Bu.

**Licensed Capacity (to even):**


(includes pack and section totals are rounded up to next highest 1000)

1,855,000 Bu.


WILTON FARMERS UNION ELEVATOR CO

WILTON ND

SECTION A

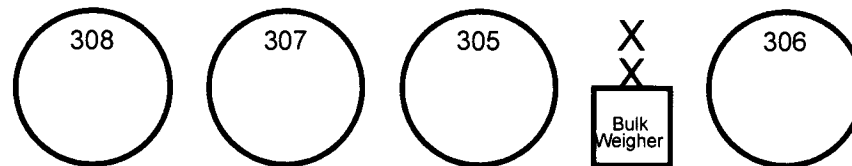

DMV&W RAIL

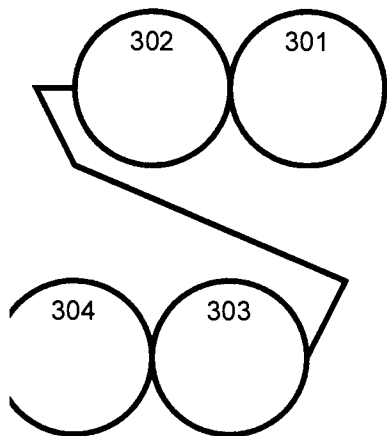

040	038	036	034	032
039	037	035	033	031

025	027	015	014	013	011	09		
24A	028	018	016	010	03	07	06	1
026	021	020	24	x x	cb	04	05	
		22			23			2

driveway



SECTION A



SECTION A

WILTON FARMERS UNION ELEVATOR CO  
 WILTON ND  
 SECTION C


cp rail

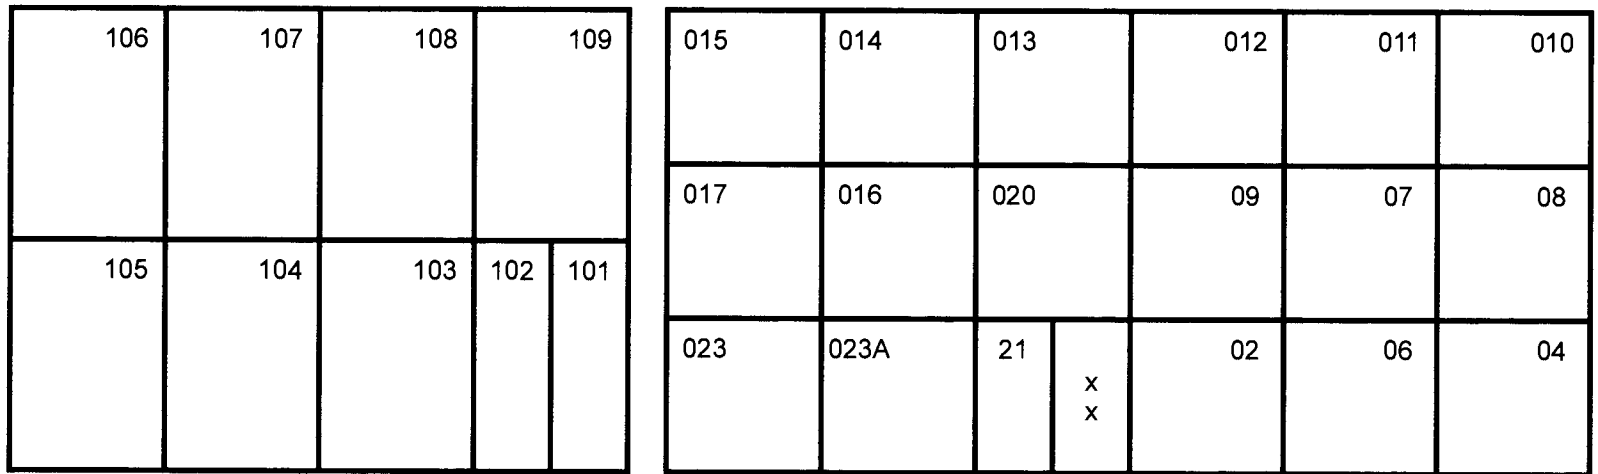

driveway

SECTION C

SECTION C

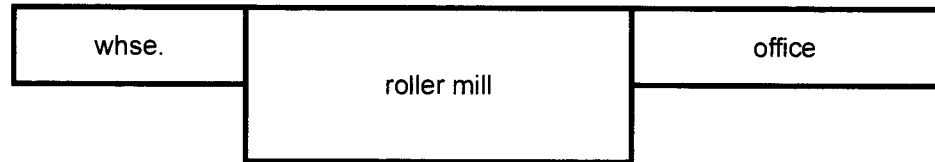

WILTON FARMERS UNION ELEVATOR CO  
 WILTON ND  
 REGAN LOCATION  
 SECTION D

Section D

12		13	16	17	
ML	10	11	19	18	21
				22	
9		33	31	20	25
8		14	23	24	
6	5	02	30	27	26
3	4	01	32	29	28


office

Section D

102	104	106	108	110	112	114
101	103	105	107	109	111	113
1 1 6	117	1 8				

WILTON FARMERS UNION ELEVATOR CO  
 WILTON ND  
 REGAN LOCATION  
 SECTION D & E

SECTION D

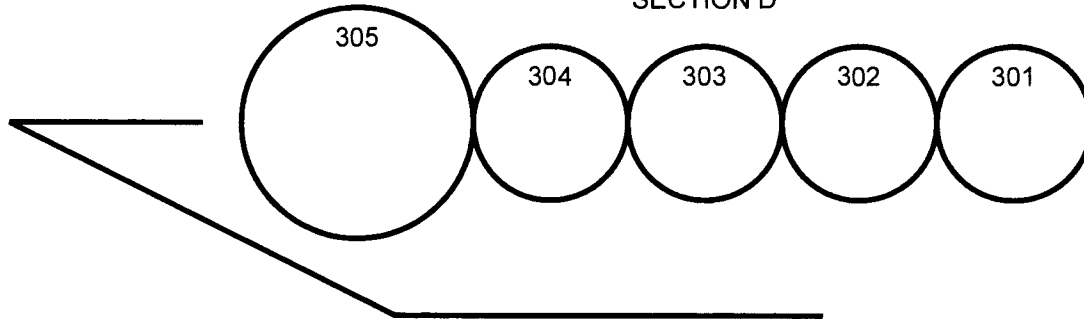

204	203	202
205	207	201
206	208	209




SECTION D

017	019	020	018
011	013	014	012
07	005	010	08
03	XXX	04	06
	XXX	01	




Section E




Section E

WILTON FARMERS UMNION ELEVATOR CO  
 WILTON ND  
 WASHBURN LOCATION  
 SECTION G

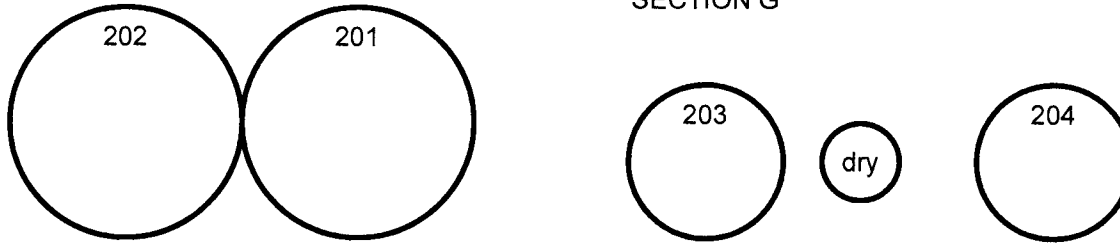

cp railraod spur

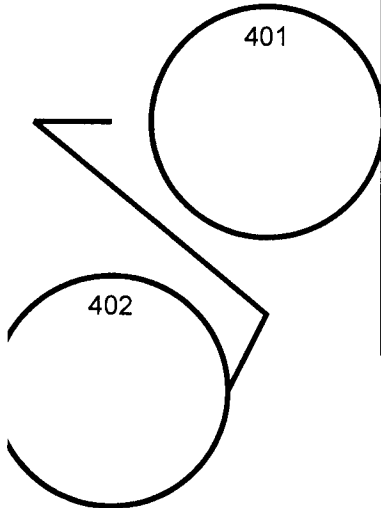

08		010	013	015	
06	05	09	18	016	019
		014	2		
04		03	xx xx	025	21
					20
				24	23

112	114	111	109
115	104	106	107
108	xx xx	102	105
TB			



SECTION G

SECTION G