

Exam Date:06/03/2015

American Bean LLC

Page: 1

Examiner: 1

P.O. Box 82

Petersburg , ND

County:

Phone: 701-230-9391

CCC Number:

Location/Container Numbers/Comments	Section	Capacity
-------------------------------------	---------	----------

PART A - ADDITIONAL SPACE TO BE INCLUDED UNDER LICENSE

<NO BINS ADDED>

Total:	0
--------	---

PART B - SPACE TO BE DELETED UNDER LICENSE

<NO BINS DELETED>

Total:	0
--------	---

PART C - ALL SPACE TO BE INCLUDED UNDER LICENSE

A	336,000
B	258,000
C	112,000
G	335,000
S	69,000
Z	128,000
Total:	1,238,000

PART D - TOTAL CAPACITY BY FUNCTIONAL UNIT

Cummings 1002	Z	128,000
Grand Forks 1003	G	335,000
Petersburg 1000	A B C	706,000
Sharon 1001	S	69,000
Total:		1,238,000

Exam Date:06/03/2015

American Bean LLC
 P.O. Box 82
 Petersburg , ND
 County:

Page: 1

Examiner: 1

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.) Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	---	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

Facility: Cummings

Section: Z

Z	001	Peaked	top of sidewall		36.000	0.000	0.000	24.50	0.00	0.00	24.500	2.200	26.7	818.2	10.0	24,031
Z	002	Peaked	top of sidewall		36.000	0.000	0.000	24.50	0.00	0.00	24.500	2.200	26.7	818.2	10.0	24,031
Z	003	Peaked	top of sidewall		36.000	0.000	0.000	24.50	0.00	0.00	24.500	2.200	26.7	818.2	10.0	24,031
Z	005	Peaked	top of sidewall		36.000	0.000	0.000	24.50	0.00	0.00	24.500	2.200	26.7	818.2	10.0	24,031
Z	101	Peaked	top of sidewall		26.500	0.000	0.000	19.80	0.00	0.00	19.800	1.600	21.4	443.4	8.20	10,267
Z	105	Peaked	top of sidewall		27.000	0.000	0.000	17.00	0.00	0.00	17.000	1.600	18.6	460.3	8.50	9,290
Z	106	Peaked	top of sidewall		27.000	0.000	0.000	17.00	0.00	0.00	17.000	1.600	18.6	460.3	8.50	9,290
Z	201	Peaked	top of sidewall		15.500	0.000	0.000	15.00	2.00	0.00	17.000	0.900	17.9	151.7	5.50	2,864

Bin count: 8

Facility: Cummings Section: Z Total: 127,835

To Even: 128,000

Exam Date:06/03/2015

American Bean LLC
 P.O. Box 82
 Petersburg , ND
 County:

Page: 2

Examiner: 1

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg). Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	---	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

Facility: Grand Forks

Section: G

G	001		Flat	top of sidewall	0.000	300.0	150.0	8.400	0.00	0.00	8.400	0.000	8.4	36173.6	10.0	334,244
---	-----	--	------	-----------------	-------	-------	-------	-------	------	------	-------	-------	-----	---------	------	---------

Bin count: 1

Facility: Grand Forks Section: G Total: 334,244

To Even: 335,000

Exam Date:06/03/2015

American Bean LLC

Page: 3

Examiner: 1

P.O. Box 82
Petersburg , ND
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg). Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	---	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

Facility: Petersburg

Section: A

A	001	Square	work floor		0.000	6.900	6.500	53.50	0.00	0.00	53.500	0.000	53.5	36.1	3.00	1,989
A	002	Square	work floor		0.000	6.900	6.400	53.50	0.00	0.00	53.500	0.000	53.5	35.5	3.00	1,956
A	003	Square	work floor		0.000	6.900	4.000	53.50	0.00	0.00	53.500	0.000	53.5	22.2	2.00	1,212
A	004 T	Square	work floor		0.000	6.900	4.100	8.000	0.00	0.00	8.000	0.000	8.0	22.7	2.00	186
A	004 B	Square	work floor - top 8'		0.000	10.90	4.100	43.50	0.00	0.00	43.500	0.000	43.5	35.9	3.00	1,609
A	005	Square	work floor		0.000	6.900	6.600	53.50	0.00	0.00	53.500	0.000	53.5	36.6	3.00	2,017
A	006	Square	work floor		0.000	6.900	6.700	53.50	0.00	0.00	53.500	0.000	53.5	37.2	3.00	2,050
A	007 T	Square	work floor		0.000	13.10	3.600	53.00	0.00	0.00	53.000	0.000	53.0	37.9	3.00	2,069
A	007 B	Square	work floor - top 53'		0.000	12.70	10.70	21.80	0.00	0.00	21.800	0.000	21.8	109.2	6.20	2,529
A	008 T	Square	scale well floor		0.000	4.100	3.700	12.50	0.00	0.00	12.500	0.000	12.5	12.2	2.00	156
A	008 B	Square	scale well floor - top 12.5'		0.000	10.30	3.700	35.50	0.00	0.00	35.500	0.000	35.5	30.6	2.50	1,113
A	009 T	Square	work floor		0.000	13.10	3.600	53.00	0.00	0.00	53.000	0.000	53.0	37.9	3.00	2,069
A	009 B	Square	work floor - top 53'		0.000	12.70	10.70	21.80	0.00	0.00	21.800	0.000	21.8	109.2	6.20	2,529
A	010	Square	work floor		0.000	6.800	6.500	53.00	0.00	0.00	53.000	0.000	53.0	35.5	3.00	1,938
A	011	Square	work floor		0.000	6.800	6.400	56.00	0.00	0.00	56.000	0.000	56.0	35.0	3.00	2,019
A	012	Square	scale well floor		0.000	7.200	6.800	47.50	0.00	0.00	47.500	0.000	47.5	39.4	3.00	1,928
A	013	Square	scale well floor		0.000	7.200	6.800	47.50	0.00	0.00	47.500	0.000	47.5	39.4	3.00	1,928
A	014	Square	work floor		0.000	6.800	6.600	56.00	0.00	0.00	56.000	0.000	56.0	36.1	3.00	2,083
A	015	Square	work floor		0.000	6.800	6.700	56.00	0.00	0.00	56.000	0.000	56.0	36.6	3.00	2,112
A	016	Square	work floor		0.000	7.200	6.500	53.00	0.00	0.00	53.000	0.000	53.0	37.6	3.00	2,053
A	017	Square	work floor		0.000	7.200	6.400	56.00	0.00	0.00	56.000	0.000	56.0	37.0	3.00	2,134
A	018	Square	work floor		0.000	7.200	7.200	56.00	0.00	0.00	56.000	0.000	56.0	41.7	3.50	2,417

Exam Date:06/03/2015

American Bean LLC

Page: 4

Examiner: 1

P.O. Box 82
Petersburg , ND
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.) Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack	
<u>Facility: Petersburg</u>																
<u>Section: A</u>																
A		019	Square	work floor	0.000	7.200	7.200	56.00	0.00	0.00	56.000	0.000	56.0	41.7	3.50	2,417
A		020	Square	work floor	0.000	7.200	6.600	56.00	0.00	0.00	56.000	0.000	56.0	38.2	3.00	2,203
A		021	Square	work floor	0.000	7.200	6.700	56.00	0.00	0.00	56.000	0.000	56.0	38.8	3.00	2,238
A		022	Square	work floor	0.000	10.50	7.000	25.50	0.00	0.00	25.500	0.000	25.5	59.1	4.80	1,579
A		023 T	Square	work floor	0.000	10.90	2.100	25.50	0.00	0.00	25.500	0.000	25.5	18.4	2.00	478
A		023 B	Square	work floor	0.000	12.70	10.60	49.30	0.00	0.00	49.300	0.000	49.3	108.2	6.20	5,665
A		024 T	Square	work floor	0.000	13.00	2.000	54.00	0.00	0.00	54.000	0.000	54.0	20.9	2.00	1,152
A		024 B	Square	work floor - top 54'	0.000	12.70	10.60	20.80	0.00	0.00	20.800	0.000	20.8	108.2	6.20	2,391
A		025	Square	work floor	0.000	10.50	3.600	24.00	0.00	0.00	24.000	0.000	24.0	30.4	2.50	748
A		026	Square	work floor	0.000	7.200	3.800	55.50	0.00	0.00	55.500	0.000	55.5	22.0	2.00	1,245
A		027	Square	work floor	0.000	7.200	3.800	55.50	0.00	0.00	55.500	0.000	55.5	22.0	2.00	1,245
A		028	Square	work floor	0.000	9.300	6.600	52.50	0.00	0.00	52.500	0.000	52.5	49.3	4.20	2,697
A		029	Square	work floor	0.000	9.300	6.700	52.50	0.00	0.00	52.500	0.000	52.5	50.1	4.50	2,748
A		031	Square	work floor	0.000	12.00	11.00	44.00	0.00	0.00	44.000	0.000	44.0	106.1	6.20	4,957
A		032 T	Square	work floor	0.000	12.00	2.600	44.00	0.00	0.00	44.000	0.000	44.0	25.1	2.50	1,132
A		032 B	Square	work floor - top 44'	0.000	13.90	12.00	28.00	0.00	0.00	28.000	0.000	28.0	134.1	6.50	3,999
A		033 T	Square	work floor	0.000	14.20	12.00	61.70	0.00	0.00	61.700	0.000	61.7	137.0	6.50	9,002
A		033 B	Square	work floor - top 61.7'	0.000	11.90	9.100	11.50	0.00	0.00	11.500	0.000	11.5	87.0	5.80	1,059
A		034 T	Square	work floor	0.000	14.90	12.00	61.70	0.00	0.00	61.700	0.000	61.7	143.7	6.80	9,469
A		034 B	Square	work floor - top 61.7'	0.000	11.90	9.100	11.50	0.00	0.00	11.500	0.000	11.5	87.0	5.80	1,059
A		035	Square	work floor	0.000	14.10	12.00	72.00	0.00	0.00	72.000	0.000	72.0	136.0	6.50	10,428
A		036	Square	work floor	0.000	12.60	11.00	44.00	0.00	0.00	44.000	0.000	44.0	111.4	6.20	5,206

Exam Date:06/03/2015

American Bean LLC

Page: 5

Examiner: 1

P.O. Box 82
Petersburg, ND
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.) Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	---	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

Facility: Petersburg

Section: A

A	037 T	Square	work floor		0.000	12.60	2.600	44.00	0.00	0.00	44.000	0.000	44.0	26.3	2.50	1,186
A	037 B	Square	work floor - top 44'		0.000	13.90	12.60	28.00	0.00	0.00	28.000	0.000	28.0	140.8	6.80	4,210
A	038 T	Square	work floor		0.000	14.20	12.60	61.70	0.00	0.00	61.700	0.000	61.7	143.8	6.80	9,475
A	038 B	Square	work floor - top 61.7'		0.000	12.40	9.100	11.50	0.00	0.00	11.500	0.000	11.5	90.7	5.80	1,103
A	039 T	Square	work floor		0.000	14.90	12.60	61.70	0.00	0.00	61.700	0.000	61.7	150.9	6.80	9,944
A	039 B	Square	work floor - top 61.7'		0.000	12.40	9.100	11.50	0.00	0.00	11.500	0.000	11.5	90.7	5.80	1,103
A	040	Square	work floor		0.000	14.10	12.60	72.00	0.00	0.00	72.000	0.000	72.0	142.8	6.80	10,981
A	041	Square	work floor		0.000	12.50	11.00	44.00	0.00	0.00	44.000	0.000	44.0	110.5	6.20	5,163
A	042 T	Square	work floor		0.000	12.50	2.600	44.00	0.00	0.00	44.000	0.000	44.0	26.1	2.50	1,177
A	042 B	Square	work floor -top 44'		0.000	13.90	12.50	28.00	0.00	0.00	28.000	0.000	28.0	139.7	6.80	4,178
A	043 T	Square	work floor		0.000	14.20	12.50	61.70	0.00	0.00	61.700	0.000	61.7	142.7	6.80	9,404
A	043 B	Square	work floor - top 61.7'		0.000	12.30	9.100	11.50	0.00	0.00	11.500	0.000	11.5	90.0	5.80	1,095
A	044 T	Square	work floor		0.000	14.90	12.50	61.70	0.00	0.00	61.700	0.000	61.7	149.7	6.80	9,864
A	044 B	Square	work floor - top 61.7'		0.000	12.30	9.100	11.50	0.00	0.00	11.500	0.000	11.5	90.0	5.80	1,095
A	045	Square	work floor		0.000	14.10	12.50	72.00	0.00	0.00	72.000	0.000	72.0	141.7	6.80	10,896
A	046	Square	work floor		0.000	12.50	11.00	44.00	0.00	0.00	44.000	0.000	44.0	110.5	6.20	5,163
A	047 T	Square	work floor		0.000	12.50	2.600	44.00	0.00	0.00	44.000	0.000	44.0	26.1	2.50	1,177
A	047 B	Square	work floor - top 44'		0.000	13.90	12.50	28.00	0.00	0.00	28.000	0.000	28.0	139.7	6.80	4,178
A	048 T	Square	work floor		0.000	14.20	12.50	61.70	0.00	0.00	61.700	0.000	61.7	142.7	6.80	9,404
A	048 B	Square	work floor - top 61.7'		0.000	12.30	9.100	11.50	0.00	0.00	11.500	0.000	11.5	90.0	5.80	1,095
A	049 T	Square	work floor		0.000	14.90	12.50	61.70	0.00	0.00	61.700	0.000	61.7	149.7	6.80	9,864
A	049 B	Square	work floor - top 61.7		0.000	12.30	9.100	11.50	0.00	0.00	11.500	0.000	11.5	90.0	5.80	1,095

Exam Date:06/03/2015

American Bean LLC

Page: 6

Examiner: 1

P.O. Box 82
Petersburg, ND
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	-------------------------------	--------	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

Facility: Petersburg

Section: A

A	050		Square	work floor	0.000	14.10	12.50	72.00	0.00	0.00	72.000	0.000	72.0	141.7	6.80	10,896
A	051		Square	work floor	0.000	12.50	11.00	44.00	0.00	0.00	44.000	0.000	44.0	110.5	6.20	5,163
A	052 T		Square	work floor	0.000	12.50	2.600	44.00	0.00	0.00	44.000	0.000	44.0	26.1	2.50	1,177
A	052 B		Square	work floor - top 44'	0.000	13.90	12.50	28.00	0.00	0.00	28.000	0.000	28.0	139.7	6.80	4,178
A	053 T		Square	work floor	0.000	14.20	12.50	61.70	0.00	0.00	61.700	0.000	61.7	142.7	6.80	9,404
A	053 B		Square	work floor - top 61.7'	0.000	12.40	9.100	11.50	0.00	0.00	11.500	0.000	11.5	90.7	5.80	1,103
A	054 T		Square	work floor	0.000	14.90	12.50	61.70	0.00	0.00	61.700	0.000	61.7	149.7	6.80	9,864
A	054 B		Square	work floor - top 61.7'	0.000	12.40	9.100	11.50	0.00	0.00	11.500	0.000	11.5	90.7	5.80	1,103
A	055		Square	work floor	0.000	14.10	12.50	72.00	0.00	0.00	72.000	0.000	72.0	141.7	6.80	10,896
A	056		Square	work floor	0.000	12.30	11.00	44.00	0.00	0.00	44.000	0.000	44.0	108.8	6.20	5,084
A	057 T		Square	work floor	0.000	12.30	2.600	44.00	0.00	0.00	44.000	0.000	44.0	25.7	2.50	1,159
A	057 B		Square	work floor - top 44'	0.000	13.90	12.30	27.00	0.00	0.00	27.000	0.000	27.0	137.4	6.50	3,951
A	058 T		Square	work floor	0.000	14.20	12.30	61.70	0.00	0.00	61.700	0.000	61.7	140.4	6.80	9,252
A	058 B		Square	work floor - top 61.7'	0.000	12.00	9.100	10.00	0.00	0.00	10.000	0.000	10.0	87.8	5.80	929
A	059 T		Square	work floor	0.000	14.90	12.30	61.70	0.00	0.00	61.700	0.000	61.7	147.3	6.80	9,706
A	059 B		Square	work floor - top 61.7'	0.000	12.00	9.100	10.00	0.00	0.00	10.000	0.000	10.0	87.8	5.80	929
A	060		Square	work floor	0.000	14.10	12.30	71.00	0.00	0.00	71.000	0.000	71.0	139.4	6.80	10,570
A	101		Peaked	top of sidewall	16.000	0.000	0.000	15.00	2.00	0.00	17.000	1.000	18.0	161.6	5.80	3,078
A	102		Peaked	top of sidewall	16.000	0.000	0.000	15.00	2.00	0.00	17.000	1.000	18.0	161.6	5.80	3,078
A	103		Peaked	top of sidewall	16.000	0.000	0.000	20.00	2.00	0.00	22.000	1.000	23.0	161.6	5.80	3,933
A	104		Peaked	top of sidewall	16.000	0.000	0.000	20.00	2.00	0.00	22.000	1.000	23.0	161.6	5.80	3,933

NDPSC Bin Capacity Chart

Exam Date:06/03/2015

American Bean LLC

Examiner: 1

P.O. Box 82
Petersburg , ND
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.) Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	---	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

Bin count: 87

Facility: Petersburg Section: A Total: 335,449

To Even: 336,000

Section: B

B	100	Flat	bag storage area		0.000	50.00	50.00	4.000	0.00	0.00	4.000	0.000	4.0	2009.6	10.0	8,842
B	201	Peaked	top of sidewall		54.000	0.000	0.000	57.50	0.00	0.00	57.500	3.800	61.3	1841.0	10.0	124,138
B	202	Peaked	top of sidewall		54.000	0.000	0.000	57.50	0.00	0.00	57.500	3.800	61.3	1841.0	10.0	124,138

Bin count: 3

Facility: Petersburg Section: B Total: 257,118

To Even: 258,000

Section: C

C	101	Quonset	quonset south of plant		0.000	298.0	48.00	9.000	0.00	0.00	9.000	0.000	9.0	11222.8	10.0	111,107
---	-----	---------	------------------------	--	-------	-------	-------	-------	------	------	-------	-------	-----	---------	------	---------

Bin count: 1

Facility: Petersburg Section: C Total: 111,107

To Even: 112,000

Exam Date:06/03/2015

American Bean LLC

Page: 8

Examiner: 1

P.O. Box 82
Petersburg , ND
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.) Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	---	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

Facility: Sharon

Section: S

S	001	Peaked	top of sidewall		16.000	0.000	0.000	20.00	2.00	0.00	22.000	1.000	23.0	161.6	5.80	3,933
S	002	Peaked	top of sidewall		16.000	0.000	0.000	20.00	2.00	0.00	22.000	1.000	23.0	161.6	5.80	3,933
S	003	Peaked	top of sidewall		16.000	0.000	0.000	20.00	2.00	0.00	22.000	1.000	23.0	161.6	5.80	3,933
S	004	Peaked	top of sidewall		48.000	0.000	0.000	31.80	0.00	0.00	31.800	3.400	35.2	1454.6	10.0	56,322

Bin count: 4

Facility: Sharon Section: S Total: 68,121

To Even: 69,000

Overall Licensed Bin Capacity for:

American Bean LLC

Bin count: 104

Licensed Capacity:
(includes pack)


1,233,874 Bu.

Licensed Capacity (to even):
(includes pack and section totals are
rounded up to next highest 1000)

1,238,000 Bu.



BNSF Rail

Section A

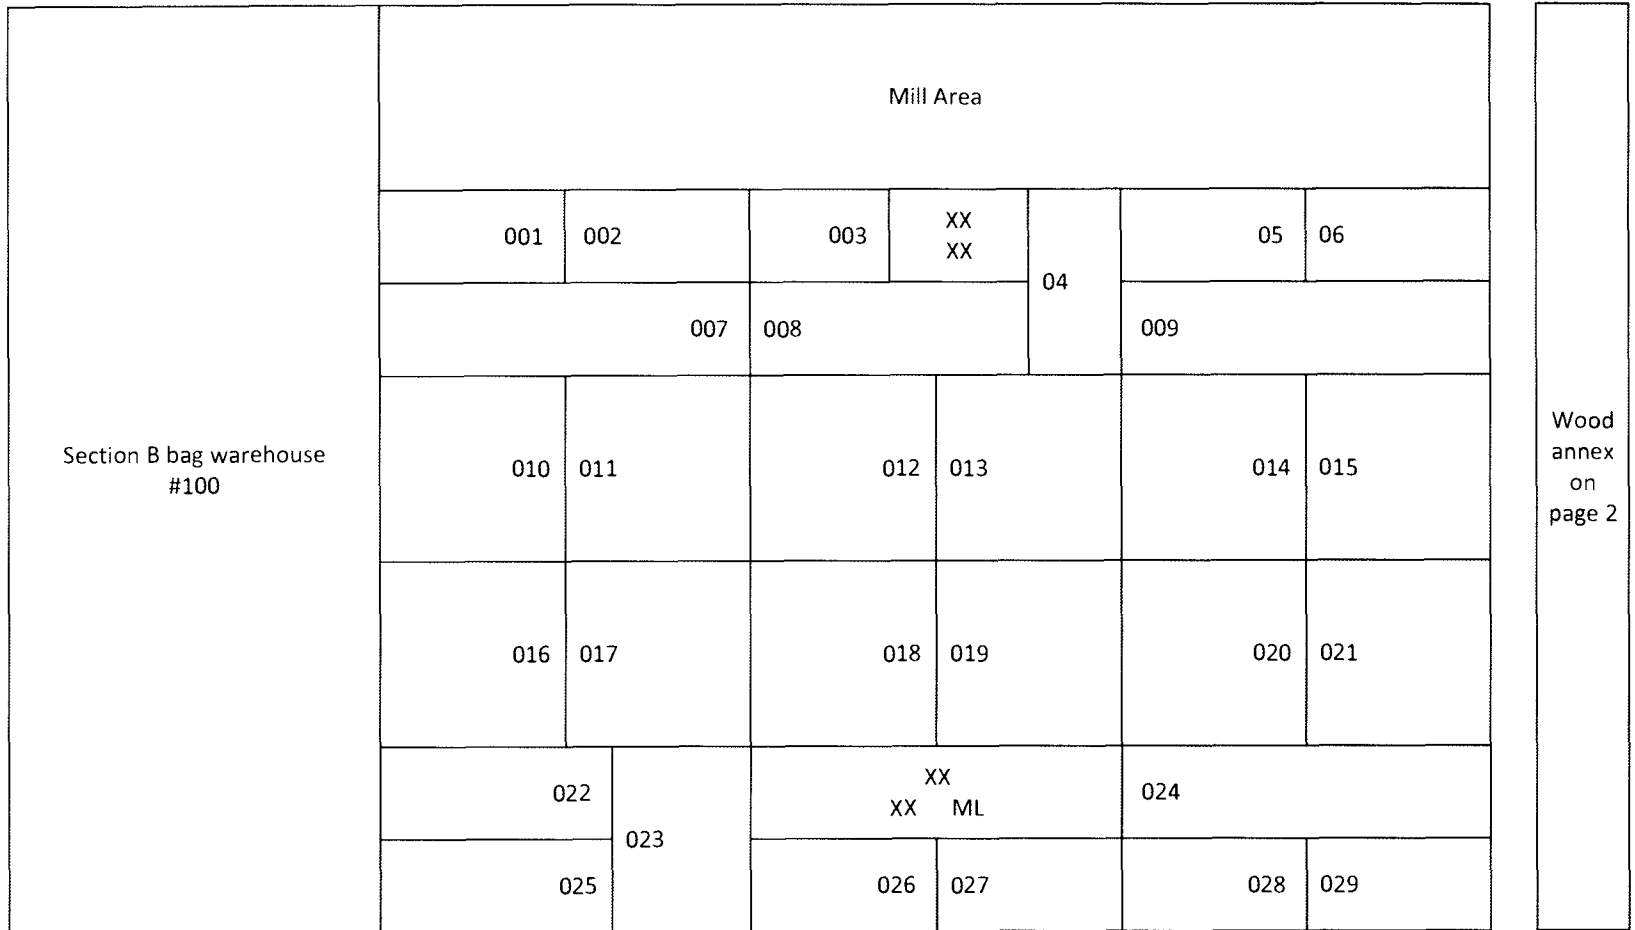

Wood annex on page 2

Section A




BNSF Rail

Wood Annex Section A


031	036	041	046	051	056
032	037	042	047	052	057
033	038	043	048	053	058
034	039	044	049	054	059
035	040	045	050	055	060

← To adjacent main house

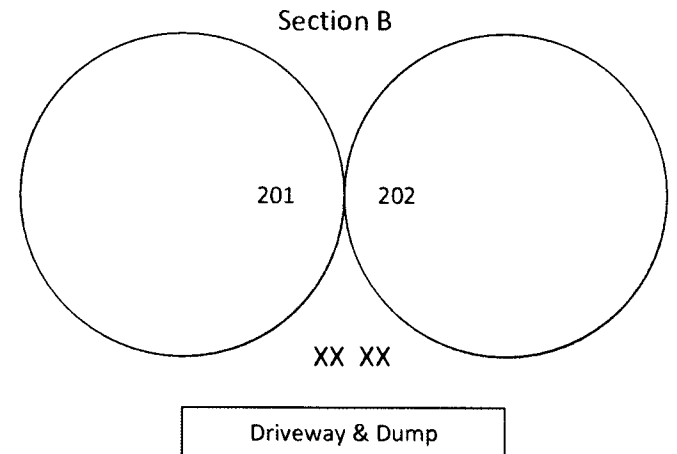


AMERICAN BEAN LLC
Corp# 4106 Petersburg ND
Section C quonset
Located south across street
from office Section A

Basic dimensions
298'L x 48' W
Sidewall-overhead brace
channels top of to floor
1st N&S 10.75'
2nd N&S 16.5'
Bottom center u-trough to
floor = 17.5'
U-trough side wall space on
center = 2.25'

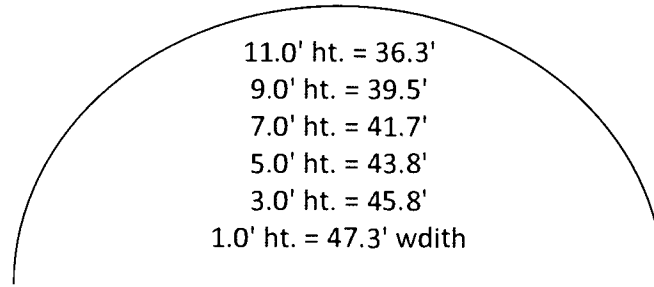


Section C #101 quonset
South of Elevator

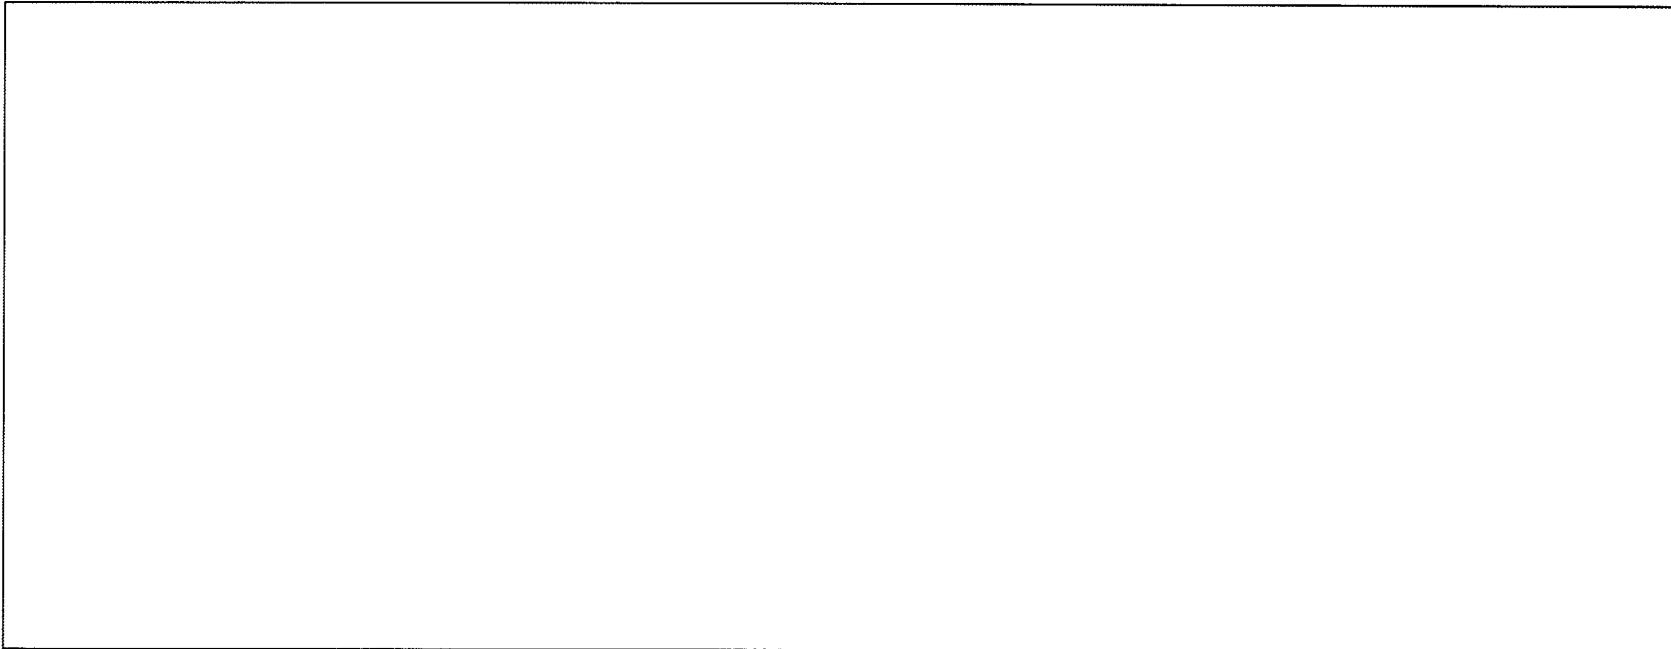

AMERICAN BEAN LLC
Corp# 4106 Petersburg ND
Sharon location
Section 5 – located 1 mile
east of Sharon North side of
highway


SECTION 5

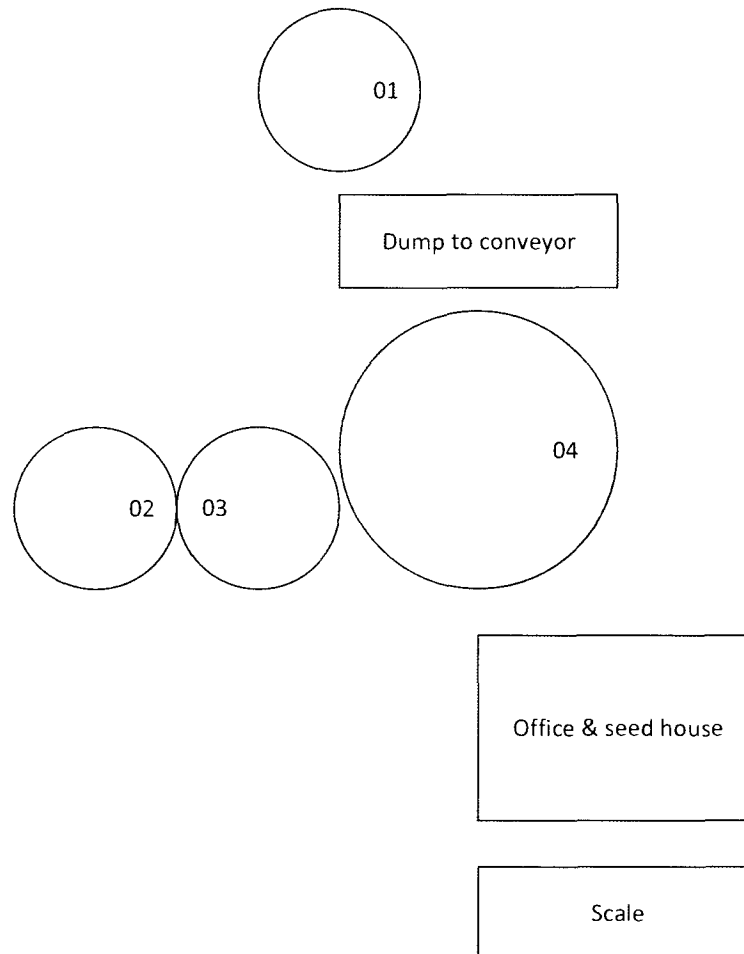

AMERICAN BEAN LLC
Corp# 4106 Petersburg ND
Grand Forks location
Section G #001 large flat
storage building west of
interstate on 32nd avenue 1
of 2 large storage buildings
adjacent to rail tracks south
side of road
Buildings leased from
Johnson Farms


SECTION G FLAT 001

Basic dimensions
150' W x 300'L
Grain wall ht. on sides 8.75'
Grain wall ht. on ends 8.0'
Bottom of rafter beam at the
sidewall = 17.8'
Bottom rafter beam at 37.5'
in from sidewall = 23.5'

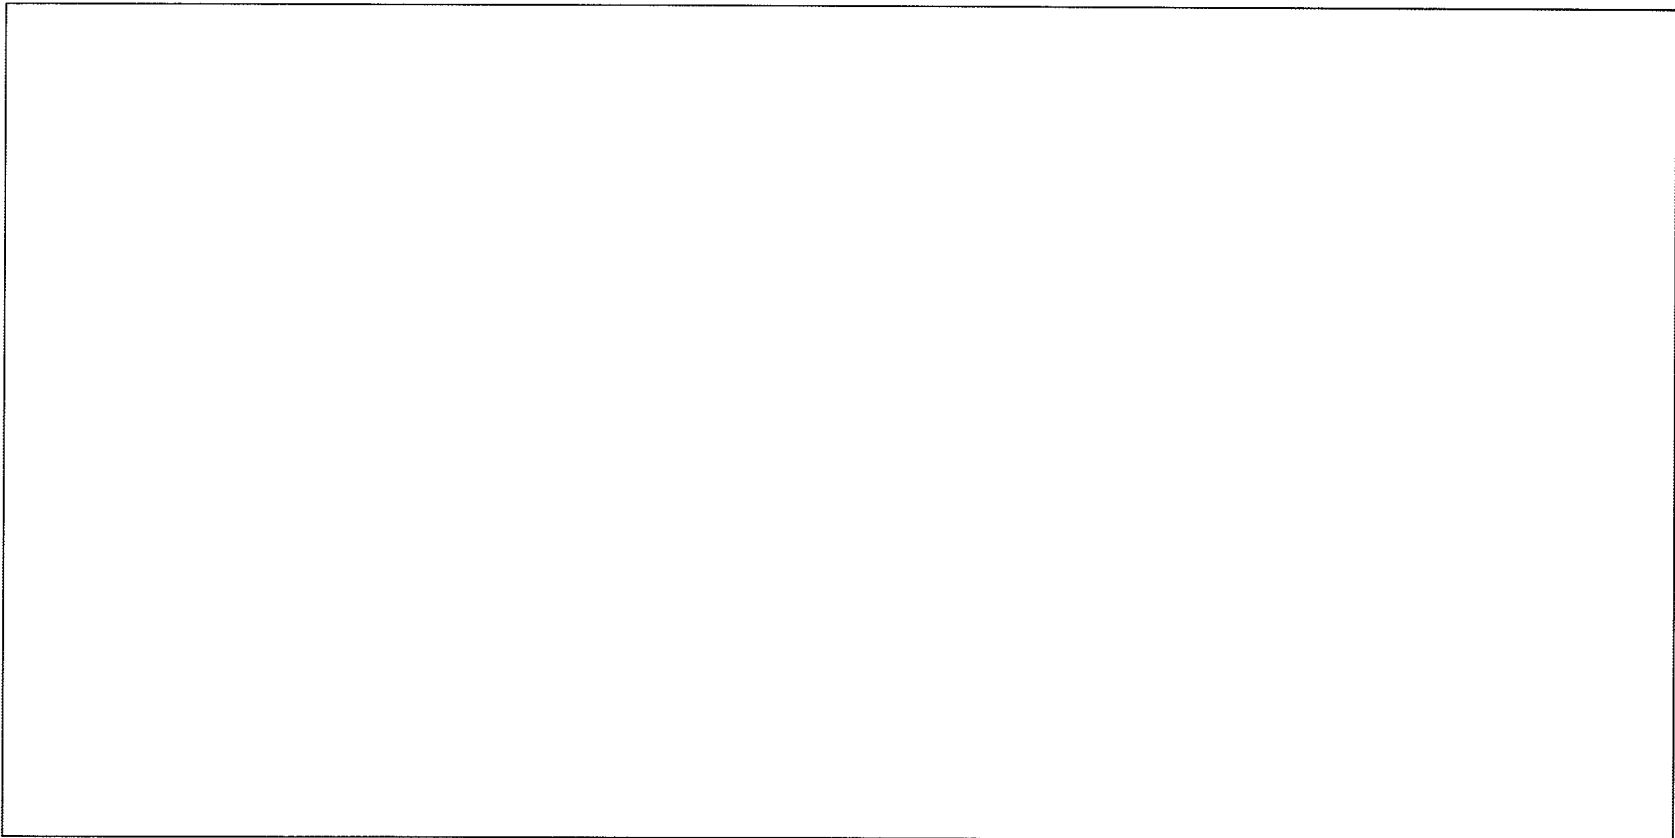

APRIL 16, 2014

CUMMINGS AG INC.
CUMMINGS N.D.

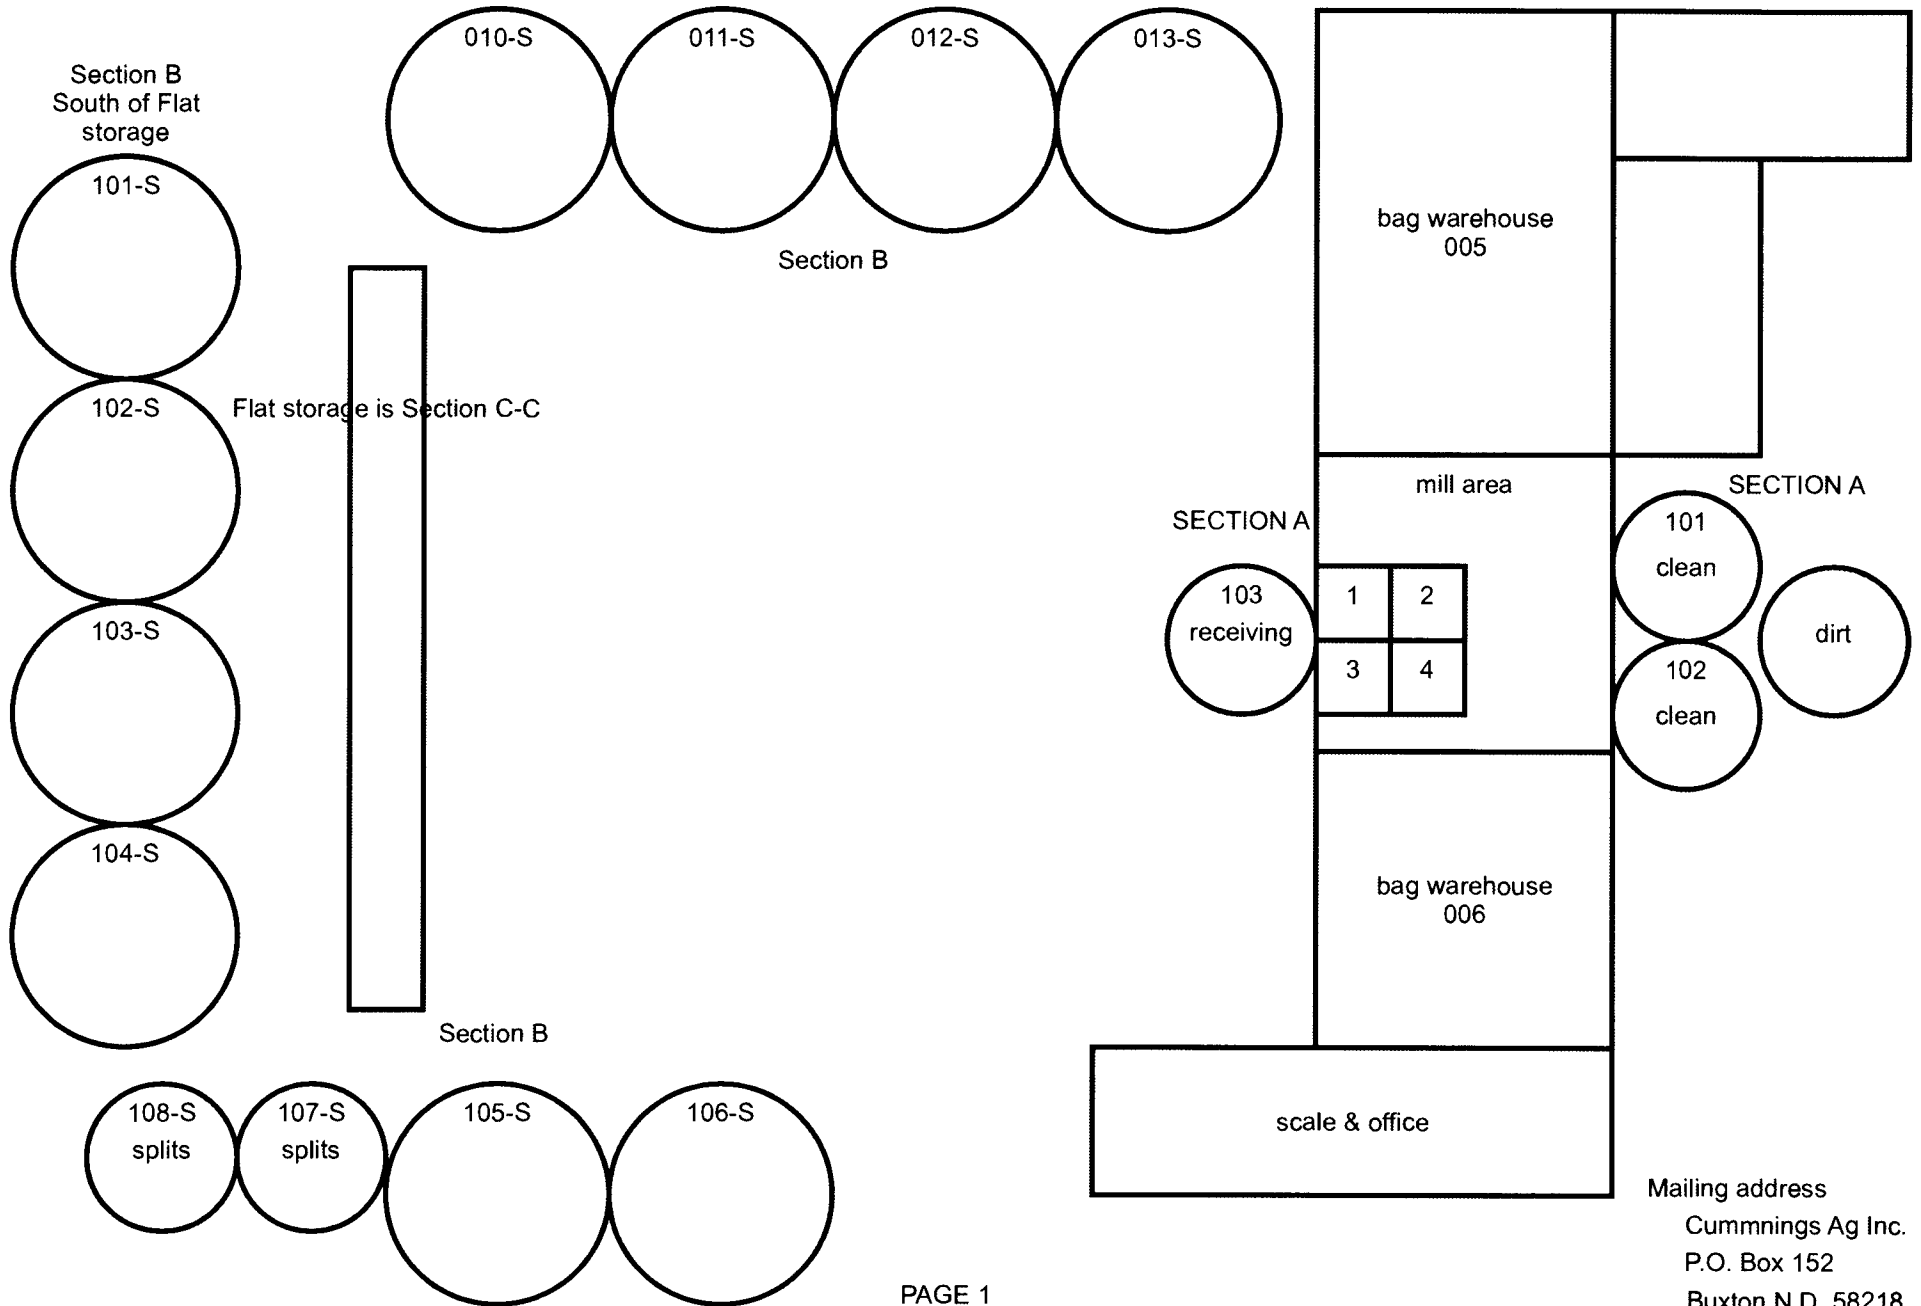

Mailing address
Cummings Ag Inc.
P.O. Box 152
Buxton N.D. 58218

Exam Date:10/22/2008

Larimore Bean Company

Page: 1

Examiner: 2

PO Box 607
Larimore, ND
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.) Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	---	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

Facility: Sharon

Section: A-C

Added	A-C	001	Square	eave at side wall-Cummings	41.900	7.000	7.000	25.00	1.80	0.00	26.800	0.000	26.8	39.4	3.00	1,088
Added	A-C	002	Square	eave at side wall-Cummings	41.900	7.000	7.000	25.00	1.80	0.00	26.800	0.000	26.8	39.4	3.00	1,088
Added	A-C	003	Square	eave at side wall-Cummings	41.900	7.000	7.000	25.00	1.80	0.00	26.800	0.000	26.8	39.4	3.00	1,088
Added	A-C	004	Square	eave at side wall-Cummings	41.900	7.000	7.000	25.00	1.80	0.00	26.800	0.000	26.8	39.4	3.00	1,088
Added	A-C	101	Peaked	eave at side wall-Cummings	15.000	60.00	36.00	15.00	2.00	0.00	17.000	0.900	17.9	142.1	5.50	2,684
Added	A-C	102	Peaked	eave at side wall-Cummings	15.000	60.00	36.00	15.00	2.00	0.00	17.000	0.900	17.9	142.1	5.50	2,684
Added	A-C	103	Peaked	eave at side wall-Cummings	24.000	0.000	0.000	19.50	2.70	0.00	22.200	1.400	23.6	363.7	7.80	9,252

Bin count: 7

Facility: Sharon Section: A-C Total: **18,972**To Even: **19,000**

Section: B-C

Added	B-C	001-N	Peaked	eave at side wall-Cummings	36.000	0.000	0.000	24.50	0.00	0.00	24.500	2.200	26.7	818.2	10.0	24,031
Added	B-C	002-N	Peaked	eave at side wall-Cummings	36.000	0.000	0.000	24.50	0.00	0.00	24.500	2.200	26.7	818.2	10.0	24,031
Added	B-C	003-N	Peaked	eave at side wall-Cummings	36.000	0.000	0.000	24.50	0.00	0.00	24.500	2.200	26.7	818.2	10.0	24,031
Added	B-C	004-N	Peaked	eave at side wall-Cummings	36.000	0.000	0.000	24.50	0.00	0.00	24.500	2.200	26.7	818.2	10.0	24,031
Added	B-C	005-N	Peaked	eave at side wall-Cummings	41.900	0.000	0.000	24.25	0.00	0.00	24.250	2.500	26.8	1108.4	10.0	32,676
Added	B-C	006-N	Peaked	eave at side wall-Cummings	41.900	0.000	0.000	24.25	0.00	0.00	24.250	2.500	26.8	1108.4	10.0	32,676
Added	B-C	010-S	Peaked	eave at side wall-Cummings	41.900	0.000	0.000	24.25	0.00	0.00	24.250	2.500	26.8	1108.4	10.0	32,676
Added	B-C	011-S	Peaked	eave at side wall-Cummings	41.900	0.000	0.000	24.25	0.00	0.00	24.250	2.500	26.8	1108.4	10.0	32,676
Added	B-C	012-S	Peaked	eave at side wall-Cummings	41.900	0.000	0.000	24.25	0.00	0.00	24.250	2.500	26.8	1108.4	10.0	32,676
Added	B-C	013-S	Peaked	eave at side wall-Cummings	41.900	0.000	0.000	24.25	0.00	0.00	24.250	2.500	26.8	1108.4	10.0	32,676
	B-C	101-S	Peaked	eave at side wall-Cummings	26.500	0.000	0.000	20.00	0.00	0.00	20.000	1.600	21.6	443.4	8.20	10,362

Exam Date:10/22/2008

Larimore Bean Company

Page: 2

Examiner: 2

PO Box 607
Larimore , ND
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	-------------------------------	--------	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

Facility: Sharon

Section: B-C

	B-C	102-S	Peaked	eave at side wall-Cummings	26.500	0.000	0.000	20.00	0.00	0.00	20.000	1.600	21.6	443.4	8.20	10,362
	B-C	103-S	Peaked	eave at side wall-Cummings	26.500	0.000	0.000	20.00	0.00	0.00	20.000	1.600	21.6	443.4	8.20	10,362
	B-C	104-S	Peaked	eave at side wall-Cummings	26.500	0.000	0.000	19.80	0.00	0.00	19.800	1.600	21.4	443.4	8.20	10,267
Added	B-C	105-S	Peaked	eave at side wall-Cummings	27.000	0.000	0.000	17.00	0.00	0.00	17.000	1.600	18.6	460.3	8.50	9,290
Added	B-C	106-S	Peaked	eave at side wall-Cummings	27.000	0.000	0.000	17.00	0.00	0.00	17.000	1.600	18.6	460.3	8.50	9,290
Added	B-C	107-S	Peaked	eave at side wall-Cummings	15.000	0.000	0.000	15.00	2.30	0.00	17.300	0.900	18.2	142.1	5.50	2,728
Added	B-C	108-S	Peaked	eave at side wall-Cummings	12.500	0.000	0.000	15.00	3.30	0.00	18.300	0.800	19.1	98.6	5.00	1,977

Bin count: 18

Facility: Sharon Section: B-C Total: 356,818

To Even: 357,000

Section: C-C

Added	C-C	005	Flat	eave at side wall-Cummings	0.000	60.00	56.00	7.500	0.00	0.00	7.500	0.000	7.5	2701.0	10.0	22,284
Added	C-C	006	Flat	eave at side wall-Cummings	0.000	60.00	36.00	7.500	0.00	0.00	7.500	0.000	7.5	1736.3	10.0	14,324

Bin count: 2

Facility: Sharon Section: C-C Total: 36,608

To Even: 37,000

Overall Licensed Bin Capacity for:

Larimore Bean Company

Bin count: 27

Licensed Capacity:
(includes pack)

908,210 Bu.

Licensed Capacity (to even):
(includes pack and section totals are rounded up to next highest 1000)

910,000 Bu.

Exam Date:10/22/2008

Larimore Bean Company

Page: 1

Examiner: 2

PO Box 607

Larimore, ND

County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.)	Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	-------------------------------	--------	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

Facility: Sharon

Section: A-C

Added	A-C	001	Square	eave at side wall-Cummings	41.900	7.000	7.000	25.00	1.80	0.00	26.800	0.000	26.8	39.4	3.00	1,088
Added	A-C	002	Square	eave at side wall-Cummings	41.900	7.000	7.000	25.00	1.80	0.00	26.800	0.000	26.8	39.4	3.00	1,088
Added	A-C	003	Square	eave at side wall-Cummings	41.900	7.000	7.000	25.00	1.80	0.00	26.800	0.000	26.8	39.4	3.00	1,088
Added	A-C	004	Square	eave at side wall-Cummings	41.900	7.000	7.000	25.00	1.80	0.00	26.800	0.000	26.8	39.4	3.00	1,088
Added	A-C	005	Flat	eave at side wall-Cummings	0.000	60.00	56.00	7.500	0.00	0.00	7.500	0.000	7.5	2701.0	10.0	22,284
Added	A-C	006	Flat	eave at side wall-Cummings	0.000	60.00	36.00	7.500	0.00	0.00	7.500	0.000	7.5	1736.3	10.0	14,324
Added	A-C	101	Peaked	eave at side wall-Cummings	15.000	60.00	36.00	15.00	2.00	0.00	17.000	0.900	17.9	142.1	5.50	2,684
Added	A-C	102	Peaked	eave at side wall-Cummings	15.000	60.00	36.00	15.00	2.00	0.00	17.000	0.900	17.9	142.1	5.50	2,684
	A-C	201	Peaked	eave at side wall-Cummings	26.500	0.000	0.000	20.00	0.00	0.00	20.000	1.600	21.6	443.4	8.20	10,362
	A-C	202	Peaked	eave at side wall-Cummings	26.500	0.000	0.000	20.00	0.00	0.00	20.000	1.600	21.6	443.4	8.20	10,362
	A-C	203	Peaked	eave at side wall-Cummings	26.500	0.000	0.000	20.00	0.00	0.00	20.000	1.600	21.6	443.4	8.20	10,362
	A-C	204	Peaked	eave at side wall-Cummings	26.500	0.000	0.000	19.80	0.00	0.00	19.800	1.600	21.4	443.4	8.20	10,267
Added	A-C	205	Peaked	eave at side wall-Cummings	27.000	0.000	0.000	17.00	0.00	0.00	17.000	1.600	18.6	460.3	8.50	9,290
Added	A-C	206	Peaked	eave at side wall-Cummings	27.000	0.000	0.000	17.00	0.00	0.00	17.000	1.600	18.6	460.3	8.50	9,290
Added	A-C	207	Peaked	eave at side wall-Cummings	15.000	0.000	0.000	15.00	2.30	0.00	17.300	0.900	18.2	142.1	5.50	2,728
Added	A-C	208	Peaked	eave at side wall-Cummings	12.500	0.000	0.000	15.00	3.30	0.00	18.300	0.800	19.1	98.6	5.00	1,977
Added	A-C	209	Peaked	eave at side wall-Cummings	24.000	0.000	0.000	19.50	2.70	0.00	22.200	1.400	23.6	363.7	7.80	9,252
	A-C	210	Peaked	eave at side wall-Cummings	41.900	0.000	0.000	24.25	0.00	0.00	24.250	2.500	26.8	1108.4	10.0	32,676
	A-C	211	Peaked	eave at side wall-Cummings	41.900	0.000	0.000	24.25	0.00	0.00	24.250	2.500	26.8	1108.4	10.0	32,676

Bin count: 19

Facility: Sharon Section: A-C Total: 185,570

To Even: 186,000

Exam Date:10/22/2008

Larimore Bean Company

Page: 2

Examiner: 2

PO Box 607
Larimore, ND
County:

Status	Section	Bin Number	Bin Type	Base Point	Diameter or Bu/Ft (Irreg.) Length	Width	Side wall	Add for Hopper	Ded. for Obst.	Effective Depth	Add for Peak	Depth for Capac.	Bushels per Foot	Base Pack%	Bushel Capacity with Pack
--------	---------	------------	----------	------------	---	-------	--------------	----------------------	----------------------	--------------------	--------------------	------------------------	------------------------	---------------	------------------------------

Facility: Sharon

Section: B-C

Added	B-C	001	Peaked	eave at side wall-Cummings	36.000	0.000	0.000	24.50	0.00	0.00	24.500	2.200	26.7	818.2	10.0	24,031
Added	B-C	002	Peaked	eave at side wall-Cummings	36.000	0.000	0.000	24.50	0.00	0.00	24.500	2.200	26.7	818.2	10.0	24,031
Added	B-C	003	Peaked	eave at side wall-Cummings	36.000	0.000	0.000	24.50	0.00	0.00	24.500	2.200	26.7	818.2	10.0	24,031
Added	B-C	004	Peaked	eave at side wall-Cummings	36.000	0.000	0.000	24.50	0.00	0.00	24.500	2.200	26.7	818.2	10.0	24,031
Added	B-C	005	Peaked	eave at side wall-Cummings	41.900	0.000	0.000	24.25	0.00	0.00	24.250	2.500	26.8	1108.4	10.0	32,676
Added	B-C	006	Peaked	eave at side wall-Cummings	41.900	0.000	0.000	24.25	0.00	0.00	24.250	2.500	26.8	1108.4	10.0	32,676
Added	B-C	301	Peaked	eave at side wall-Cummings	15.000	0.000	0.000	17.50	2.00	0.00	19.500	0.900	20.4	142.1	5.50	3,058
Added	B-C	302	Peaked	eave at side wall-Cummings	15.000	0.000	0.000	17.50	2.00	0.00	19.500	0.900	20.4	142.1	5.50	3,058

Bin count: 8

Facility: Sharon Section: B-C Total: 167,592

To Even: 168,000

Overall Licensed Bin Capacity for:

Larimore Bean Company

Bin count: 27

Licensed Capacity:
(includes pack)

848,974 Bu.

Licensed Capacity (to even):
(includes pack and section totals are rounded up to next highest 1000)

851,000 Bu.