

Memorandum

To: Commissioners Christmann, Fedorchak and Kroshus

From: Victor Schock Public Utility Analyst

VS

Date: December 14, 2021

Re: Hiland Crude, LLC, 2.9-Mile Crude Oil Pipeline – Williams County, Siting Application, Case No. PU-21-353

On July 30, 2021, Hiland Crude, LLC (Hiland), filed with the North Dakota Public Service Commission a combined application for a certificate of corridor compatibility and route permit concerning the location of approximately 2.9 miles of 8-inch crude oil pipeline, located in Williams County, North Dakota.

On October 6, 2021, the Commission deemed the Application complete and issued a Notice of Filing and Public Hearing scheduling a public hearing for November 22, 2021, at 9:00 a.m. Central Time, at the Williston City Hall, 22 East Broadway, Williston, North Dakota 58801.

During the November 22, 2021 hearing, Hiland was asked to explain in detail its proposed method of construction/topsoil segregation since it is proposing to complete this pipeline project during the winter months when topsoil would be frozen. Hiland agreed to provide the details in a late filed exhibit.

Late filed Exhibit 3 was filed by Hiland on December 7, 2021. The filing details the winter construction method involving both bulldozers and motor graders utilizing ripping teeth or rippers to break up the frozen ground.

Given that the North Dakota Commission has not often granted permission for winter construction, it is appropriate to ensure the proposed method will not result in permanent harm to the environment. Upon further review, Staff learned that cases PU-16-614 and PU-16-753 both permitted a similar method of winter construction following guidelines detailed in North Dakota State University Extension Service, Publication R1728, "Successful Reclamation of Lands Disturbed by Oil and Gas Development and Infrastructure Construction," August 2014 and INGAA Foundation, Inc., Report No. 2013.04, "Planning Guidelines for Pipeline Construction During Frozen Conditions," December 2013.

Based on review of those cases and the resulting satisfactory reclamation of those pipeline sites, Staff recommends inclusion of the attached documents into the record of this proceeding, and the following Order provision in this case requiring Hiland to follow those two publications for the construction of this pipeline.

"In the event that construction is undertaken by Hiland after topsoil has frozen to the point that frost inhibits proper soil segregation, Hiland will follow applicable winter construction guidelines as given in the following documents: North Dakota State University Extension Service, Publication R1728, "Successful Reclamation of Lands Disturbed by Oil and Gas Development and Infrastructure Construction," August 2014 and INGAA Foundation, Inc., Report No. 2013.04, "Planning Guidelines for Pipeline Construction During Frozen Conditions," December 2013.

Attachments:

North Dakota State University Publication R1728

INGAA Foundation, Inc. Report No. 2013.04

c. Lawrence Bender

Successful Reclamation of Lands Disturbed by Oil and Gas Development and Infrastructure Construction

Kevin Sedivec, Rangeland Management Specialist,
NDSU Extension Service

Carl Piper, Seed and Restoration Specialist,
Piper Land Resource Services, LLC

Jeff Printz, Rangeland Management Specialist,
Natural Resources Conservation Service

Abbey Wick, Soil Health Specialist,
NDSU Extension Service

Aaron Daigh, Soil Scientist,
NDSU School of Natural Resource Sciences

Ryan Limb, Range Scientist,
NDSU School of Natural Resource Sciences

NDSU EXTENSION
SERVICE
North Dakota State University, Fargo
October 2014

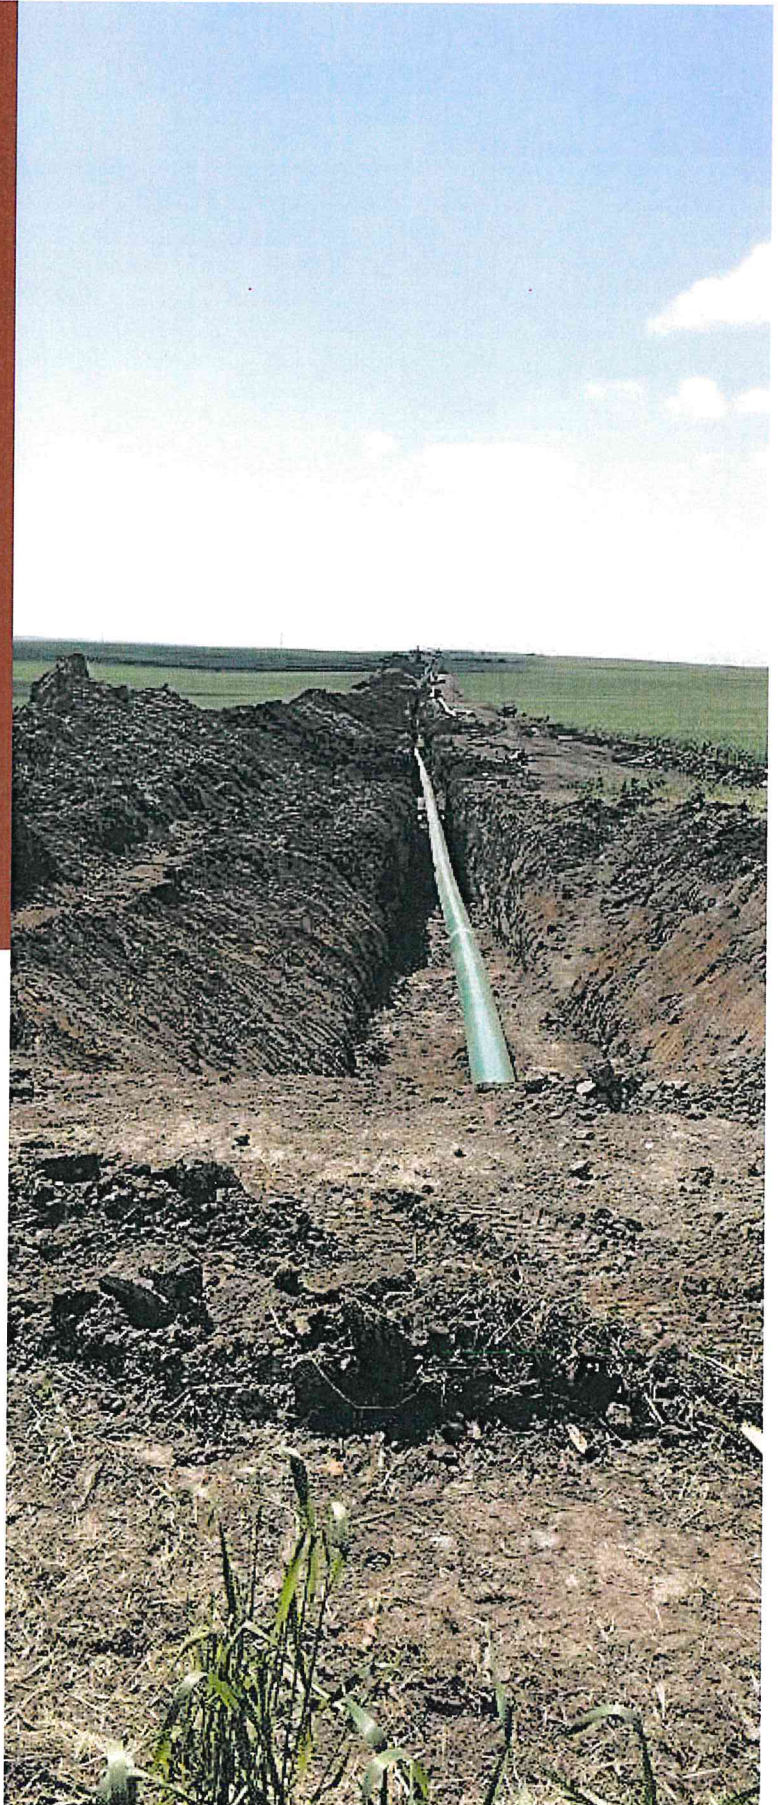


Table of Contents

Development of Reclamation Plan	3
Land Preparation	5
Pipeline and Narrow Disturbance	
Small Disturbance Areas Such as Pads, Access Roads and Other Construction Disturbance Areas	
Seed Mixtures and Rates for Rangeland	8
Pipeline, Access Roads and Other Narrow Disturbance Upland Site Grass Seed Mixtures	
Pipeline, Access Roads and Other Narrow Disturbance Upland Forb Seed Options (select three) to Seed With the Grass Seed Mixture	
Pipeline, Access Roads and Other Narrow Disturbance Wet Meadow, Saline and/or Sodic Site Seed Mixtures	
Small Disturbance Site Upland Forb Seed Options (select three) to Seed With the Grass Seed Mixture (well pads, staging areas, tower sites, pumping stations and other construction disturbance)	
Small Disturbance Site Upland Grass Seed Mixtures (well pads, staging areas, tower sites, pumping stations and other construction disturbance)	
Small Disturbance Site Wet Meadow, Saline and/or Sodic Site Seed Mixtures (well pads, staging areas, tower sites, pumping stations and other construction disturbance)	
Varieties/Cultivars/ECOVARS	
Conservation Reserve Program (CRP)	12
Hay Land Reclamation	
Tame Pasture Reclamation	
Right of Way	12
Seeding Dates	12
Erosion Control	13
Weed Control	15
Determining the Success of the Reclamation Project	15

This publication is designed to describe activities for the successful reclamation of North Dakota lands following disturbances associated with oil and gas production, and infrastructure construction. This includes topsoil/subsoil removal and replacement, well and pad development, pipeline and road construction, residential development and other activities related to the oil boom.

This publication only will address reclamation of non-contaminated soils. Contaminated soils may include lands compromised by oil spills (hydrocarbons) and brine spills.

We will introduce the critical components of a successful reclamation, provide recommended seed mixtures and seeding rates when reclaiming range and pasture land, and provide options to reduce soil erosion on disturbed rangelands, pastureland and hay lands. Although croplands are not specified directly in this publication, many of the topsoil salvage and replacement approaches, planning, preparation procedures and reclamation methods can be used as a guide to the successful reclamation of croplands.

These recommendations are designed for pipeline and small-area disturbance that may take place when developing infrastructure for oil and gas development, not for general agriculture and conservation restoration.

Development of Reclamation Plan

The goal for any reclamation project is to restore a site disturbed during the construction activities associated with oil and gas production to its pre-disturbance ecological structure and functions, as well as control erosion and sediment movement until the reclamation process is complete. The ecological structure and functions may include plant community integrity, watershed and water quality protection, wildlife habitat, retaining soil quality and productivity, and forage for livestock and wildlife.

What is important to understand is that minimizing the disturbance footprint before construction will provide a quicker return to the pre-disturbance conditions at a lower cost and with greater efficiency. A thorough, preconstruction inventory compiled by a botanist, certified professional in range management (CPRM), certified professional soil classifier or an experienced lay person with knowledge of soils, ecological sites, plant species and ecological function provides the basis for describing important functions of the land and setting clear objectives of the reclamation process.

This preconstruction inventory should include:

1. Clearly defined objectives and scope of the project. This will minimize the area that will be disturbed and reduce the construction footprint (area disturbed and severity of the disturbance).
2. Planning the reclamation and documenting the process prior to the disturbance. This document should be filed permanently for future reference.
3. Conducting a pre-disturbance/baseline inventory of the plant community, soils, topographic and landscape features. Photographs of the site provide valuable information. The **Web Soil Survey** can be used to provide an idea of the soil types found in area to be disturbed (however, a professional soil classifier will be needed to determine the actual soil types found on-site). Remember, the inventory should establish a framework for post-reclamation monitoring and evaluation.
4. Baseline inventory and documentation that includes 1) site-specific information and 2) on-site evaluation of ecosystem functions that need to be maintained or restored.



Components of existing, on-site information that need to be gathered for successful reclamation include:

1. Topsoil depth

The boundary between topsoil and subsoil material is determined based primarily on color (which indicates organic matter content), texture, pH and other properties that indicate suitable soil to support plant growth. The topsoil will contain remnant vegetative plant material and seeds that naturally occur and can help regenerate plant species that are present pre-disturbance. Topsoil is labeled at the "A horizon" in the Natural Resources Conservation Service (NRCS) **Web Soil Survey**. Determination and interpretation of soil pre-disturbance is completed by a certified professional soil classifier in North Dakota.

Clearly labeled stakes should be placed in the field indicating required depth to remove topsoil. Topsoil and subsoil must be removed in separate lifts and stockpiled in separate piles (for example, topsoil in one pile and subsoil in a separate pile) to reduce mixing soil layers when the reclamation process begins.

2. Properties of the subsoil and underlying materials

These properties should help identify any drainage issues and document water-holding capacity, allowing for the planning of erosion protection options; subsoil material has lower organic matter content than topsoil, making it typically lighter in color. It also may have a different texture than the topsoil material. Subsoil is referred to as the "B horizon" in the NRCS **Web Soil Survey**. Subsoil **never** should be placed or stored on top of topsoil. Consult your Soil Conservation District office or the Professional Soil Classifiers Associate of North Dakota for more information. Refer to North Dakota Century Code 43-36 for more information on soil classification and interpretation of soil properties.

3. Identification of vegetation and land use

Delineate land use (farmland, native rangeland, hay land, tame pasture, Conservation Reserve Program [CRP], etc.). Characterize the cover, productivity and plant community species' diversity and composition, including threatened or endangered species, watch species and sensitive species when working on federally owned lands.

4. Topography, landforms and surface water

These properties will affect post-disturbance functions to be restored and identify if a need occurs to develop storm water retention sites and erosion control techniques.

5. Wildlife habitat

Document wildlife species present through visual observation, fecal pellets, tracks, small mammal burrows or disturbances, and bird nests. Include any threatened or endangered species, watch species and sensitive species. Consult the North Dakota Game and Fish Department, U.S. Fish and Wildlife Service, U.S. Forest Service, U.S. Bureau of Land Management or any other agencies to identify species and critical habitat within or around the disturbed area. Pre-project clearances must be made with these agencies and/or corresponding agency prior to disturbance activities on public lands.

6. Archaeological and historical resources

Consult the North Dakota State Historical Preservation office for more information.

Land Preparation

The key to successful reclamation is to minimize the area of disturbance. This will reduce the cost of reclamation, allow adjoining areas to remain intact and help accelerate the recovery process.




Example of construction and reclamation of an access road during and after construction.



Pipeline and Narrow Disturbance

Take the following steps from the onset of construction to final recovery for successful reclamation in rangelands. Pipeline disturbances, particularly in croplands, can be identified decades after the disturbance, so take care to follow the appropriate reclamation guidelines.

1. Separate the topsoil from the subsoil.
 - a.) In areas where distinguishing the topsoil from subsoil is difficult, separate the top 8 inches of soil from the rest of the soil and treat it as topsoil. If you are unable to determine the depth of the topsoil, the **Web Soil Survey** (available online) is a useful tool for providing guidelines for topsoil depth. In all cases, a professional soil classifier can determine the depth of topsoil in the field.
 - b.) Do not mix topsoil and subsoil. Topsoil has biological, physical and chemical properties that are critical to recovery of the site.
 - c.) Store topsoil separately from the subsoil, either on the opposite side of the trench or with sufficient separation, to prevent the layers from mixing. Subsoil never should be mixed with the topsoil resource. Erosion control should be installed to ensure soil stays within the stockpile footprint. If stockpiles will remain longer than a growing season, seed the pile with a cover crop, or seed with perennial cover if the pile is to be retained for multiple years.
 - d.) If excavating below the subsoil or into different soil horizons, separate this soil from top- and subsoil so it can be backfilled at the base of the trench.

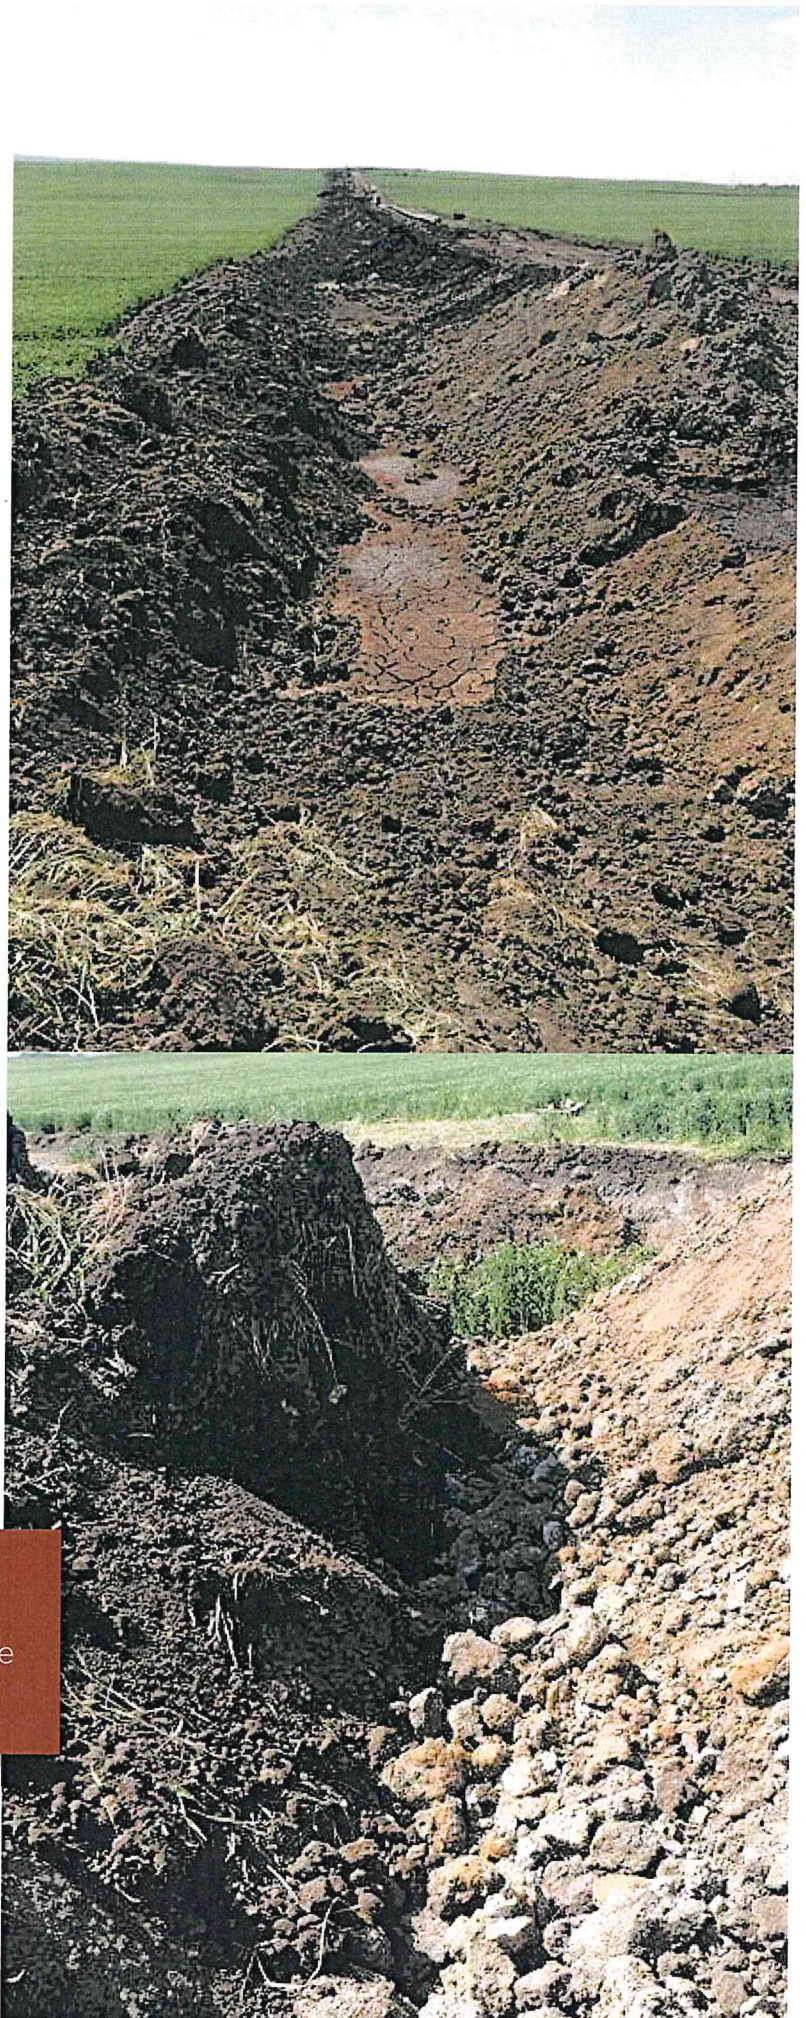

Top photo showing topsoil separated from subsoil. Bottom photo shows a close-up of the topsoil and subsoil separated during the exuviation process.


2. Replace the soil accordingly to the order in which the layers were removed.
 - a.) Replace the subsoil first without compacting the material, but make sure it is firm enough to prevent subsidence of material post-reclamation. Water will need to be able to move through this layer, so limiting compaction is key. Subsoil never should be placed over or mixed with topsoil.
 - b.) Replace the topsoil after the subsoil has been set in the trench. Bring the disturbance to desired grade. **Do not mix the topsoil and subsoil.**
3. A firm seedbed is critical for a successful seeding. Final soil preparation for seeding should provide a firm, relatively uniform seedbed that is not compacted. Loose soil will result in seed being planted too deeply, resulting in poor vegetative stand success, while areas with compaction will result in shallow rooting and poor plant survival rates. Agricultural practices for seedbed preparation should be used prior to seeding.
4. Identify areas of potential excess erosion risk and stabilize them accordingly.
 - a.) See the erosion control section of this publication.
5. Seed an appropriate seed mix approximately ¼ inch deep.
 - a.) Use drills equipped with depth-control bands.
 - b.) Hydro seeding, broadcast and harrowing or other seeding methods may be used as necessary.
 - c.) Rake in all fence lines, meters, stand pipes and other obstructions within the disturbance areas.
 - d.) Use high-quality clean and conditioned seed that has been tested for germination (germ) and purity.
 - e.) Buy seed on a pure live seed (PLS) basis.
 - f.) Calibrate and seed on an adjusted bulk seeding rate of PLS/(germ x purity). For example, 10 pounds/acre PLS with 85 percent germ and 90 percent purity = 13.07 bulk pounds/acre.

Non-native grasses and forbs can be invasive on native prairie. Clean equipment thoroughly after seeding non-native species to avoid transferring these species to areas where they are unwanted.

Small Disturbance Areas Such as Pads, Access Roads and Other Construction Disturbance Areas

These types of reclamation projects may be the focus of later restoration, often years or decades into the future, largely due to the compaction of the soil and mixing of topsoil and subsoil resources. Additional steps need to be taken to ensure these areas have the resources necessary to be preserved for remediation at that time.

Example of a small disturbance. Development and reclamation of a well pad in western North Dakota.



1. Strip topsoil and stockpile it in separate lifts for future restoration of the pad, road or other disturbance area at the end of its useful life. All topsoil should be salvaged per the depth determined by a professional soil classifier; this is your most valuable resource for successful reclamation. Topsoil should be stored separately from subsoil and, when possible, in shallow, wide piles. Stockpiles need to be stabilized to avoid erosional losses using re-established native grasses and/or erosion mats, even if it is for a "short" time period (less than one month). Retention of topsoil and subsoil resources in stockpiles is essential because top soil is a non-renewable resource.
2. Bring all slopes, roadways, sediment retainers and ditches to appropriate grade.
3. Replace subsoil first and then topsoil. As stated previously, you will want the subsoil to be firm but not compacted to allow for water movement into and through the subsoil material. Additionally, take care when replacing the topsoil to avoid destruction of soil structure and compaction upon replacement. The use of scrapers for this process can lead to compaction, so take care when using that type of equipment.
4. Final preparation for seeding should provide a firm, relatively uniform seedbed for seeding. Loose soil will result in seed being planted too deeply, resulting in poor stand success, while compacted soil will result in restrictive layers limiting root development. Agricultural practices to prepare the seedbed should be used.
5. Identify areas of potential excess erosion risk and stabilize them accordingly.
 - a.) See the erosion control section of this publication.
6. Seed an appropriate seed mix approximately ¼ inch deep.
 - a.) Use drills equipped with depth-control bands.
 - b.) Hydro seeding, broadcast and harrowing or other seeding methods may be used as necessary.
 - c.) Use high-quality clean and conditioned seed that has been tested for purity and germination.
 - d.) Buy and install seed on a pure live seed (PLS) basis.
 - e.) Calibrate and seed on an adjusted bulk seeding rate of PLS/(germ x purity). For example, 10 pounds/acre PLS with 85 percent germ and 90 percent purity = 13.07 bulk pounds/acre.

Seed Mixtures and Rates for Rangeland

We divided the state into three major areas for seed mixtures and separated them by major roadways (Figure 1). Major highways were used to simplify decision making for pipeline operators, engineers and contractors. The boundaries were delineated on general rangeland types and precipitation relative to a region.

Each section will have a recommended native rangeland seed mixture for *upland sites* and *wet meadow, saline and/or sodic sites* to apply on pipeline disturbance. Small disturbance sites will have a recommended native rangeland seed mixture for *loamy/clayey sites, thin loamy/shallow loamy/limy sites, sandy/sands sites, and wet meadow, saline and/or sodic sites*.

For the upland sites, select a minimum of three forbs/legumes from the recommended species list to complement the recommended grass-seeding mixtures. For the *wet meadow, saline and/or sodic sites*, select at least one forb species from the list that best fits the site.

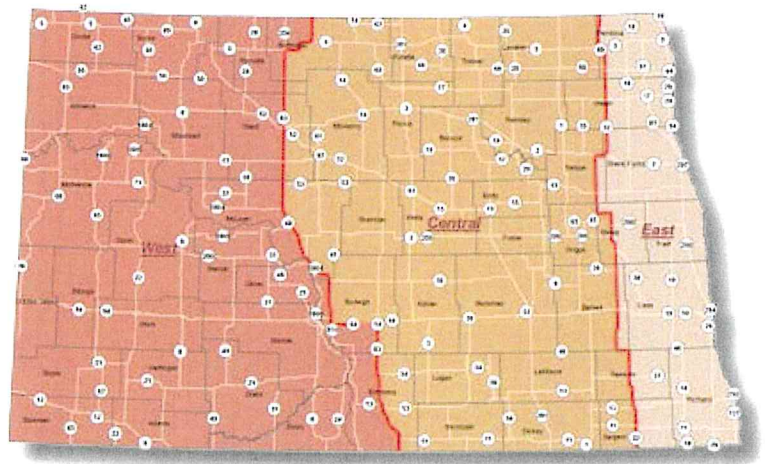


Figure 1. Location of west, central and east zones, with the boundary, to be used for recommended seeding mixtures and rates in North Dakota. The **West** is an area from the Montana border east to U.S. Highway 83, **Central** stretches from U.S. Highway 83 to North Dakota Highway 32 and the **East** lies east of North Dakota Highway 32 to the Minnesota border.

Government agencies may have more rigorous restrictions on seed cultivars, origins, seeding dates or other specifications than those listed here. Consult with the corresponding agency before designing and purchasing a seed mixture.

Applying fertilizer to native plant seeding is **not** recommended. Fertilizers enhance exotic grasses and annual weeds, reducing the success of the establishment.

Pipeline, Access Roads and Other Narrow Disturbance Upland Site Grass Seed Mixtures

Upland Mixture (loamy, clayey, sandy, sands, shallow loamy, thin loamy)

Grass Species	West*	Central*		East*
		PLS lb/ac ¹		
Western wheatgrass	2.5	2.5	2.5	2.5
Green needlegrass	2.0	1.5	1.0	1.0
Slender wheatgrass	1.5	1.5	1.0	1.0
Little bluestem	1.0	1.0	1.0	1.0
Prairie sandreed	1.0	1.0	0.5	0.5
Sideoats grama	2.0	2.0	2.0	2.0
Blue grama	0.5	0.25	0.25	0.25
Big bluestem	---	1.0	1.0	1.0
Switchgrass	---	0.25	0.5	0.5
Canada wildrye	---	1.0	1.0	1.0
Indiangrass	---	---	1.0	1.0
Total seed mixture	10.5	12.0	11.75	

¹ PLS = Pure live seed: Seeding rates are 1.5 times the normal seeding rate based on 30 seed/ft².

* West = west of U.S. Highway 83, Central = east of U.S. Highway 83 to North Dakota Highway 32, East = east of North Dakota Highway 32

Pipeline, Access Roads and Other Narrow Disturbance Upland Forb Seed Options (select three) to Seed With the Grass Seed Mixture

Upland Mixture (loamy, clayey, sandy, sands, shallow loamy, thin loamy)

Forb and Legume Species ²	North Dakota	
	PLS lb/ac ^{1,3}	
Purple prairieclover	0.1	
White prairieclover	0.1	
Purple coneflower	0.1	
Maximilian sunflower	0.1	
Blanket flower	0.2	
Black-eyed Susan	0.05	
Stiff sunflower	0.1	
Goldenrod	0.05	
Lewis flax	0.1	
Scarlet globemallow	0.05	
Prairie coneflower	0.1	

¹ PLS = Pure live seed: Seeding rates are 1.5 times the normal seeding rate based on 30 seed/ft².

² Select a minimum of three forb/legume species from the list. The seeding rate of three selected forbs/legumes at the prescribed rate will equal approximately 5 percent of the total mixture.

³ Drill calibration is critical when seeding low rates because seed may be expensive.

Pipeline, Access Roads and Other Narrow Disturbance Wet Meadow, Saline and/or Sodic Site Seed Mixtures

Wet Meadow, Saline/Sodic Mixture

Grass Species	West*	Central*		East*
		PLS lb/ac ¹		
Western wheatgrass	7.5	5.0	5.5	5.5
Slender wheatgrass	2.5	2.0	2.0	2.0
Prairie cordgrass	1.5	1.5	1.5	1.5
Inland saltgrass	0.5	0.5	0.5	0.5
Switchgrass	---	1.0	1.0	1.0
Total seed mixture	12.0	10.0	10.5	10.5
<hr/>				
Forb Species ² PLS lb/ac ^{1,3}				
Western yarrow	0.05			
Gardner saltbush ⁴	0.3			
Fourwing saltbush ⁴	0.45			
Lewis flax	0.1			

¹ PLS = Pure live seed: Seeding rates are 1.5 times the normal seeding rate based on 30 seed/ft².

² Select a minimum of one forb species from the list.

³ Drill calibration is critical when seeding low rates because seed may be expensive.

⁴ Gardner and fourwing saltbush should be used only on the saline/sodic sites.

* West = west of U.S. Highway 83, Central = east of U.S. Highway 83 to North Dakota Highway 32, East = east of North Dakota Highway 32

Small Disturbance Site Upland Grass Seed Mixtures (well pads, staging areas, tower sites, pumping stations and other construction disturbance)

Loamy and Clayey Sites			
Grass Species	West*	Central*	East*
		PLS lb/ac ¹	
Western wheatgrass	5.0	3.0	2.0
Green needlegrass	2.5	2.0	2.0
Slender wheatgrass	1.0	1.0	1.0
Side-oats grama	2.0	2.0	2.0
Blue grama	0.5	0.25	0.25
Big bluestem	---	1.0	1.5
Switchgrass	---	0.25	0.5
Canada wildrye	---	1.0	1.0
Indiangrass	---	---	1.0
Total seed mixture	11.0	10.5	11.25

¹ PLS = Pure live seed: Seeding rates are 1.5 times the normal seeding rate based on 30 seed/ft².

* West = west of U.S. Highway 83, Central = east of U.S. Highway 83 to North Dakota Highway 32, East = east of North Dakota Highway 32

Thin Loamy, Shallow Loamy and Limy Sites			
Grass Species	West*	Central*	East*
		PLS lb/ac ¹	
Western wheatgrass	2.5	3.0	2.0
Green needlegrass	1.5	1.5	1.5
Slender wheatgrass	1.5	1.0	1.0
Little bluestem	1.0	1.0	1.0
Prairie sandreed	1.0	1.0	1.0
Sideoats grama	2.0	2.0	2.0
Blue grama	0.5	0.5	0.25
Big bluestem	---	1.0	1.5
Total seed mixture	10.0	11.0	10.25

¹ PLS = Pure live seed: Seeding rates are 1.5 times the normal seeding rate based on 30 seed/ft².

* West = west of U.S. Highway 83, Central = east of U.S. Highway 83 to North Dakota Highway 32, East = east of North Dakota Highway 32

Sandy and Sands Sites			
Grass Species	West*	Central*	East*
		PLS lb/ac ¹	
Western wheatgrass	2.5	2.5	2.0
Needle-and-thread	2.0	2.0	1.0
Canada wildrye	1.0	1.0	1.0
Little bluestem	1.0	1.0	1.0
Prairie sandreed	1.5	1.5	1.0
Sideoats grama	2.0	2.0	2.0
Blue grama	0.5	0.5	0.25
Sand/Big bluestem	---	1.5	2.0
Total seed mixture	10.5	12.0	10.25

¹ PLS = Pure live seed: Seeding rates are 1.5 times the normal seeding rate based on 30 seed/ft².

* West = west of U.S. Highway 83, Central = east of U.S. Highway 83 to North Dakota Highway 32, East = east of North Dakota Highway 32

Small Disturbance Site Upland Forb Seed Options (select three) to Seed With the Grass Seed Mixture (well pads, staging areas, tower sites, pumping stations and other construction disturbance)

Forb and Legume Mixture (loamy, clayey, sandy, sands, shallow loamy, thin loamy, limy)	
Forb and Legume Species ²	North Dakota
	PLS lb/ac ^{1,3}
Purple prairieclover	0.1
White prairieclover	0.1
Purple coneflower	0.1
Maximilian sunflower	0.1
Blanket flower	0.2
Black-eyed Susan	0.05
Stiff sunflower	0.1
Goldenrod	0.05
Lewis flax	0.1
Scarlet globemallow	0.05
Prairie coneflower	0.1

¹ PLS = Pure live seed: Seeding rates are 1.5 times the normal seeding rate based on 30 seed/ft².

² Select a minimum of three forb/legume species from the list. The seeding rate of three selected forbs/legumes at the prescribed rate will equal approximately 5 percent of the total mixture.

³ Drill calibration is critical when seeding low rates because seed may be expensive.

Small Disturbance Site Wet Meadow, Saline and/or Sodic Site Seed Mixtures (well pads, staging areas, tower sites, pumping stations and other construction disturbance)

Wet Meadow, Saline and/or Sodic Sites			
Plant Species ^{2,3}	West*	Central*	East*
		PLS lb/ac ¹	
Western wheatgrass	8.0	5.0	5.0
Slender wheatgrass	2.0	2.0	2.0
Prairie cordgrass	2.0	2.0	2.0
Inland saltgrass	1.0	1.0	1.0
Switchgrass	---	1.0	1.0
Total grass seed mixture	13.0	11.0	11.0
Western yarrow	0.05	0.05	0.05
Gardner saltbush ⁴	0.3	0.3	0.3
Fourwing saltbush ⁴	0.45	0.45	0.45
Lewis flax	0.1	0.1	0.1

¹ PLS = Pure live seed: Seeding rates are 1.5 times the normal seeding rate based on 30 seed/ft².

² Select a minimum of one forb/legume species from the list.

³ Drill calibration is critical when seeding low rates because seed may be expensive.

⁴ Gardner and fourwing saltbush should be used only on the saline/sodic sites.

* West = west of U.S. Highway 83, Central = east of U.S. Highway 83 to North Dakota Highway 32, East = east of North Dakota Highway 32

Varieties/Cultivars/ECOVARS

Approved Named Varieties

Species	Recommended Varieties for North Dakota
	Origin of nonvarietal (common) native and introduced grass seed is limited to North Dakota, South Dakota, Nebraska, Montana, Wyoming, Minnesota and Canada

Introduced Cool-season Grasses

Meadow brome grass	Fleet, Paddock, Regar, Montana, MacBeth, Cache
Crested wheatgrass Standard	Nordan, RoadCrest, Summit
Fairway	Ephraim, Ruff, Parkway, Fairway, Douglas
Hybrid	HyCrest II, HyCrest, NU-ARS AC2
Intermediate wheatgrass	Reliant, Clarke, Slate, Chief, Oahe, Haymaker, Beefmaker, Manifest
Pubescent wheatgrass	Manska, Greenleaf

Native Warm- and Cool-season Grasses

Green needlegrass	Lodorm, AC Mallard, Fowler
Needle-and-thread	Common, AC Sharptail
Nuttall alkaligrass	Common
Porcupine grass	Common
Prairie junegrass	Common
Slender wheatgrass	Adanac, Pryor, Revenue, Primar, Firststrike
Western wheatgrass	Rodan, Walsh, Flintlock, Rosana, W.R.Poole, Recovery
Canada wildrye	Mandan
Big bluestem	Sunnyview, Bison, Bonilla, Bounty
Little bluestem	Badlands, Itasca
Blue grama	Bad River
Sideoats grama	Killdeer, Pierre, Butte
Indiangrass	Tomahawk
Prairie cordgrass	Red River
Prairie sandreed	Goshen, Bowman, Koch
Switchgrass	Dacotah, Forestburg, Sunburst, Summer

Native Legumes/Forbs

Species	Recommended Varieties for North Dakota
	Nonvarietal (common) native forbs and legumes will originate or be grown in North Dakota, South Dakota, Nebraska, Montana, Wyoming, Idaho, Washington, Oregon, Minnesota, Wisconsin, Iowa, Colorado and Canada

Native Legumes/Forbs

Black-eyed Susan	Common
Blanket flower	Common
Grayhead coneflower	Common
Narrow-leaved purple coneflower	Bismarck
Prairie (yellow) coneflower	Stillwater
Purple coneflower	Common
Canada goldenrod	Common
Missouri goldenrod	Common
Stiff goldenrod	Common
Lewis flax	Appar, Maple Grove
Maximilian sunflower	Medicine Creek
Purple prairieclover	Bismarck
Scarlet globemallow	Common
Stiff sunflower	Bismarck
Western yarrow	Great Northern
White prairieclover	Antelope

Introduced Legumes

Alfalfa ¹	Fall dormancy rating or winter survival index (WSI) of 3 or less ²
----------------------	---

Native Shrubs

Fourwing saltbush: Dewinged	Wytana, Snake River
Gardner saltbush	
Winterfat	Open Range
WY big sagebrush	Common

¹ A partial list of grazable-type alfalfas can be found in "Developing Alfalfa Adapted to Grazing in the Northern Great Plains," available at www.ag.ndsu.edu/archive/streeter/99report/berdahl99.htm.

² The following websites are approved for use in determining approved alfalfa varieties: www.alfalfa.org/ and www.maes.umn.edu/. Varieties should have a fall dormancy rating or winter survival index (WSI) of 3 or less. Note: Alfalfa varieties with a WSI of 2 or 3 may experience some winter kill. The origin of nonvarietal (common) alfalfa types is limited to North Dakota, South Dakota, Minnesota, Montana and Canada.

NOTE: Approved alfalfa varieties that may not be shown on these websites include Alogonquin, Anik, Blazer, Champ, Drylander, Grim, Ladak, Ladak 65, Prowler, Rambler, Rangelander, Ramsey, Ranger, Spredor 2, Teton, Travois, Vernal and Wrangler. Alfalfa varieties not listed here or shown on these websites will require documentation from the distributor or developer to determine suitability.

Conservation Reserve Program (CRP)

Seed CRP fields back to the predominant species found within the stand. Contact the local NRCS office for help with seed mixtures in your construction area. Some CRP is seeded to native species. Take care to seed all areas to appropriate species.

Hay Land Reclamation

Hay Land Sites			
Plant Species ³	West*	Central*	East*
		PLS lb/ac ¹	
Crested wheatgrass	3.0	---	---
Pubescent/Intermediate wheatgrass	4.0	3.0	---
Meadow brome grass	---	7.0	10.0
Alfalfa ²	4.0	3.0	5.0
Total seed mixture	11.0	13.0	15.0

¹ PLS = Pure live seed: Seeding rates are 1.5 times the normal seeding rate based on 30 seed/ft².

² Use alfalfa varieties with a fall dormancy rating of 3 to 4 and a winter hardiness rating of 2 to 2.5 when reseeding pure stands of alfalfa. Recommended seeding rates are 8 pounds/acre of PLS in the west, 9 pounds/acre of PLS in the central and 10 pounds/acre of PLS in the eastern portions of North Dakota.

³ These hay land recommendations are to be used as examples. Always consult with the land owner/manager and plant what he or she prefers or needs for future use.

* West = west of U.S. Highway 83, Central = east of U.S. Highway 83 to North Dakota Highway 32, East = east of North Dakota Highway 32

Tame Pasture Reclamation

Hay Land Sites			
Plant Species ³	West*	Central*	East*
		PLS lb/ac ¹	
Crested wheatgrass	4.0	---	---
Pubescent/Intermediate wheatgrass	5.0	6.0	6.0
Western wheatgrass	5.0	---	---
Meadow brome grass	---	15.0	15.0
Alfalfa ²	---	---	---
Total seed mixture	14.0	21.0	21.0

¹ PLS = Pure live seed: Seeding rates are 1.5 times the normal seeding rate based on 30 seed/ft².

² Use alfalfa varieties with a fall dormancy rating of 3 to 4 and a winter hardiness rating of 2 to 2.5 when reseeding pure stands of alfalfa. Recommended seeding rates are 8 pounds/acre of PLS in the west, 9 pounds/acre of PLS in the central and 10 pounds/acre of PLS in the eastern portions of North Dakota.

³ These tame pasture recommendations are to be used as examples. Always consult with the land owner/manager and plant what he or she prefers or needs for future use.

* West = west of U.S. Highway 83, Central = east of U.S. Highway 83 to North Dakota Highway 32, East = east of North Dakota Highway 32

Right of Way

Use specifications for Class II seed specifications in North Dakota Department of Transportation Manual Section 708.02B.

Seeding Dates

Recommended Seeding Dates

Species Type and Season of Planting	North Dakota
Cool-season Species	
Spring	Prior to June 1 ²
Late summer ¹	Aug. 1 to Sept. 1
Late fall (dormant)	See footnote ³
Warm/Cool-season Mix	
Spring	April 20 to June 15 ²
Late summer ¹	Not recommended
Late fall (dormant)	See footnote ³

¹ Weather and soil moisture conditions permitting. If soil moisture levels and forecasted precipitation amounts are not favorable, this time period of seeding is not recommended.

² Seeding may be extended with adequate soil moisture and when favorable precipitation and temperatures are forecast.

³ Seed after Oct. 10 when ground temperatures at a depth of 4 inches are 45 F or lower and cooler air temperatures are forecast.

Erosion Control

Erosion control devices may be utilized when site reclamation occurs outside the preferred seeding dates or when the topography of the site requires additional measures to enhance the restoration process.

In all cases, topsoil and subsoil stockpiles must be protected from erosional processes (wind and water), even if the duration of stockpiling is “short” (less than one month). Such protection certainly needs to be considered for long-term resource storage.

Spray-on covers such as mulching will help create a microclimate at the seed soil interface to promote germination while controlling erosion. Additional measures such as mats, which provide additional stability, may be used in higher-gradient areas or remote areas where access is limited.


Many erosion-control devices are available, and all are unique in some way. The best way to manage erosion is to evaluate the landscape as a whole, providing the proper controls based on need. For example, stabilizing the soil with mulch or crimping may control erosion and lessen the impact of raindrops or small sheet flows on a specific area (ditch bottom or pipeline trench).

But if your disturbed site is impacted from the surrounding landscape through runoff, other controls such as temporary berms, diversions or sediment fence diverting larger sheet flows from entering the site may be required. The area being protected may not be the only area impacting the erosion potential.

The North Dakota Department of Health’s Division of Water Quality (2001) states that erosion control is mandatory on all construction projects. Phase II of the National Pollution Discharge Elimination System (NPDES) will require projects disturbing areas larger than one acre to apply for a storm water discharge permit. These criteria will force smaller contractors who normally do not have to deal with temporary erosion control measures to install these devices.


This publication is intended to give all contractors, designers and inspectors the tools needed to properly install, maintain and implement their storm water pollution prevention (SWPP) plans. The proper use of best management practices (BMPs) will protect the environment and save the user time and money lost to erosion damage.

NOTE: For further information on erosion control, see **“A Guide to Temporary Erosion-Control Measures for Contractors, Designers and Inspectors”** published by the North Dakota Department of Health’s Division of Water Quality (June 2001), 1200 Missouri Ave., P.O. Box 5520, Bismarck, ND 58506-5520; www.ndhealth.gov/wq/wastewater/pubs/bmpmanual.pdf.

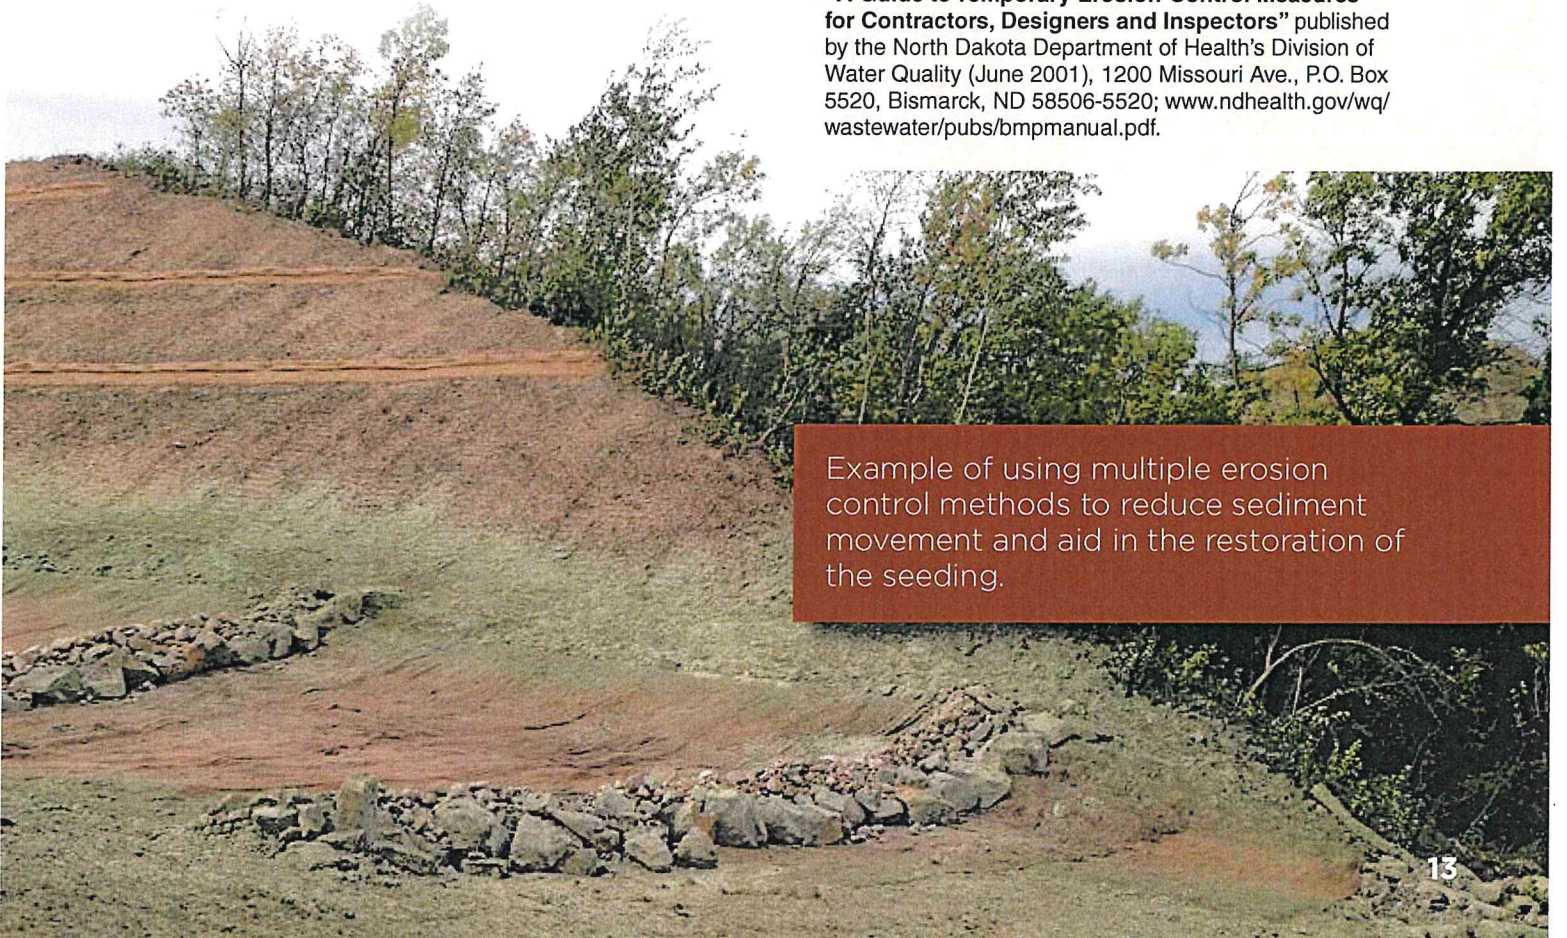


Example of using multiple erosion control methods to reduce sediment movement and aid in the restoration of the seeding.

Erosion control during the reclamation process

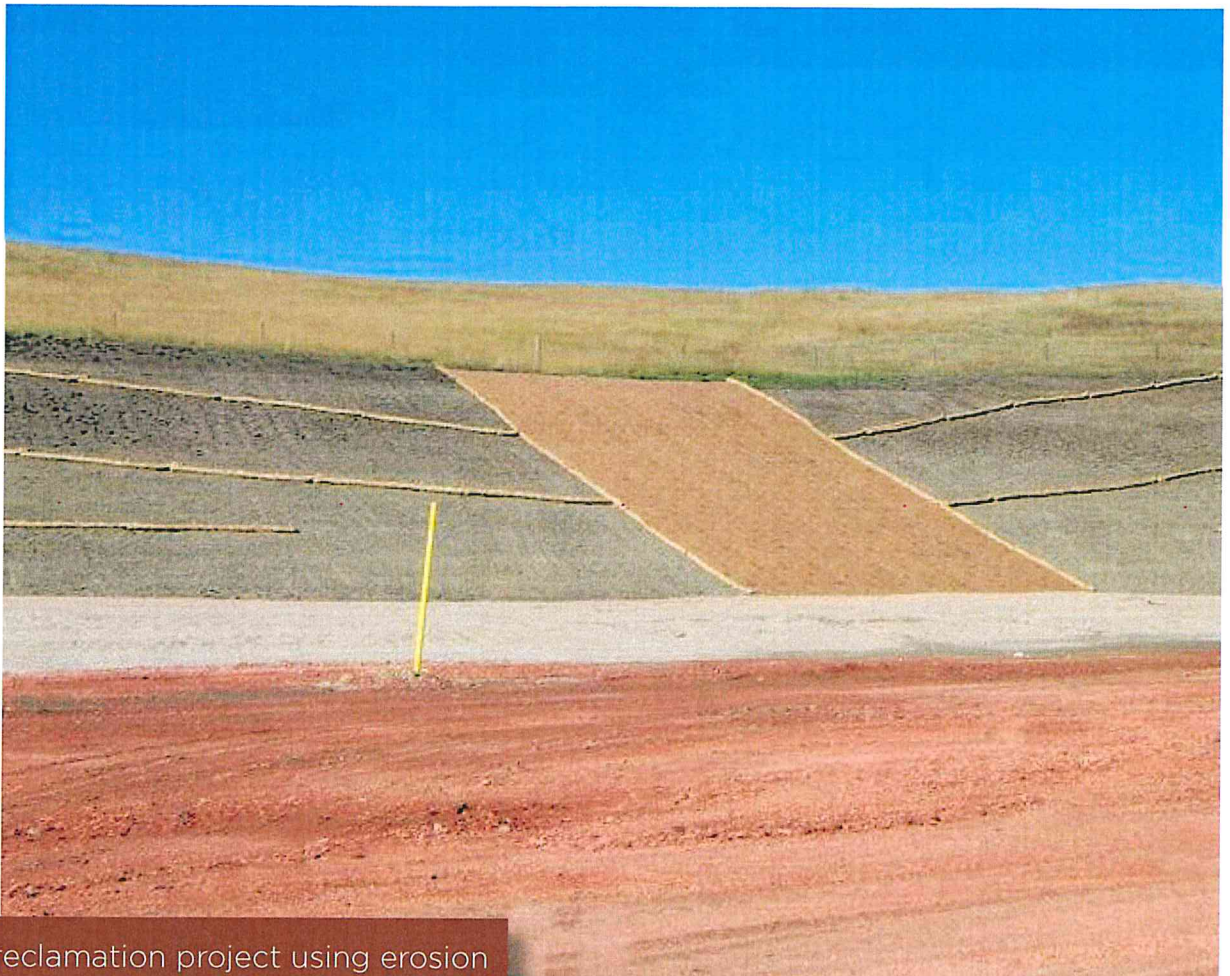

Example of a reclamation project using erosion control techniques, before and after photos.

Final restoration with erosion control structures removed

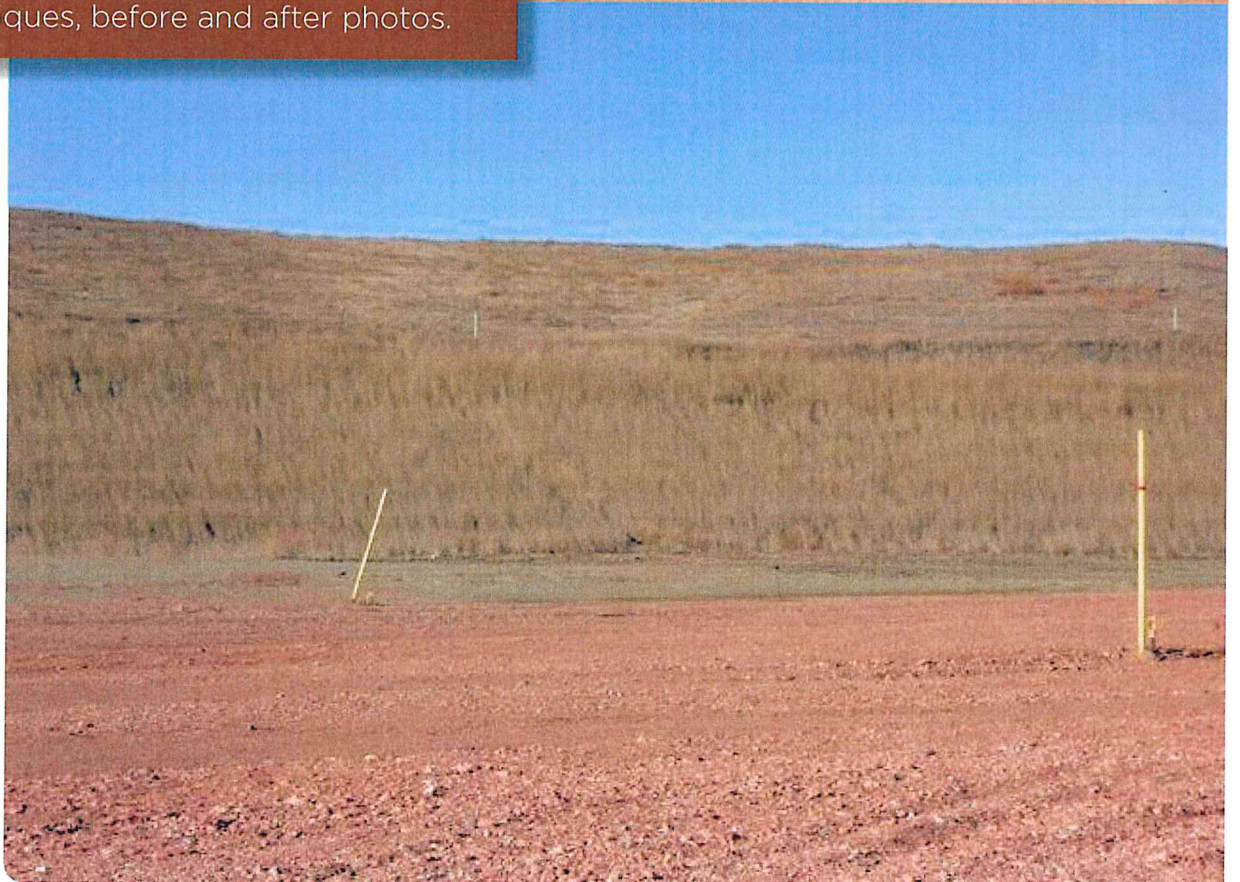

Weed Control

Weed control is essential for reclamation success. Annual broadleaf and grass weeds will be common during the year of implementation and second year after seeding. These annual weeds should not be a concern during the first growing season; however, mowing or chemical treatment (depending on seed mixture) to control seed development may be necessary during the second growing season. If the seed mixture contains broadleaf, legume or shrub plants, chemical control would not be recommended because the chemical also will damage the seeded plants.

NOTE: For further information on weed control, see the "North Dakota Weed Control Guide" at www.ag.ndsu.edu/weeds/weed-control-guides/nd-weed-control-guide-1. This publication is available through an app (NDSU Pest Management app). For weed identification and control, see "Identification and Control of Invasive and Troublesome Weeds in North Dakota" at www.ag.ndsu.edu/publications/landing-pages/crops/identification-and-control-of-invasive-and-troublesome-weeds-in-north-dakota-w-1411.

Determining the Success of the Reclamation Project

Disturbed areas should be monitored for a period of time and compared with adjacent, similar reference areas to document that revegetation has been successful. If revegetation is successful, soil structure and function likely also have been reclaimed to a level conducive for stabilization of long-term, desirable vegetative communities.

Developing and following a long-term monitoring plan is critical so problems can be identified and controlled early. Direct monitoring and comparisons with suitable reference areas will ensure that landowner commitments, private and public, have been satisfied and that all applicable regulatory requirements are met.

Pay close attention to topsoil and subsoil replacement depths, seeding success, noxious weeds and erosion. Topsoil and subsoil replacement depths can be determined by using a soil auger and looking for color change. Darker material relative to other soil materials should be on the surface. Seedlings from the seeded plant species should be noticeable in the first growing season, but the presence of annual weeds throughout is not unusual. Seeded plants should occur throughout the site and annual weeds still will be present by the second growing season.

A typical standard for successful revegetation is when the disturbed area has reached three to five established plants of replacement vegetation per foot², as specified in the seed mixture or compared with adjacent undisturbed areas. Noxious weeds, by law, must be controlled by pulling or spraying before they spread or produce seed.

While monitoring the reclamation process, identify any areas of instability or erosion. Uncontrolled wind and water erosion can degrade a reclamation project rapidly, destroying the integrity of the land and quality of water down slope. If erosion points are found and appear to be worsening, incorporate control measures that slow and divert runoff flow.

Erosion control best management practices that may be incorporated include successful stands of vegetation, wattles, silt fences, straw bales and trenches. Wind erosion is more difficult to evaluate than water erosion; however, if best management practices are implemented for water erosion control, wind erosion control is highly likely.



NDSU EXTENSION
SERVICE



All photos used with permission from Brenda Rettinger, Marathon Oil.

A special thank you goes to Energy & Environmental Research Center for their assistance in securing grant dollars that helped fund the program planning and production of outreach materials.

The NDSU Extension Service does not endorse commercial products or companies even though reference may be made to tradenames, trademarks or service names.

NDSU encourages you to use and share this content, but please do so under the conditions of our Creative Commons license. You may copy, distribute, transmit and adapt this work as long as you give full attribution, don't use the work for commercial purposes and share your resulting work similarly. For more information, visit www.ag.ndsu.edu/agcomm/creative-commons.

For more information on this and other topics, see www.ag.ndsu.edu

County commissions, North Dakota State University and U.S. Department of Agriculture cooperating. North Dakota State University does not discriminate on the basis of age, color, disability, gender expression/identity, genetic information, marital status, national origin, public assistance status, sex, sexual orientation, status as a U.S. veteran, race or religion. Direct inquiries to the Vice President for Equity, Diversity and Global Outreach, 205 Old Main, (701) 231-7708. This publication will be made available in alternative formats for people with disabilities upon request, (701) 231-7881.



The INGAA Foundation, Inc.

Planning Guidelines for Pipeline Construction During Frozen Conditions

Prepared for The INGAA Foundation, Inc.
By: Natural Resource Group, LLC
December 2013

INGAA Foundation Final
Report No. 2013.04





The INGAA Foundation, Inc.



PLANNING GUIDELINES FOR PIPELINE CONSTRUCTION DURING FROZEN CONDITIONS

TABLE OF CONTENTS

1.0	INTRODUCTION.....	1
2.0	PRECONSTRUCTION PLANNING	5
3.0	SNOW REMOVAL AND STORAGE	8
4.0	CROSSING WETLANDS AND WATERBODIES	11
5.0	UPLAND AREAS – TOPSOIL SEGREGATION, STORAGE, AND RESTORATION	17
6.0	WATER HANDLING (TRENCH DEWATERING AND HYDROSTATIC TESTING)	19
7.0	TEMPORARY EROSION AND SEDIMENT CONTROL MEASURES	22
8.0	FINAL STABILIZATION AND POST-CONSTRUCTION MONITORING	24
9.0	CONCLUSION	26

ATTACHMENT

Attachment A Frozen Construction Planning Guidelines Checklist

1.0 INTRODUCTION

PURPOSE

The INGAA Foundation has developed recommended guidelines that address winter season construction techniques under frozen conditions. The intent of these recommended guidelines is not to dictate one set of construction techniques for every project, but to provide an array of acceptable and proven techniques from which each Company can develop its own project-specific frozen conditions plan. The guidelines presented in this paper draw from the experience and leading best practices of the INGAA Foundation membership, interviews with industry practitioners (e.g., contractors, environmental inspectors, regulators), and reviews of construction plans for projects built under frozen conditions.

BACKGROUND



Pipeline Construction in Frozen Conditions

In a March 2013 report on United States natural gas pipeline capacity, the U.S. Energy Information Administration (EIA) noted that “more than half of new pipeline projects that entered commercial service in 2012 were in the Northeast.”¹ Elsewhere on the EIA’s website, data show that the number of producing gas wells in the United States has increased by 36 percent from 2001 to 2011.² This number includes an increase in producing gas wells of 36 percent in Pennsylvania and Colorado and 152 percent in North Dakota over the same

period. These numbers show an increase both in gas production and gas transportation activity in states that are prone to frozen conditions and frozen precipitation during the winter months.

Meanwhile, on May 31, 2013, the Federal Energy Regulatory Commission (FERC) issued a Notice of Availability³ of Final Revisions to the Upland Erosion Control, Revegetation, and Maintenance Plan (Plan) and the Wetland and Waterbody Construction and Mitigation Procedures (Procedures). Included in the revisions are a new section on winter construction and the FERC’s specific recommendations for the content of Winter Construction Plans, when

¹ EIA Report, “Over half of United States natural gas pipeline projects in 2012 were in the Northeast,” March 25, 2013. Accessed on August 17, 2013, at: <http://www.eia.gov/todayinenergy/detail.cfm?id=10511>.

² EIA Data. Accessed August 16, 2013, at: http://www.eia.gov/dnav/ng/ng_prod_wells_s1_a.htm.

³ FERC Docket No. AD12-2-000, May 31, 2013. Accessed on August 17, 2013, at: <http://www.ferc.gov/industries/gas/enviro/guidelines.asp>.

indicated for a given project. The FERC's recommendations recognize the increasing incidence of natural gas pipeline construction during winter months and under frozen conditions, especially in the northern, northeastern, and Rocky Mountain regions.



Pipeline Construction in Frozen Conditions

The INGAA Foundation recognizes that additional pipeline infrastructure will be constructed to service developing energy resource areas in the northern United States. Furthermore, owing to a variety of factors (e.g., certain restrictions for threatened and endangered species, migratory bird issues, aggressive service schedules, and the geographic concentration of construction activities), much of this construction is likely to occur during the winter months or under frozen conditions. While the FERC does not encourage or require winter construction, other federal agencies may recommend avoidance timeframes requiring interstate natural gas pipeline companies (Company/Companies) to construct in frozen conditions for the purpose of minimizing impacts to the environment. However, winter

conditions such as snow fall, frozen soil, and sub-freezing ambient air temperatures have the potential to impact pipeline construction activities. Good planning can help avoid, reduce, or minimize those impacts.

To that end, the INGAA Foundation has chosen to use certain terminology based on broad standards of use and acceptance in the pipeline construction field, rather than adopting regulatory terms of art. In this document, the INGAA Foundation has chosen to use the phrase "frozen conditions" as opposed to "winter conditions" based on the fact that winter conditions vary throughout the United States, and that the majority of construction issues under non-frozen conditions, whatever the season, are already addressed in the FERC's Plan⁴ and Procedures⁵. The INGAA Foundation recognizes that the FERC's new guidance regarding Winter Construction Plans broadly refers to "winter weather conditions"⁶ and "winter construction procedures (e.g., snow handling and removal, access road construction and maintenance, soil handling under saturated or frozen conditions, topsoil stripping)."⁷ However, for the purposes of these guidelines, the term "frozen conditions" is used as the basis of the following discussion and assumes the presence of frozen soil or frozen precipitation and the unique construction

⁴ FERC Upland Erosion Control, Revegetation, and Maintenance Plan, May 2013 Version. Accessed on August 9, 2013, at: <http://www.ferc.gov/industries/gas/enviro/Plan.pdf>.

⁵ FERC Wetland and Waterbody Construction and Mitigation Procedures, May 2013 Version. Accessed on August 9, 2013, at: <http://www.ferc.gov/industries/gas/enviro/procedures.pdf>.

⁶ Id at p. 6.

⁷ Id.

techniques and other measures used under such conditions. In addition, these guidelines apply generally to winter construction in northern states, as well as other states that experience frozen conditions for shorter periods of time (e.g., the Rocky Mountain states).

Recently, a number of interstate pipeline projects (i.e., El Paso Corporation's Ruby Pipeline, Dominion's Appalachian Lateral, Alliance Pipeline's Tioga Lateral, and Tennessee Gas Pipeline Company's 300 Line) have either planned for or unexpectedly found themselves performing pipeline construction activities under frozen conditions due to permit requirements or construction delays. The recent increase in overall construction activity could result in more projects scheduling construction during frozen conditions as Companies seek to avoid biological timing restrictions (e.g., migratory bird nesting and fish spawning seasons) and to minimize competition for labor, materials, and equipment. The INGAA Foundation acknowledges that, while construction under frozen conditions can minimize selected impacts, it can also result in other impacts and challenges that are not faced during the warmer months.

After identifying the need for industry guidance regarding construction under frozen conditions, the INGAA Foundation convened a steering committee comprised of INGAA staff and INGAA member organizations representing energy companies and construction contractors. The INGAA Foundation wishes to thank the following members of the steering committee for their time and expertise:

Monica Howard	Energy Transfer Partners
John Cassady	TransCanada Corporation
Farrah Lowe	NiSource, Inc.
Tim Powell	Williams Companies
Terry Delasalle	Greene's Energy Group
Greg Bosch	Mears Group, Inc.
Lisa Beal	INGAA
Terry Boss	INGAA
Richard Hoffmann	The INGAA Foundation
Ron Miller	Basic Systems, Inc.

The INGAA Foundation contracted with Natural Resource Group, LLC (NRG) to prepare the guidance document. The steering committee and NRG participated in regular conference calls to identify the direction and format of the resulting document. NRG conducted a review of existing Winter Construction Plans prepared for pipeline projects in various locations across North America. The plans included those that are publically available as part of projects that are regulated by a government agency, such as the FERC, and plans submitted to the steering committee from the INGAA membership. NRG conducted interviews with representatives from energy companies, pipeline contractors, environmental inspectors, and federal and state regulatory agency personnel to identify issues and best management practices (BMPs) associated with pipeline construction under frozen conditions. Following identification of the issues and BMPs, the INGAA Foundation sponsored a workshop held in Washington, DC. The purpose of the workshop was to reach a wider group of industry and agency representatives and solicit their input on the opportunities, challenges, and solutions for

The INGAA Foundation identified that, with the increase in pipeline construction in frozen conditions, the industry could benefit from having guidelines that address the unique challenges of construction under frozen conditions by pipeline designers, construction companies, operators, and regulators.

pipeline construction under frozen conditions. Thirty-seven people attended the workshop including 19 representatives from energy companies, 9 representatives from federal regulatory and land management agencies, 5 representatives from environmental and engineering service companies, 2 representatives from pipeline construction contractors, and 2 representatives from the INGAA Foundation. The information gathered during the research phase and from the workshop was compiled into this guidance document.

The guidelines presented herein focus on construction and environmental protection practices unique to frozen conditions. These guidelines primarily focus on providing additional information to Companies regarding what to consider when developing a project-specific frozen conditions plan and what past practices have been successful under frozen conditions. In this way, the guidance presented in this document may also be used by Companies to develop project-specific plans based on each project's unique location, timing, and other variables.



Snow Removal From Trench

This paper is structured to first present a general discussion of the issues (i.e., preconstruction planning, snow removal and storage, crossing of wetlands and waterbodies, upland topsoil segregation, excavation and backfilling, water handling, temporary erosion control measures, and site stabilization and monitoring) to be considered when developing a project-specific frozen conditions plan. Following the general

discussion of issues, specific elements are presented that a Company can consider adopting when developing a project-specific frozen conditions plan. Each project will vary in the level of detail and considerations necessary for each due to the topography, location, climate, and other variables that can impact construction techniques. Finally, to assist a Company in the planning process, Attachment A contains a checklist that could be used in developing a reasonable and comprehensive frozen conditions plan.

2.0 PRECONSTRUCTION PLANNING


Due to increasing regulatory scrutiny of pipeline construction completed during frozen conditions and the rising likelihood that pipeline construction may occur during frozen conditions, it is important that Companies plan early for such conditions on their own projects. Project procurement personnel need to plan for the acquisition of materials to be used during frozen conditions, and construction crews need to understand their responsibilities in implementing special measures for frozen conditions, and when such measures should be used. In addition, project planners also need to be realistic about the slower pace of construction during frozen conditions in determining overall project schedule.

PRECONSTRUCTION ELEMENTS TO CONSIDER IN DEVELOPING A FROZEN CONDITIONS PLAN

Defining Frozen Condition: A company should consult with the project's primary regulatory agencies in order to fully understand how "frozen conditions" will be defined in each agency's permits. Once the broadest definition of frozen conditions has been established, the next step is to incorporate a clear definition of frozen conditions into the project's early planning documents. By engaging the agencies early in the process and incorporating clear definitions into the project's construction plans and schedule, Companies will avoid delays in project completion and potentially permit violations.

Project Schedule and Timing: A Company should take into account the project schedule, as well as the potential for significant schedule changes, and incorporate project flexibility into its plans to avoid unanticipated frozen conditions during construction. Construction contractors can be involved early in the development of the frozen conditions plan as they are a knowledgeable source of information.

When developing a project-specific frozen conditions plan, it is important to define the conditions or timing under which the plan would be implemented. Some Companies set specific calendar dates as to when the frozen conditions plan will be implemented while other Companies prefer to set ambient air or soil temperatures, depth of soil freezing, or moisture content of soil as the threshold for when to implement the plan.

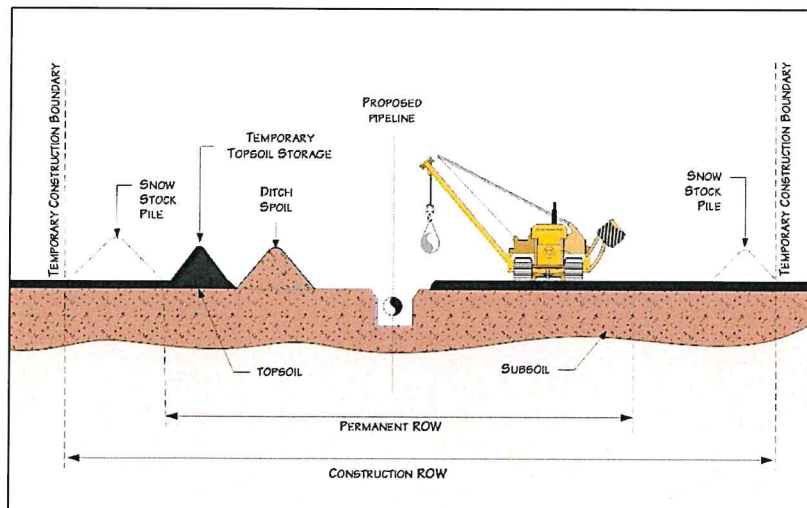

Typical Construction Right-of-Way in Frozen Conditions

Companies who advocate that a set time period is the most effective method note that it ensures that erosion control devices will be installed prior to soils becoming frozen and using materials and procedures that are able to withstand frozen conditions and runoff from snow melt.

In addition to or in the absence of direct guidance from a project's primary regulatory agencies, the INGAA Foundation recommends that Companies consider developing and implementing a frozen conditions plan when any of the following conditions could occur in the project area:

- sustained cold temperatures occur that result in the soil freezing to a depth of 1 to 2 inches or more;
- backfill material could freeze to the extent that adequate compaction becomes difficult;
- topsoil stockpiles could freeze and cannot be uniformly redistributed across disturbed areas or separated from the sub-grade material;
- snow accumulations are great enough to prevent visual observation of the construction work area; or
- historical conditions in the region indicate that significant runoff from spring snow melt may require additional measures.

Communication: As with all plans implemented on a construction project, constant communication among Company representatives and contractors, and in some cases the regulators, will ensure the greatest success for construction, operation, and restoration of a project area. Each plan should identify the chain of decision making that will occur on a day-to-day basis for determining the construction practices that can occur in any one area.

A decision-making chain is necessary for determining if work on the construction right-of-way should occur in frozen weather conditions due to changing conditions.



Shaker Equipment Backfilling Trench

For example, in regions where there is shallow freezing that occurs in the morning and evening followed by a daytime thaw, different activities may be approved or restricted by a project manager or construction supervisor, depending on the time of day. An agreed upon process in the pre-planning phase will assist in the project's successful completion.

3.0 SNOW REMOVAL AND STORAGE

Significant snow fall events before or during construction can create unsafe work conditions and make it difficult to complete the job properly. Removal of snow from the construction workspace may be necessary to provide safe and efficient working conditions and to expose soils for grading and excavation. Snow may also need to be removed along access roads to allow safe access to the right-of-way.



Snow Covered Right-of-Way

Snow may be used for beneficial uses, such as insulation over the trenchline prior to excavation, if practical, or to reduce frost penetration along the trenchline (see Section 6.0, Excavation and Backfilling). Snow can also be used to build frost roads through wetlands and other saturated or otherwise unstable areas (see Section 4.0, Crossing Wetlands and Waterbodies).

SNOW REMOVAL ELEMENTS TO CONSIDER IN DEVELOPING A FROZEN CONDITIONS PLAN



Preparing the Right-of-Way

Advance Planning with the Landowner:

Prior to construction, land agents should address snow removal and storage with landowners. Items to discuss with landowners include snow removal equipment, snow storage areas, and existing features (gates, fences, etc.). In the pre-planning phase, it is recommended that land agents identify and gain landowner approval for extra area off the approved right-of-way and along access roads to allow snow storage. Previous projects in northern climates have used additional

workspace areas as well as off-right-of-way yards for snow storage. Such areas should occur regularly along the right-of-way and be sized accordingly to handle at least the area's average snowfall amounts for the given time period.

The installation of temporary gates at livestock fence crossings should occur prior to or concurrent with snow removal activities and in accordance with landowner requirements to allow vehicle access through these areas for snow removal activities, while maintaining the function of livestock enclosures.

Snow Removal Equipment: The frozen conditions plan should identify the equipment acceptable for snow removal. Snow is typically bladed or pushed off the access roads and right-of-way with a motor-grader, snowplow, or bulldozer and then stockpiled along the outer portions of the construction right-of-way or extra workspace areas. Note that the FERC requires that stockpiles remain within approved workspaces, which may result in the need for additional workspaces specifically for snow storage. There is the expectation that the workspaces for snow storage would not be cleared or graded; however, they should have survey clearances and approvals for use as vegetation or ground disturbance could occur.

Snow removal activities should be monitored by the Environmental Inspector.



Equipment Modified With a Shoe

Snow could also be blown off the right-of-way using industrial blowers. The blown snow should be spread evenly to minimize damage to woody vegetation or other resources off the right-of-way.

An environmental inspector should be present to monitor snow removal activities. If not monitored, snow removal equipment can inadvertently scrape off or blow away underlying soil and vegetation. Contractors have identified that bladed equipment on the motor-grader, snowplow, or bulldozer could be fitted with a "shoe" to minimize impacts on the underlying soil and vegetation. Snow blowers can also be calibrated to avoid removal of topsoil beneath the snow.

The plan should specify if equipment modifications (e.g., installation of shoes) will be used to prevent topsoil or vegetation removal. The FERC will allow snow to go beyond the approved workspaces, if the material is being blown or lifted in buckets in a manner that avoids entrainment of soil and vegetation.

Signage: The frozen conditions plan should address the type, location, and placing of proper signage for designated avoidance areas, such as cultural resource sites or protected species habitat areas located adjacent to the construction workspace, to prevent inadvertent damage during snow removal activities. Consider the need for high visibility signage in areas where winter recreation activities (e.g. snowmobiling) and low contrast visibility could create safety hazards. Frozen ground conditions should be anticipated and signs placed in advance.

Snow Storage: The plan for snow storage within the right-of-way should clearly separate snow from spoil storage to avoid mixing. Consider the placement of stockpiled snow to ensure that snow melt will not cause erosion and sediment loss. The plan should consider specifying placement of gaps in stockpiled snow piles based on an assessment of drainage patterns to allow water to drain off the right-of-way during spring thaw and to allow for landowner and wildlife access across the right-of-way. Such measures can also be incorporated into the project's Stormwater Pollution Prevention Plan (SWPPP) in order to account for the best locations for snow stockpiles and gaps in relation to suitable erosion control materials prior to the onset of frozen conditions. Access roads can act as a conduit for the concentrated flow of melt water with the potential to create safety hazards or result in impacts on sensitive resources. Erosion control devices and diversion berms should be installed within the construction right-of-way and along access roads in accordance with the project's SWPPP or other applicable plans.

Erosion control devices should be installed on access roads that can provide a conduit for the concentrated flow of melt water.

4.0 CROSSING WETLANDS AND WATERBODIES

Construction through wetlands and other wet areas presents its own unique challenges, such as wheel rutting and mixing of soils, impacts to plants and other species, and downtime from construction equipment becoming stuck in loose or saturated soils. The following elements contribute to the challenges inherent in crossing and restoring wetlands and waterbodies and are addressed in this section: soil types, extent of freezing, topsoil segregation requirements, open ditch limitations, and trench subsidence and crowning.



Segregating Frozen Topsoil Layer in Wetland

WETLANDS AND WATERBODIES – ELEMENTS TO CONSIDER IN DEVELOPING A FROZEN CONDITIONS PLAN

Frost/Ice Roads: The linear nature of pipelines can make it impractical to avoid all difficult construction areas such as large, shallow standing water wetlands, peat bogs, tamarack or black spruce swamps, and saturated or otherwise unstable soils. Construction across these types of features can be accomplished during frozen conditions using frost or ice roads to provide additional equipment support. In addition, frozen conditions can also make environmentally sensitive areas less susceptible to damage.

Equipment Bridges: Equipment bridge installation and removal should be considered during the project planning stage, taking into account high water levels during the spring melt. There are two options for frozen conditions, either to remove the bridge prior to the onset of frozen conditions or to plan to install the bridge to a height that will not impede spring run-off. Because many agencies have restrictions on leaving equipment bridges in place through the frozen months, a review of the project permits should be conducted prior to finalizing the plan.

Soils: The type of wetland soils encountered can affect the feasibility of construction during frozen conditions. For example, wetlands with deep organic soils can generate heat through natural decomposition, making it difficult to freeze the soils unless long periods of sub-zero temperatures occur and proper frost road techniques are implemented. Conversely, deep frost in wetlands with a shallow organic layer over mineral soils can result in the upper organic layer being frozen to the subsoil, making topsoil segregation difficult.

Preconstruction planning, which could include soil borings prior to construction, will provide information to evaluate site-specific soil conditions expected during construction. Appropriate alternative techniques could be identified for use at the time of construction to limit the potential for soil mixing.

Topsoil Segregation: Prior to trench excavation, snow can be piled over the trenchline to form an insulating barrier and prevent deep frost penetration. The stockpiled snow is then removed just prior to excavation to prevent mixing of the snow with the topsoil material. It should be noted that projects have encountered trench wall stability issues using this technique, especially where there are unconsolidated soils beneath the frost layer. Careful planning and implementation should be followed to reduce the risk of trench wall instability.



Ditching Machine

Projects have also incorporated the use of specialty equipment to excavate the ditch where a deep frost layer has formed. Special equipment such as rock saws have been used to cut through the frost layer on either side of the ditch line. The frozen block of material is then removed from the ditch line and segregated from all other excavated materials, similar to standard topsoil segregation techniques used in upland construction. This frozen block of soil

contains the topsoil to be restored during backfilling. Other techniques that have been used during frozen conditions include rotary wheel trenchers equipped with rock buckets to segregate the top 1 foot of topsoil into a pile, followed by a second pass to excavate the subsoil. Once the frozen layer is removed, trenching may also be completed using conventional removal with excavators.

Open Trench or Ditch: The longer time that excavated materials from the trench are exposed to freezing ambient air temperatures, the more difficult it can become to properly backfill the trench with these materials. Where significant freezing of the spoil material has occurred, the backfill material will tend to be larger, angular blocks. If not broken into smaller pieces prior to backfill, these large blocks can create significant voids in the backfill, causing trench subsidence following spring thaw. This may give the perception that there is significant excess spoil material left after trench backfill is completed.

Large, angular frozen backfill material can cause subsidence of the trench following thaw due to air cavities in the backfill.

Rather than removing the “excess” material, a slight crown could be created over the trench line. As the backfill material thaws in the spring and summer, the large frozen soil clumps begin to break apart and collapse into void spaces, resulting in subsidence of the material, ranging from a couple of inches to greater than a foot in depth. There is potential that the original crown may not completely recede to the surrounding contour, requiring additional grading. However, this is preferable to removal of the “excess” material resulting in a lack of enough native material available to correct the subsidence.

Another issue that has occurred during construction in frozen conditions is that wetland spoil material with high water content (e.g., non-cohesive soils) can freeze to the ground surface in its storage location. This can result in difficulties retrieving the material for backfill as well as restoring the area to proper grade and elevation.

Minimizing the amount of open trench during frozen conditions reduces the risk of freezing excavated spoil materials. Projects have limited the pace of excavation activities to the length of ditch that can be excavated, the pipe lowered in, and fully backfilled within a specified period of time (ranging from 24 to 72 hours). Projects have also stripped off outer layers of a frozen spoil pile to use unfrozen inner subsoil first during backfilling. Remaining frozen subsoil is broken into smaller pieces prior to backfilling to reduce the size of voids in the backfilled trench. Consider the use of specialized equipment to break up frozen backfill material to minimize future subsidence. Shaker hoes, rippers, and padding equipment may be useful to break up frozen backfill material. The deeper portions of the trench backfill material may be less frozen and more suitable to return to the trench first. The frozen backfill material should be set aside and placed on top of the backfilled trench or the trench backfilled with a crown.

Crowning to Mitigate Trench Subsidence: Crowning material over the trench or ditch line may be a suitable practice where trench subsidence is anticipated. The amount of crown needed to compensate for subsidence is difficult to estimate. Leaving a crown of insufficient volume will not fully account for subsidence and potentially alter wetland hydrology and vegetation growth by creating low spots. Leaving a crown that is too large can affect hydrology and surface drainage by forming a linear berm. In extreme cases, a crown that persists may result in establishment of upland vegetation within the wetland.

The crown should only be constructed directly over the backfilled trench with native material and should not extend out beyond the trenchline. Subsoil used to build the crown should not extend above natural surface grade. A crown should always be capped with native topsoil material to ensure elevations will be restored with topsoil at the surface. If the topsoil layer has been removed



Reducing Frozen Crown Over Backfilled Trench

as a block of frozen material, the blocks should be placed on top of the trench line as part of the crown and be pieced together to the extent practicable to prevent large gaps following thawing of the material. Small gaps should be left in the crown to allow for natural surface drainage before the material is fully settled during spring and summer thaw.

Monitor the trench for subsidence or excessive crowning as weather conditions improve.

Maintaining good records of conditions encountered during backfilling will help develop expectations of post-construction restoration requirements. Where the trench has been backfilled with frozen material, the company should monitor for subsidence and excessive crowning conditions. Probing of the backfilled material may be necessary to determine if frozen spoil persists prior to conducting crown remediation. Some projects have attempted to remediate what appears to be an excess crown before the backfilled material was completely thawed, resulting in a subsided trenchline after remediation.

Final restoration of wetlands should be completed to the maximum extent practicable during frozen conditions as access to complete additional remediation following spring melt may be limited. Where additional remediation is required to address excess crown or subsidence, proper topsoil segregation would be necessary. Completing this remediation work during non-frozen conditions may require specialty equipment, such as floatation (swamp) hoes. All techniques discussed in this section, including backfilling with frozen trench spoils, crowning to mitigate trench subsidence, and remediation of trench subsidence or excessive crowning, should be discussed with the appropriate regulating agencies prior to execution and incorporated into the project-specific frozen conditions plan when possible.

4.1 DEVELOPING FROST ROADS THROUGH WETLANDS

Frost or ice roads are used across wetlands where soil conditions may not be capable of supporting the weight of construction equipment during non-frozen periods. Frost roads can withstand greater vehicle loads as the formation of ice in the ground increases soil strength. Use of frost roads can be a less expensive alternative to other equipment supports such as timber mats. However, development of frost roads require sustained freezing weather conditions that allow for construction of the road as well as construction of the pipeline.

FROST ROADS THROUGH WETLANDS ELEMENTS TO CONSIDER IN DEVELOPING A FROZEN CONDITIONS PLAN

Plan Road Development: A plan should consider development of frost or ice roads after careful review of wetland resources along the route and in consultation with the jurisdictional permitting agency. Frost roads should be considered where conventional construction techniques are not feasible such as across large, deep, and/or saturated wetlands. If possible, the construction contractor should be involved in this process to define the project cost and schedule implications of creating

In general, frost roads are prescribed as a construction technique when wetland areas are so large, so deep, or so saturated (or all of the above) that conventional construction techniques are not feasible.

frost roads.

Right-of-Way Clearing: The amount of clearing needed prior to development of frost roads is dependent on the type of wetland crossed. In general, wetlands with saturated soils and/or standing water support fewer woody plant species, thus requiring less clearing activities. Wetland types such as tamarack bogs, cedar swamps, and scrub-shrub wetlands may require additional woody vegetation clearing. Temporary equipment mats or the use of low ground pressure equipment may be necessary to prevent rutting during the removal of trees and woody vegetation. Depending on project-specific conditions, clearing may be conducted prior to the onset of freezing conditions.

Construction of Temporary Frost Road: Development of frost roads should begin as soon as freezing conditions are sustained and there is sufficient frost or snow to support lightweight or low ground pressure equipment. Small equipment, such as wide-track snowmobiles, can be used to begin packing snow along the designated haul route, which reduces its insulating properties. Snow and herbaceous vegetation can act as an insulating blanket, preventing or slowing frost development.

Typically, a minimum of 30 inches of frost is needed to support the size of equipment necessary for installation of a 36-inch-diameter pipeline.

As frost is driven deeper into the haul road, progressively larger and heavier equipment is brought in to continue to drive frost deeper into the subsurface material. This process squeezes soil moisture closer to the surface, where it is exposed to freezing temperatures. The depth or thickness of the frost road depends on the type of equipment that will utilize the road. For instance, the typical equipment required to construct a 36-inch-diameter pipeline, would generally require 30 inches of compacted frost.

Once the appropriate depth of frost is reached to support equipment associated with construction of the pipeline, efforts to maintain the frost road may be reduced, depending on site conditions and sustained freezing temperatures.

Water trucks may also be used to spray the frost road and build up the frozen layer. These activities are typically conducted around the clock to take advantage of the coldest hours of the day until such time as the frost road is determined to be suitable for pipeline construction. Note that soil temperatures can change even during cold weather months. A thawing of the frost road could result in limited access and a reduced ability to avoid impacts to sensitive resources, which may prompt the need to install construction mats.



Building the Ice Road

Once the frost road is established, it should be maintained by removing or compacting additional snowfalls to prevent development of an insulating cover as well as to maintain equipment travel. A layer of snow should be kept on the frost road to reflect the sun's energy and minimize thawing during warmer periods of the day. Darker areas of exposed soil can absorb heat and accelerate thawing, reducing the length of time the frost road can be safely used. Bare spots should be covered with snow as soon as possible.

5.0 UPLAND AREAS – TOPSOIL SEGREGATION, STORAGE, AND RESTORATION

Frozen soil conditions in upland (unsaturated, non-wetland) areas can create a firm working surface with a low potential for topsoil mixing. Planning to construct over frozen soils could be a factor in determining how large of an area over which to segregate topsoil. However, frozen conditions are not always consistent and intermittent thaws can occur depending on the location or annual variations in cool season temperatures. Construction or restoration work could extend into the spring thaw period due to unanticipated schedule slowdowns or an unseasonably early thaw period.



Topsoil Frozen to Subsoil

UPLAND AREAS – ELEMENTS TO CONSIDER IN DEVELOPING A FROZEN CONDITIONS PLAN

Be aware of seasonal road restrictions and load limits that may affect access to the right-of-way.

Construction Schedule: The average duration and intensity of frozen conditions in the project region should be considered early in project planning and scheduling. In areas with short periods of frozen conditions, minor workarounds to avoid managing frozen topsoil until adequately thawed is preferred. Regions with longer periods of freezing temperatures and deeper frost depths will require more deliberate planning for topsoil management and segregation. Consider that certain

state and local communities implement seasonal road restrictions and load limits that may affect the ability to move construction equipment and materials to the right-of-way. Long-term topsoil stockpiling to manage the topsoil and accomplish more effective seeding and restoration may be necessary after the spring thaw.

Topsoil Removal: Topsoil segregation should be completed prior to frozen soil conditions where practicable in areas with long periods of frozen conditions. When the topsoil is frozen at the time of topsoil stripping, multiple passes (vs. a single pass) with a bulldozer or other specialized equipment may be necessary to remove only the topsoil and not the subsoil. Specialized equipment (e.g., soil rippers) may be necessary to break up the topsoil prior to removal. An “Iron Wolf” or pavement grinder can remove frozen topsoil; however, the use of this method should be reserved for special situations and in cooperation with landowners and regulatory agencies because this process can affect the native soil structure.



Iron Wolf Breaking up Frozen Topsoil

During thaw periods, travel over topsoil can cause soil mixing resulting in work shutdowns, restrictions, or move-arounds.

Timing of Topsoil Restoration: The restoration of topsoil should ideally occur after both the stockpiled topsoil and the exposed subsoil have thawed, the ground has dried following the spring melt, and the soils are more easily worked. Proper timing of topsoil replacement can avoid the need to re-segregate topsoil from the trenchline should subsidence occur. During thaw periods, travel or use of equipment over topsoil may need to be suspended to avoid soil mixing. This could result in work shutdowns, work hour restrictions, move-arounds, or the use of construction timber mats. A longer wet period after the thaw could delay topsoil restoration, which would further delay permanent seeding and the establishment of vegetation. Such a wet period would increase the need for vigilance of erosion and sediment control measures to minimize the loss of topsoil and avoid discharges to wetlands and waterbodies.

The frozen conditions plan may need to include provisions for permanent seeding in the fall or following spring depending on the location, soil moisture conditions, and recommendations from land management agencies and the Natural Resources Conservation Service (NRCS). Right-of-way stabilization measures must be implemented regardless of whether topsoil restoration occurs under frozen conditions or is delayed. Some options for temporary stabilization of the right-of-way and segregated topsoil pile include mulching and dormant seeding.

6.0 WATER HANDLING (TRENCH DEWATERING AND HYDROSTATIC TESTING)

The management of water is an essential factor of pipeline construction. All new pipelines require the use of water to perform hydrostatic testing prior to placing the line into service. In addition, depending on such project-specific factors as geography, climate, and season, open trenches may fill with water from rain events or from the presence of groundwater. Water in the trench must often be removed (trench dewatering) to prevent the trench sidewalls from collapsing or otherwise to maintain trench or backfill integrity prior to or during pipe installation and restoration. All of these activities can become difficult at best, and dangerous at worst, during sustained frozen conditions.



Hydrostatic Test Water Discharge Structure

The Company should plan to identify the methods and materials necessary to address water handling specific to construction under frozen conditions.

Frozen conditions can disrupt hydrostatic testing in various ways. Pumps and other equipment like small-diameter pipes can freeze entirely in extreme cold. Water sources can become unavailable if frozen, and water discharges can be difficult to control if discharge areas are frozen, thereby slowing or preventing water from naturally seeping into the ground or, when allowed by permit, entering a surface waterbody.

Even during frozen conditions, groundwater can seep into an open trench, and rain water or melting snow can run into a trench from the surface, requiring dewatering prior to pipeline installation. Similar to standard summer construction, water in an open trench can prevent the trench from being inspected for obstructions and can affect the consistency of backfill material. During freezing conditions, ice can develop in the open trench. If the ice is not removed from the trench prior to backfill, the ice can create voids in the backfill material, which can result in significant backfill subsidence following spring melt. To address these issues, the company should plan and maintain sufficient means and devices with which to promptly remove and dispose of water entering the trench or other parts of the right-of-way or work area.

WATER HANDLING ELEMENTS TO CONSIDER IN DEVELOPING A FROZEN CONDITIONS PLAN



Trench With Frozen Infiltrated Groundwater

Equipment Care: Freezing conditions make operating equipment outdoors more difficult. Lubricants and other liquids in pumps can freeze up and not operate. Plans should consider measures to ensure equipment is protected from the elements and operational prior to use. When dewatering during freezing conditions, pumps may have to be installed in small, heated shelters to prevent the pumps from freezing and becoming non-operational or causing damage to the pumps that could result in a spill or leak of lubricants or fuel. The use of anti-freeze liquids in the pump housing is not recommended due to the difficulty of removing the potentially hazardous liquids prior to the re-use of the pumps.

When not in use, dewatering pumps and hoses should be properly drained during freezing conditions to prevent damage.

Discharge Rate and Volume: In areas where trench dewatering or test water discharges are occurring on top of frozen ground, the discharged water will not absorb into the ground, resulting in increased surface runoff and ponding in low lying areas. The increased runoff can melt and erode the upper layer of frozen soil, especially in areas where the water may become channelized. Discharged water can also flow underneath the snow, causing unobserved erosion and potentially, deposition in sensitive resource areas.

Similar to dewatering activities during standard non-frozen construction conditions, dewatering activities performed during frozen conditions should be continuously monitored and adjusted as necessary. Discharge locations should be carefully evaluated and selected based on site conditions including vegetation cover, soil type, and topography.

Structure Installation and Removal: Frozen conditions plans should consider installing dewatering structures (e.g., filter bags and straw bale structures) earlier in the construction process when ground conditions are favorable for installation. After periods of frozen ground conditions, installation of dewatering structures can prove to be challenging.

Removing dewatering structures promptly after final use will assist final clean-up of the project area. If not removed after use, these structures may freeze, preventing proper cleanup until spring. Locations of the filter bags placed off the right-of-way should be marked with lathe or similar methods to assist crews in relocating the filter bag for proper disposal.

Proper planning and communication with regulatory agencies with jurisdiction over water appropriation is important to successfully complete hydrostatic testing procedures.

Water Appropriation: Natural river flow levels are typically reduced in northern climate areas that have sustained temperatures at or below freezing for several months. These low-flow conditions can limit the rate and volume of water appropriation from natural water sources typically used for hydrostatically testing pipelines prior to placing the lines in service. If water is not available in the quantity or rate needed, alternate water appropriation sources may need to be located. Additionally, testing sections may need to be adjusted based on water availability and weather conditions.

Where testing will occur during low-flow periods, companies should discuss any appropriation volume or rate restrictions with the appropriate regulatory agencies.

7.0 TEMPORARY EROSION AND SEDIMENT CONTROL MEASURES

Temporary erosion and sediment control measures installed prior to or during frozen conditions may not remain functional under thaw conditions. This could be due to high flows of snowmelt during a quick warming period; the physical strains of intermittent freezing and thawing, including frost-heave; and the physical limitations of completing proper installation under frozen conditions.

Certain areas of the right-of-way may not be accessible during thawing periods or during the spring melt due to soft soil conditions, thus preventing regular inspections and hampering repairs or maintenance.



Erosion Control Devices With Protective Caps on Metal Stakes

TEMPORARY EROSION AND SEDIMENT CONTROL - ELEMENTS TO CONSIDER IN DEVELOPING A FROZEN CONDITIONS PLAN

Installation of Temporary Erosion and Sediment Controls: Companies should review the construction right-of-way in advance of frozen ground conditions and install the necessary temporary erosion and sediment control devices in advance of the changing weather. Advance placement will allow for the “keying” in of bales to the ground that will enable the devices to be more effective throughout construction. Consider the need to protect exposed soils from wind erosion. Frozen conditions may occur with little or no snow cover and exposed windrowed soils can be subject to drying winter winds leaving them susceptible to wind erosion.

Winter and Spring Thaw Inspection: In developing a project-specific frozen conditions plan, Companies should consider keeping an Environmental Inspector (EI) and environmental labor crew on site or on call through the periods of thaw to monitor erosion control structures and stabilization efforts and make adjustments or repairs as necessary and as right-of-way conditions allow. Stockpiles of materials should be suitably located within the project area to allow efficient repair and maintenance of erosion controls. Crews should have the proper equipment available to allow access to the right-of-way under soft soil conditions, such as all-terrain vehicles with oversized tires, to prevent rutting, topsoil mixing, and damage to other temporary erosion controls such as drivable berms.

Depending on the timing of the overall construction schedule and other limitations such as vehicle weight restrictions on public roads, the frozen conditions plan should address adequate crews to be available to conduct repairs or maintenance during thaw periods.

The project-specific frozen conditions plan should review language in stormwater permits and the FERC's Plan or the Company's own construction procedures regarding the frequency of erosion control inspections and the timeframes for repairs and maintenance. If the project is under FERC's jurisdiction, unique project conditions may indicate that modifications to the FERC Plan may be necessary to achieve compliance and avoid the need for variance requests during construction.

Monitoring Plan: If final cleanup and restoration activities have not occurred prior to the spring melt, monitoring of the right-of-way should be implemented during the delay between construction and restoration or temporary shutdown of construction activities. The monitoring program should identify: (1) erosion control structures requiring repair; (2) areas of slope instability; and (3) areas where significant levels of erosion are occurring. The EI should determine the most effective means of dealing with identified problems, taking into consideration the suitability of the right-of-way for access by equipment, potential damage that could



Right-of-Way Prepared for Final Stabilization

occur by equipment accessing the right-of-way, and the urgency/significance of the problem. Road restrictions and soft soils could limit access to the erosion controls requiring repair. Flyover inspections of areas that are inaccessible by wheeled vehicles or that are within or adjacent to a sensitive resource could be the most efficient method of conducting the inspection.

8.0 FINAL STABILIZATION AND POST-CONSTRUCTION MONITORING



Right-of-Way Stabilized for Winter

Whether restoration is completed under frozen conditions or delayed until the spring or summer period, the right-of-way will require stabilization prior to the spring thaw. Seed intended for site stabilization or restoration will not germinate under frozen conditions, and therefore Companies should plan for alternative methods of site stabilization prior to the first spring rains (see Section 7.0, Temporary Erosion and Sediment

Control). Some agencies do not recommend dormant seeding or mulching over snow based on limited effectiveness during snow melt and runoff and early spring rains.

FINAL STABILIZATION ELEMENTS TO CONSIDER IN DEVELOPING A FROZEN CONDITIONS PLAN

Timing of Restoration: Determine whether the project will be completely restored or if restoration will be delayed until after the spring thaw. Backfill all areas of open excavation or provide safety fencing and signage for protection. If restoration will be delayed, consider leaving the subsoil in a roughened condition to slow the sheet flow of water. After restoration, restore contours for drainage to preconstruction conditions. Delaying seeding can also result in the development of noxious weeds that require treatment, such as the application of herbicides, prior to additional seeding and other restoration activities.



Stabilization of the Right-of-Way

When restoration activities must be delayed, it is possible that these activities may need to occur within recommended avoidance timeframes. Consider that exceptions to the avoidance timeframes may be necessary and regulatory agencies may impose limits on the number of personnel and equipment redeployed during these periods.

Regulatory agency approval of work during avoidance timeframes may be necessary when restoration is delayed.

Stabilization Methods: Each plan should address mulching or the use of soil tackifiers in disturbed areas that are unable to have restoration completed. The plan should incorporate information obtained from consultations with local erosion control professionals to determine the best method for anchoring the mulch (e.g., crimping, tackifiers, etc.) under frozen conditions. Temporary seeding, as a restoration tool, should be reviewed with the regulatory agencies.

Erosion Control Devices: The construction and maintenance of erosion control devices will be a continual activity for a project. During restoration, which can be protracted due to the frozen conditions, the plan should determine a schedule and process for verify that all erosion controls are functional and how to repair the devices if necessary.

Landowners: The plan should emphasize the importance of communicating with landowners throughout frozen conditions about construction activities, construction shut downs, restoration of the right-of-way and cleanup activities timing. It is important to address their expectations for the overall timeframe for construction and restoration activities and for access across the right-of-way at all phases of construction considering that winter construction often extends the overall period of disturbance.



Drill Seeder in Upland Area

Seed Rate: To ensure adequate vegetation growth when seeding outside of the recommended seeding windows, consider seeding at a higher rate to account for lower germination success. This should be discussed with regulatory agencies, as appropriate. Additional information may be gathered from local seed supplying companies.

9.0 CONCLUSION

Frozen conditions construction offers certain opportunities and challenges. Understanding the potential issues, planning for them, and coordinating with landowners, construction contractors, agencies, and others can minimize problems during construction and restoration of the right-of-way. The guidelines presented herein focused on construction and environmental protection practices unique to frozen conditions. The intent by the INGAA Foundation in conducting this research is to assist its members with preparing for construction in frozen conditions. These guideline will assist Companies to develop project-specific plans based on each project's unique location, timing, and other variables.

Attachment A is included to provide a convenient checklist of identified items to consider in preparing the frozen conditions plan.

Attachment A

Frozen Construction Planning Guidelines Checklist

This checklist has been compiled to aid contractors and Companies on recommended measures that should be considered and adapted as appropriate when constructing under frozen conditions.

TABLE A-1		
Planning Guidelines Checklist		
	Plan Elements	Considered and addressed in plan? (Y or N or N/A)
Preconstruction Planning		
1.	Defining Frozen Conditions: Consult with the project's primary regulatory agencies on how 'frozen conditions' will be defined in each agency's permits.	
2.	Project Schedule and Timing: Incorporate project flexibility into the plan to avoid unanticipated frozen conditions during construction. Define the conditions of timing under which the plan would be implemented (i.e., specific calendar dates or certain conditions).	
3.	Communication: Develop a decision making chain for determining if work on the construction right-of-way should occur in frozen weather conditions due to changing conditions.	
Snow Removal and Storage		
1.	Advance Planning with the Landowner: Prior to construction, obtain landowner approval for extra areas off of the approved right-of-way including along access roads to allow snow storage and install temporary gates at livestock fencing crossings in accordance with landowner requirements to allow for vehicle access for snow removal activities.	
2.	Snow Removal Equipment: Use either a motor-grader, snowplow, bulldozer, or industrial blower to blade or push the snow off the access roads and right-of-way. Specify in the plan whether equipment modifications such as a 'shoe' will be used to prevent topsoil or vegetation removal.	
3.	Signage: Place proper signage for designated avoidance areas (i.e., cultural sites or special species habitat areas) in advance of frozen conditions to prevent disturbance during snow removal activities.	
4.	Snow Storage: Clearly separate snow storage from spoil storage within the right-of-way to prevent mixing. Consider the placement of stockpiled snow (i.e., drainage patterns) to ensure that snow melt will not cause erosion and/or sediment loss.	
Crossing Wetlands and Waterbodies		
1.	Frost/Ice Roads: The use of frost/ice roads provide additional equipment support during construction across wetlands and waterbodies and make environmentally sensitive areas (i.e., breeding/roosting areas for migratory birds) less susceptible to damage.	
2.	Equipment Bridges: During planning, it should be determined if equipment bridges will be removed if construction is not active in frozen conditions or if bridges are installed to not impede flow water flow during the spring thaw.	
3.	Soils: Type of soils crossed by the project should be considered. Careful preconstruction planning, which could include soil borings, will provide information to evaluate site-specific soil conditions expected during construction. Appropriate alternative techniques could be identified for use at the time of construction to limit the potential for soil mixing.	
4.	Topsoil Segregation: If snow is stockpiled over the trenchline prior to trench excavation, remove the snow to prevent the mixing of snow with the topsoil material. If a deep frost layer has formed over the trenchline, a special rock saw can be used to remove the frozen block of material which is then segregated from all other excavated materials to be used during backfilling. A rotary wheel trencher equipped with rock buckets can also be used to segregate the top 1 foot of soil into a pile, followed by a second pass to excavate the subsoil.	

TABLE A-1		
Planning Guidelines Checklist		
Plan Elements		Considered and addressed in plan? (Y or N or N/A)
5.	Open Trench or Ditch: Minimize the amount of open trench during frozen conditions to reduce the risk of freezing excavated spoil materials. One option is to limit the pace of excavation activities to the length of the ditch than can be excavated, the pipe lowered in, and fully backfilled within a specified period of time (ranging from 24 to 72 hours). Another technique used is to strip off the outer layers of a frozen soil pile and use the unfrozen inner subsoil first during backfilling.	
6.	Crowning to Mitigate Trench Subsidence: Where trench subsidence is anticipated, a crown should be constructed with native material directly over the backfilled trench and should not extend out beyond the trenchline. Monitor the trench for subsidence or excessive crowning as weather conditions improve.	
Frost Roads through Wetlands		
1.	Plan Road Development: Review wetland resources along the route and, in consultation with the jurisdictional permitting agency, plan for the need for frost roads.	
2.	Right-of-Way Clearing: Depending on project-specific conditions, wetlands with saturated soils and/or standing water require less clearing activities, whereas wetland types such as bogs, cedar swamps, and scrub-shrub wetlands may require woody vegetation clearing. Temporary equipment mats or other means may be necessary to prevent rutting during the removal of trees and woody vegetation.	
3.	Construct Temporary Frost Road: Development of the frost road should begin as soon as freezing conditions are sustained and there is sufficient enough frost or snow to support lightweight or low ground pressure equipment to begin packing the snow along the designated haul road path.	
Upland Areas		
1.	Construction Schedule: The average duration and intensity of frozen conditions in the project region should be considered early in project planning and scheduling. Long-term topsoil stockpiling to manage the topsoil and accomplish more effective seeding and restoration may be necessary after the spring thaw.	
2.	Topsoil Removal: Topsoil segregation should be completed prior to frozen soil conditions where practicable. When topsoil is frozen at the time of topsoil stripping, multiple passes (vs. a single pass) with a bulldozer or other specialized equipment (e.g., soil rippers) may be necessary to remove only the topsoil and not the subsoil.	
3.	Timing of Topsoil Restoration: Restoration should occur after both the stockpiled topsoil and exposed subsoil have thawed, the ground has dried following the spring melt, and the soils are more easily worked. During thaw periods, any travel or use of equipment over topsoil may need to be suspended to avoid soil mixing.	
Water Handling		
1.	Equipment Care: Frozen conditions can cause breakdowns in equipment. Protecting equipment from the elements especially when dewatering during freezing conditions, will ensure operations. Pumps may have to be installed in small heated shelters to prevent the pumps from freezing and or causing damage to the pumps that could result in a spill or leak of lubricants or fuel.	
2.	Discharge Rate and Volume: Dewatering activities performed during frozen conditions should be continuously monitored and adjusted as necessary. Discharge locations should be carefully evaluated and selected based on site conditions including vegetation cover, soil type, and topography.	
3.	Structure Installation and Removal: Dewatering structures (e.g., filter bags and straw bale structures) may be installed early in the construction process prior to frozen ground conditions. Dewatering structures are easiest to remove when done soon after final use. Although water-logged, the structures may not be frozen and crews can remove. Locations of the filter bags placed off the right-of-way should be marked with lathe or similar methods to assist crews in relocating the filter bag for proper disposal.	
4.	Water Appropriation: Proper planning and communication with regulatory agencies with jurisdiction over water appropriation is important to successfully complete hydrostatic testing procedures. Where testing would occur during low-flow periods, companies should discuss any appropriation volume or rate restrictions with the appropriate regulatory agencies.	

TABLE A-1		
Planning Guidelines Checklist		
Plan Elements		Considered and addressed in plan? (Y or N or N/A)
Temporary Erosion and Sediment Control		
1.	Installation of Temporary Erosion and Sediment Controls: Companies should review the construction right-of-way and consider installing temporary erosion and sediment controls prior to frozen ground conditions. Advance planning and placement will enable the devices to be more effective throughout construction.	
2.	Winter and Spring Thaw Inspection: Companies should consider keeping an EI and environmental labor crew on site or on call through the periods of thaw to monitor erosion control structures and stabilization measures and make adjustments or repairs as necessary and as right-of-way conditions allow. The frozen conditions plan should address adequate crews to be available to conduct repairs or maintenance during thaw periods	
3.	Monitoring Plan: If final cleanup and restoration activities have not occurred prior to the spring thaw, then a monitoring plan should be in place and implemented during the delay between construction and restoration or temporary shutdown of construction activities. The monitoring program should identify: erosion control structures requiring repair, areas of slope instability, and areas where significant levels of erosion are occurring.	
Final Stabilization and Post-Construction Monitoring		
1.	Timing of Restoration: Determine whether the project will be completely restored or if restoration will be delayed until after the spring thaw. Backfill all areas of open excavation or provide safety fencing for protection.	
2.	Stabilization Methods: The Frozen Conditions Plan should address mulching or the use of soil tackifiers in disturbed areas that are unable to have restoration completed.	
3.	Erosion Control Devices: The frozen conditions plan should determine a schedule and process for verifying that all erosion controls are functional and how to repair the devices, if necessary.	
4.	Landowners: Communicate with the landowners on schedule of restoration, how to report any areas of concern, and the process for post-construction monitoring during any weather shut-down periods.	
5.	Seed Rate: When seeding outside of the recommended seeding windows, consider seeding at a higher rate to account for lower germination success.	