

Casey A. Furey
100 West Broadway, Suite 250
P.O. Box 2798
Bismarck, ND 58502-2798
701.223.6585
cfurey@crowleyfleck.com

February 7, 2023

Via Electronic Mail

Mr. Steve Kahl
Executive Director
North Dakota Public Service Commission
600 E. Boulevard, Dept. 408
Bismarck, ND 58505-0480
ndpsc@nd.gov

**In re: ONEOK Bakken Pipeline, L.L.C.
Spring Creek II Pump Station
Case No. PU-22-164
Our File No. 072591-000010**

Dear Mr. Kahl:

Enclosed for filing in the above-referenced matter, please find ONEOK Bakken Pipeline, L.L.C.'s Certification Relating to Modification.

Please feel free to contact me if you have any questions. Thank you.

Sincerely,

/s/ Casey A. Furey

Casey A. Furey

CAF/lh
Enc.

cc: Wade C. Mann (via email)
Michael Dailey (via email)
Victor Schock (via email)

40 PU-22-164 Filed 02/07/2023 Pages: 4
Certification and documentation relating to § 49-22.1-01(3)(a)
ONEOK Bakken Pipeline, L.L.C.
Casey Furey, Crowley Fleck, PLLP

STATE OF NORTH DAKOTA
PUBLIC SERVICE COMMISSION

ONEOK Bakken Pipeline, L.L.C.
Pump Station Addition - McKenzie County
Siting Application

Case No. PU-22-164

CERTIFICATION RELATING TO MODIFICATION

STATE OF OKLAHOMA)
) ss. DECLARATION OF
COUNTY OF TULSA) TODD MCKIMMEY


The undersigned, Todd McKimney, hereby states as follows:

1. I am the Vice President for ONEOK Bakken Pipeline, L.L.C. (“ONEOK”) with authority to bind ONEOK to the following, and hereby certify the below information.
2. On May 1, 2019 in Case No. PU-18-399 the North Dakota Public Service Commission (“Commission”) issued Certificate of Corridor Compatibility No. 209 and Route Permit No. 219 to ONEOK approving the construction, operation, and maintenance of an approximately 74.3-mile natural gas liquids (“NGL”) pipeline and associated facilities in McKenzie County, North Dakota known as the Demicks Lake Pipeline.
3. On June 29, 2022 in Case No. PU-22-164, the Commission issued First Amended Certificate of Corridor Compatibility No. 209 and First Amended Route Permit No. 219 to ONEOK for the addition of a pump station to increase throughput of the Demicks Lake Pipeline, known as Spring Creek II Pump Station. The Spring Creek II Pump Station is located on an approximately 8.3-acre parcel in Section 3, Township 148 North, Range 102 West in McKenzie County (“Project Site”).
4. Certification Relating to Order Provision No. 32 states: “Company understands and agrees that it shall inform the Commission in writing of any plans to modify the transmission facility or of any plans to modify the site plan for the transmission facility.”
5. In accordance with Certification Relating to Order Provision No. 32 and N.D.C.C. § 49-22.1-01(3)(a) governing facility improvements, ONEOK hereby provides written notice of its intent to modify the site plan of the Spring Creek II Pump Station within the previously studied, surveyed, and certificated 8.3-acre Project Site. Specifically, ONEOK intends to install a cathodic protection bed on the west side of the facility boundary, just outside of the fence line, but within the certificated site boundary as a measure to help protect against facility corrosion. The location of the cathodic protection bed is within the certificated Project Site boundary depicted on Exhibit 1 attached hereto.

6. Installation of the cathodic protection groundbed will consist of trenching a shallow bed approximately 100 feet long and up to 15 feet deep. Graphite anodes, wiring, fluidized coke breeze, and pea gravel backfill will be installed in the trench. Below-ground wiring will extend from the ground and connect to a breaker box and rectifier mounted on a post secured to the ground. The bed will require no additional above-ground features or structures to be constructed nor the installation of additional piping.
7. Pursuant to N.D.C.C. § 49-22.1-01(3)(a):
 - a. The construction activities will not affect known Exclusion or Avoidance Areas;
 - b. The activities are for an improvement to the Spring Creek II Pump Station site; and
 - c. ONEOK will continue to comply with all applicable conditions and protections in siting laws and rules and Commission orders previously issued for any part of the facility.


I declare, under penalty of perjury under the law of North Dakota, that the foregoing is true and correct.

Signed on the 6th day of February, 2023, at Tulsa County, Oklahoma, United States of America.



Todd McKimmey
VP Integrated Operations & Capital Projects
ONEOK Bakken Pipeline, L.L.C



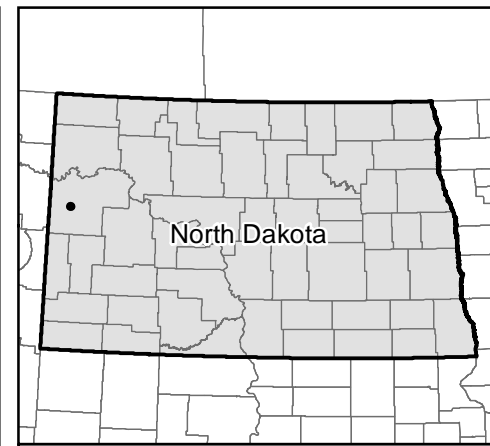

Imagery Source: USDA-FSA-APFO
Aerial Photography Field Office








-  Project Site (PU-22-164)
-  PSC Certificated Corridor
-  Rectifier
-  Underground Wiring
-  Facility Fence
-  Cathodic Protection Groundbed
-  Temporary Workspace

Exhibit 1

ONEOK Bakken Pipeline, L.L.C.
Spring Creek II Pump Station

Aerial Map

McKenzie County, ND



Source: Z:\Clients\W_F\Oneok\Spring_Creek_IL_PSP\Permitting\SC02022_11\Spring_Creek_IL_Detailed_Map_Nov22.mxd
Date: 11/29/2022