

APPENDIX C

Environmental Mitigation Plan and Engineering Drawings





WTT Pipeline Environmental

Mitigation Plan

ND PSC Case No. PU-16-____

May 2016

1.0 INTRODUCTION.....1

2.0 GENERAL MITIGATION MEASURES1

2.1 Contractor.....1

2.2 Line List and Permits.....1

2.3 Environmental Inspector.....1

2.4 Rights-Of-Way.....2

2.5 Dust Control2

2.6 Undesirable Species Control2

2.7 Non-Hazardous Wastes3

2.8 Hazardous Wastes3

2.9 Burning and Fire Prevention.....4

2.10 Wet Weather4

3.0 SPILL PREVENTION.....4

3.1 General.....4

3.2 Storage.....5

3.3 Refueling.....5

3.4 Cleanup and Emergency Notification5

4.0 TEMPORARY EROSION AND SEDIMENT CONTROL.....6

4.1 General.....6

4.2 Sediment Barriers.....6

4.3 Temporary Slope Breakers.....7

4.4 Temporary Mulching.....8

5.0 HIGHWAY AND ROAD CROSSINGS8

6.0 UPLANDS.....8

6.1 Clearing.....8

6.2 Grading.....8

6.3 Topsoil Removal and Storage9

6.4 Tree and Shrub Mitigation9

6.5 Trenching10

6.6 Pipe Preparation and Installation.....11

6.7 Backfilling11

6.8 Cleanup.....12

6.9 Permanent Erosion and Sediment Control12

6.9.1 Permanent Slope Breakers.....12

6.10 Reclamation and Revegetation13

6.10.1 Soil Compaction.....13

6.10.2 Rock Removal13

6.10.3 Seeding and Mulching13

6.10.4 Fences.....15

6.10.5 ROW and Pipeline Markers15

- 7.0 WETLAND CROSSINGS.....15**
 - 7.1 General..... 15
 - 7.2 Easement and Workspace 16
 - 7.3 Wetland Crossing Methods 16
 - 7.3.1 Dry Wetland Crossing Method..... 17
 - 7.3.2 Standard Wetland Crossing Method..... 18
 - 7.4 Restoration and Reclamation 18

- 8.0 WATERBODIES AND RIPARIAN AREAS..... 19**

- 9.0 HYDROSTATIC TESTING..... 19**
 - 9.1 General..... 19
 - 9.2 Test Water Source..... 19
 - 9.3 Water Discharge..... 20

Appendix A: Construction Schematics

1.0 INTRODUCTION

NST Express, LLC, (NST) has prepared this Environmental Mitigation Plan (EMP) for the construction of the WTT Pipeline Project (Project). The Project will consist of an approximately 3.6 mile long, 8-inch diameter carbon steel pipe and associated facilities that will transport crude oil from a third-party's existing crude oil break-out tank at the southern end of the Project to NST's Alexander Facility, which is currently under construction, near the town of Alexander, McKenzie County, North Dakota.

This EMP outlines general construction-related mitigation measures that will be implemented by NST and its construction contractor (Contractor) during construction of the Project. Specific conditions associated with agency permits are not specifically addressed herein.

Guidance documents used in the preparation of this EMP include North Dakota's Guide to Temporary Erosion-Control Measures for Contractors, Designers, and Inspectors (2001) and the U.S. Army Corps of Engineers (USACE) regional conditions for projects operating under Nationwide Permits in North Dakota.

NST anticipates using the horizontal directional drilling (HDD) method for road and some wetland crossings to avoid impact or disturbance. Any impacts to wetlands that occur will be authorized under USACE Nationwide Permit 12. Site specific details for these crossings are not included in this EMP.

2.0 GENERAL MITIGATION MEASURES

2.1 Contractor

NST will make the requirements of this EMP and applicable environmental permits a contractual obligation for the Contractor. The Contractor will ensure that persons engaged in construction of the Project are informed of these construction requirements.

2.2 Line List and Permits

NST will provide the Contractor with a construction list that describes special requirements, as agreed upon with private landowners and as required through agency permitting processes (e.g., road crossing permits).

2.3 Environmental Inspector

NST will provide construction oversight to confirm Contractor compliance with the measures of this EMP and any landowner agreements, as well as applicable federal, state, and local

environmental permits. NST will retain one or more third-party inspectors (Environmental Inspector) who are knowledgeable of the environmental mitigation requirements for this Project. The Environmental Inspector will have the authority to stop construction activities and order corrective mitigation for actions that are not in compliance with this EMP, any landowner agreements, or environmental permit requirements. The Environmental Inspector will maintain appropriate records to document compliance with these and other applicable environmental permit conditions. At the end of each week, the Environmental Inspector will summarize daily reports into a weekly report that will be submitted to NST. In turn, the weekly reports will be summarized in a monthly report submitted to the North Dakota Public Service Commission (ND PSC).

2.4 Rights-Of-Way

Access to the pipeline construction right-of-way (ROW) will be from public roadways and private landowner-approved access roads. The Contractor will mark access routes with signs to clearly identify approved access roads.

All construction equipment and vehicles will be confined to: approved access roads, the permitted pipeline construction ROW, additional temporary workspaces, the Alexander Facility, and the third-party break-out tank sites.

2.5 Dust Control

Dust control related to construction activities will be accomplished through physical and administrative means.

All construction-related vehicles will adhere to posted speed limits on public roadways and as designated in landowner agreements on private lands. Work hours near residential areas may be limited.

The Contractor may use multiple methods to wet the ROW to control airborne dust, including water trucks and sprinklers, or additional measures as appropriate, based on site-specific conditions.

2.6 Undesirable Species Control

NST will require that all construction-related equipment be thoroughly cleaned prior to moving the equipment to the job site to limit the potential for the spread of noxious weeds, insects and soil-borne pests. All equipment will be cleaned with high-pressure washing equipment.

NST will perform a noxious weed survey prior to construction. If a noxious weed species is present within the construction ROW, the

extent of infestation areas will be clearly demarcated in the field with flagging or staking. Construction crews will be informed of these areas and instructed to minimize the construction equipment and the number of passes by this equipment through infested areas.

During construction, the Contractor will clean the surface area of all vehicles, and construction machinery, including the undercarriage, to remove excess soil and vegetative debris, if that equipment is known to have passed through a weed or soil-borne pest infested area.

Only certified weed free vegetative components (e.g., mulch, straw/hay bales, seed mixes) will be used on the Project.

2.7 Non-Hazardous Wastes

The Contractor will handle and dispose of human wastes by use of portable, self-contained toilets. Wastes from these units will be collected by a licensed contractor for disposal only at licensed and approved facilities.

The Contractor will remove all trash from the construction ROW on a daily basis unless otherwise approved or directed by NST.

The Contractor will dispose of HDD cuttings and drilling mud. Disposal options may include spreading over the construction ROW in an upland location approved by the landowner or hauling to an approved licensed landfill. All waste will be properly disposed of per regulatory agency requirements.

2.8 Hazardous Wastes

The Contractor will ensure that all hazardous and potentially hazardous materials are transported, stored, and handled in accordance with all applicable regulations. Workers exposed to or required to handle hazardous materials will have received proper training in use of those materials, in accordance with the applicable regulations and the manufacturer's recommendations.

The Contractor will dispose of all hazardous materials at licensed waste disposal facilities.

If toxic or hazardous waste materials or containers are encountered during construction, the Contractor will stop work immediately and notify NST. The Contractor will not restart work until clearance is granted by NST.

2.9 Burning and Fire Prevention

The Contractor will comply with all federal, state, county, and local fire regulations regarding prevention of uncontrolled fires.

The Contractor will maintain a contact list and information of jurisdictional fire authorities. Fire control equipment, including water and chemical fire extinguishers, will be available at construction sites and construction personnel will be properly trained in the use of such equipment.

Flammable materials kept on a construction site will be stored in approved containers away from ignition sources. All flammable wastes will be removed from construction sites on a regular basis.

Smoking will be prohibited at construction sites, except in designated areas away from flammable materials.

2.10 Wet Weather

The Contractor will restrict certain construction activities and work during excessively wet soil conditions to minimize rutting and soil compaction. Activities may be suspended based on the following conditions:

- type of equipment and nature of construction activity planned for that day;
- potential that rutting may cause mixing of topsoil with subsoil layers;
- extent of surface ponding; and,
- the potential for excessive soil compaction.

Construction work will be suspended if these conditions exist unless adequate protection measures are taken to avoid irreparable damage to roads or land, such as through equipment rerouting or the use of construction mats.

3.0 SPILL PREVENTION

3.1 General

The Contractor will ensure that all equipment is free of leaks prior to use on the construction ROW and access roads. Throughout the period of construction, the Contractor will conduct regular maintenance and inspections of the equipment to reduce the potential for spills or leaks.

All equipment parked overnight will be at least 100 feet from a watercourse or wetland, unless otherwise approved by the Environmental Inspector

Stationary equipment will be placed within a secondary containment if it will be operated or require refueling within 100 feet of a wetland or waterbody boundary.

3.2 Storage

Fuels and lubricants will be stored only at designated staging areas. Storage of fuel and lubricants will be at least 100 feet away from the edge of any perennial watercourse, wetland, storm drain, or any high consequence area.

No bulk fuel or storage tanks will be placed in the construction ROW. Bulk fuel storage at temporary work or construction staging areas will be located in a lined, earthen-berm secondary containment structure.

3.3 Refueling

Refueling and lubrication of equipment will be restricted to upland areas at least 100 feet away from any perennial watercourse, wetland, storm drain, or any high consequence area, except where equipment is required to be within 100 feet of a waterbody (e.g., trench dewatering pump).

Rubber-tired vehicles (e.g., pickup trucks) normally will refuel at the construction staging areas or commercial gas stations. Tracked machinery (e.g., backhoes, bulldozers) will be refueled and lubricated on the construction ROW. Equipment maintenance will be conducted in staging areas when practical. When necessary and with Environmental Inspector approval, equipment repairs may be made on the construction ROW.

Each fuel truck that transports and dispenses fuel to construction equipment or Project vehicles along the construction ROW or within equipment staging areas will carry oil spill response equipment and materials onboard at all times. Truck drivers and construction crew personnel will be trained on proper use of this equipment and materials.

3.4 Cleanup and Emergency Notification

Construction activities will be conducted to allow for prompt and effective cleanup of spills of fuel and other hazardous materials. Each construction crew will have sufficient tools and material to stop leaks and supplies of absorbent and barrier materials to allow rapid

containment and recovery of spilled materials. Crew members must know and follow the procedure for reporting spills.

Emergency notification procedures between the Contractor and NST will be established in the planning stages of construction. In the event of a spill meeting agency reporting criteria, the Contractor will immediately notify NST who will then promptly notify the appropriate regulatory agency.

4.0 TEMPORARY EROSION AND SEDIMENT CONTROL

4.1 General

As detailed in the Stormwater Pollution Prevention Plan (SWPPP) for this Project, temporary erosion and sediment control measures will be installed prior to initial disturbance of the soil, maintained throughout construction, and reinstalled as necessary until replaced by permanent erosion control structures or restoration of the construction ROW is complete.

The Contractor will inspect all temporary erosion control measures within 24 hours of each significant rainfall event of 0.25 inches or greater. The Contractor will repair or replace all ineffective temporary erosion control measures as expediently as practicable, but prior to the next anticipated rainfall event or within 24 hours of discovery (whichever comes first) or as soon as field conditions allow.

4.2 Sediment Barriers

Sediment barriers will be constructed of silt fence, staked hay or straw bales, fiber rolls, compacted earth (e.g., drivable berms across travel lanes), sand bags, or other appropriate materials.

Sediment barriers will be installed below disturbed areas where there is hazard of offsite sedimentation. Areas where temporary sediment barriers will be placed include: the base of sloped approaches to roadways, flowing streams, and wetlands; along the edge of the construction ROW, as needed to prevent downslope siltation of adjacent waterbodies and wetlands; and as required along trench or test water discharge locations.

Sections of temporary sediment barriers may be designed to allow passage of construction equipment. Sediment barriers will be reinstalled to their original specifications when equipment passage is no longer required, heavy precipitation is imminent, or at the end of the work day, whichever is sooner.

The Contractor will maintain hay or straw bale/wattle and silt fence sediment barriers by removing collected sediment when it reaches one-half the height of the barrier and replacing the damaged control. If bale filters cannot be replaced due to access problems, the Contractor will place a new row of sediment barriers upslope.

The Contractor will use hay or straw bales that are free of noxious weeds.

The Contractor will remove sediment barriers, except those needed for permanent erosion and sediment control, during cleanup of the construction ROW.

4.3 Temporary Slope Breakers

Temporary slope breakers will be installed to minimize concentrated or sheet flow runoff in disturbed areas at the following recommended spacing:

Slope (%)	Spacing (feet)
1	300
2	200
3-5	150
>5	100

Temporary slope breakers will be constructed of earthen material, silt fence, staked hay or straw bales, fiber rolls, sand bags, or similar materials.

When earthen berms are constructed, they will be constructed of subsoil material, when practical, and have a two to eight percent slope with a 4-foot base and 1.5-foot height, or as site conditions require.

Temporary slope breakers will direct outfall to a stable, well-vegetated area or an appropriate energy-dissipating device (e.g., silt fence, hay or straw bales/wattles) at the end of the slope breaker and off the construction ROW. The outfall of each temporary slope breaker will be installed to prevent sediment discharge into wetlands, waterbodies, or other sensitive resources.

A hard plug will be left in place where a slope breaker crosses an open trench.

Temporary slope breakers will not be installed on cultivated land except by landowner request.

4.4 Temporary Mulching

If a disturbed construction work area is inactive for one month or is expected to be inactive for one month or more, the Contractor will apply temporary seed and/or mulch to reduce risk of erosion. The Contractor will not apply temporary mulch in cultivated areas unless specifically requested by the landowner. The Contractor will not apply mulch within wetland boundaries.

Temporary mulch of straw or equivalent applied on slopes will be spread uniformly to cover at least 75 percent of the ground surface at an approximate rate of 2 tons per acre of straw or its equivalent. Mulch application on slopes within 100 feet of waterbodies and wetlands will be increased to an approximate rate of 3 tons per acre.

5.0 HIGHWAY AND ROAD CROSSINGS

Construction across paved roads and highways will be in accordance with the requirements of the road crossing permits and approvals obtained by NST. All graded roads will be crossed via HDD unless the responsible governing agency permits NST to use the open cut crossing method.

Unpaved secondary and tertiary roads will be crossed using the HDD method or the open-cut method where permitted by local authorities or private owners. The open-cut method will require temporary closure of the road to traffic and establishment of detours. The Contractor will take measures, such as posting signs along detour routes, to ensure safety and minimize traffic disruptions.

6.0 UPLANDS

6.1 Clearing

The initial stage of construction will involve clearing the construction ROW to allow for a safe operating environment. Clearing of trees, brush, and other vegetation from the ROW may be accomplished with hand-held chainsaws, brush hogs, and hydraulic tree-cutting equipment. Woody material will be chipped or mulched onsite or hauled off to an appropriate disposal location, or as otherwise directed by the landowner. No burning will be conducted as part of this Project.

6.2 Grading

After clearing, the construction ROW will be graded to develop a ROW that allows for a safe working surface for equipment and meets the bending limitations of the pipe. All work will be conducted in accordance with applicable permits, regulations, or guidelines. All grading will be

undertaken with the understanding that original contours and drainage patterns will be re-established to the extent practicable.

6.3 Topsoil Removal and Storage

Measures will be taken to preserve the physical and chemical property integrity of topsoil so it may be used during final reclamation of the construction ROW. Generally, these measures will segregate the topsoil from underlying subsoil layers to prevent mixing during construction and to allow for easy retrieval during reclamation. Topsoil will not be used for construction of earthen berms, trench breakers, to fill low areas, or to backfill the trench.

Topsoil, up to 12 inches or to the depth of cultivation, whichever is greater, will be stripped. Stripped topsoil will be stockpiled in a windrow along the edge of the ROW. After backfilling is completed, excess subsoil must be placed over the excavation area, blending the grade to the existing topography. Topsoil is replaced to the area of excavation after the subsoil is replaced.

6.4 Tree and Shrub Mitigation

NST will address mitigation, reclamation and remediation measures with individual landowners and comply with any applicable state requirements, including the ND PSC's Tree and Shrub Mitigation Specifications.

NST will inventory all trees and shrubs anticipated to be cleared, including those that are considered invasive species or noxious weeds (e.g., *Caragana arborescens*, *Elaeagnus angustifolia*, *Rhamnus cathartica*, *Tamarix chinensis*, *T. parviflora*, *T. ramosissima*, *Ulmus pumila*) before cutting. The inventory will record the location, number, and species of trees and shrubs.

Two 2-year-old saplings will be planted for every one tree removed. Two shrubs (stem cuttings) will be planted for every one shrub removed.

Except in the case of invasive or noxious species, trees and shrubs will be replaced by the same species or similar species, suitable for North Dakota growing conditions. Invasive or noxious species will be replaced by similar non-invasive or non-noxious species suitable for North Dakota growing conditions.

Tree and shrub replacement will not be conducted within the pipeline ROW to facilitate visual inspections of the ROW in accordance with U.S. Department of Transportation safety regulations.

Landowners will be given the option of having replacement trees and shrubs planted on the landowner's property. The landowner will also be given the opportunity to waive those options, in writing, to have replacement trees and shrubs planted off the landowner's property.

6.5 Trenching

Trenching in uplands is typically accomplished with a backhoe excavator or a rotary wheel ditching machine to provide a ditch of sufficient depth and width, with a bottom to continuously support the pipeline. The trench will be excavated to a depth that will enable the pipeline to be installed in accordance with ND PSC requirements (i.e., 48 inches in rangeland, 48 inches in cultivated land, 48 inches at the bottom of the ditch for road crossings, and 72 inches across undeveloped section lines) and in accordance with applicable U.S. Department of Transportation regulations. If an increased pipeline depth is requested by a state-level agency, modifications to additional temporary workspace may be necessary to accommodate the increased amount of trench spoil.

Excavated material will be sidecast within the construction ROW with consideration for topsoil segregation, as noted in Section 6.3. Excavated material will be stored in a manner to minimize erosion and sedimentation.

Gaps will be left in the ROW lateral spoil piles that coincide with breaks in the strung pipe to facilitate natural drainage patterns and to allow the passage of livestock or wildlife.

Trenching operations will be followed as closely as practicable by lower-in and backfill operations to minimize the length of time the ditch is open.

When pumping captured stormwater from the trench, the Contractor will ensure that adequate pumping capacity and sufficient hose is available. The discharge of pumped water will be through filter bags or other methods detailed in the SWPPP and in accordance with the environmental mitigation measures outlined throughout this EMP. If shallow groundwater is encountered during trenching that requires more extensive dewatering, a separate dewatering discharge permit will be obtained.

If drain tile is encountered during construction, the Contractor will repair and/or replace the drain tile. Additionally, if any culverts are disturbed during construction the Contractor will repair and/or replace the culverts.

6.6 Pipe Preparation and Installation

Prior to lowering into the trench, pipe section ends are beveled to prepare them for welding. This process produces shavings which will be removed, to the extent practicable, immediately following beveling. Sections are then welded together to form a continuous pipe.

The pipe may be wrapped with a protective shielding (e.g., epoxy powder, urethane epoxy) to protect the pipe coating during backfilling. This process is typically completed prior to pipeline delivery to the ROW, except for a 3- to 6-inch section at each end to prevent the coating from interfering with the welding process. This bare section of pipe will be coated with an epoxy powder or liquid protectant. A tarp will be placed under the pipe to collect any overspray of epoxy powder or liquid droppings from the infield shielding application. This residual material is considered hazardous and will be disposed of in accordance with measures outlined in Section 2.8.

Prior to lowering into the trench, the coated and welded pipeline will be inspected to ensure it is free of defects.

6.7 Backfilling

The subsoil excavated during the trenching process is initially used to backfill the trench. Prior to backfilling, the trench will be dewatered and trench breakers (soft plugs) installed on slopes where necessary to minimize the potential for water movement and erosion of the trench after the trench is backfilled. Trench breakers will be constructed of materials such as sand bags, sand/cement bags, bentonite bags, or other suitable materials. Topsoil will not be used to construct trench breakers.

Stormwater accumulated in the trench will be removed and discharged, in accordance with the SWPPP and the environmental mitigation measures outlined throughout this EMP.

Backfill will be comprised of soil material with a maximum particle size of less than 1.5 inches to reduce the risk of damage to the pipeline or pipeline coating.

The lesser of 4 feet or the actual depth of topsoil cover, will not be backfilled with soil containing rocks of any greater concentration or size than existed prior to pipeline construction in the pipeline trench, bore pits, or other excavations.

To reduce the potential for ditch line subsidence, spoil will be replaced and compacted by backhoe bucket or by the wheels or tracks of equipment traversing down the trench.

6.8 Cleanup

Cleanup activities to restore the ROW and other disturbed areas to the approximate pre-construction conditions will be conducted immediately following backfilling operations, as weather conditions permit.

All non-hazardous and hazardous materials will be disposed of in accordance with measures outlined in Section 2.7 and Section 2.8.

The ROW will be re-contoured with spoil material to approximate pre-construction contours and surface drainage patterns. Loading of slopes with unconsolidated spoil material will be avoided during slope re-contouring. Topsoil will be replaced after re-contouring of the grade with subsoil. The topsoil will be replaced on the subsoil storage area and over the trench so that after settling occurs, the topsoil's approximate original depth and contour (with an allowance for settling) will be achieved. Subsoil will not be placed on top of topsoil.

Temporary sediment barriers will be removed and accumulated sediment will be re-contoured with the rest of the ROW. As needed, permanent erosion controls will be installed.

6.9 Permanent Erosion and Sediment Control

After final grading and contouring of upland areas, sloped areas will be stabilized with permanent erosion control structures.

6.9.1 Permanent Slope Breakers

Permanent slope breakers will be installed to minimize concentrated or sheet flow runoff in disturbed areas. Permanent slope breakers will be constructed of earthen material. Slope breakers will divert surface runoff to adjacent stable vegetated areas or to energy-dissipating devices. In general, permanent slope breakers should be installed immediately downslope of all trench breakers. Permanent slope breakers will be installed as specified on the construction drawings or generally with a minimum spacing as shown on the following table:

Slope (%)	Spacing (feet)
<5	125
5-10	100
10-20	75
20-30	50
>30	25

The gradient (fall) for each slope breaker will be two to eight percent unless otherwise modified as required by site-specific conditions.

6.10 Reclamation and Revegetation

Reclamation and revegetation activities are designed to return disturbed areas to approximately pre-construction use and capability. The following mitigation measures will be utilized, unless otherwise modified to address site specific conditions or circumstances.

6.10.1 Soil Compaction

Compacted cultivated land and any other severely compacted or rutted areas within the construction ROW will be tilled or chiseled to loosen compacted soils. Plowing under of organic matter, including wood chips and manure, or planting of a green crop such as alfalfa, to decrease soil bulk density and improve soil structure or any other measures will be considered, in consultation with the Natural Resource Conservation Service (NRCS), if mechanical relief of compaction is unsuccessful.

6.10.2 Rock Removal

On agricultural land, rocks greater than 4 inches in diameter that are exposed on the surface due to construction activity will be removed from the ROW prior to and after topsoil replacement.

Clearing of rocks may be conducted with a mechanical rock picker or by manual means, provided that preservation of topsoil is assured. Rock removed from the ROW will be hauled off the landowner's premises or disposed of on the landowner's premises at a location that is mutually acceptable to the landowner and to NST.

6.10.3 Seeding and Mulching

The final seed mixture will be based on recommendations from the local NRCS or otherwise specified by the landowner with ND PSC approval.

Certificates of seed analysis are required for all seed mixes to restrict the introduction of noxious weeds.

Seed will be used within 12 months of testing. Seeding will follow cleanup, re-grading, and topsoil replacement as closely as possible. Seed will be applied to all disturbed surfaces, except cultivated fields unless requested by the landowner.

If mulch was applied for temporary erosion control during construction activities, the Contractor will remove and dispose of the excess mulch prior to seedbed preparation to ensure that seedbed preparation equipment and seed drills do not become plugged with mulch. After seeding, the Contractor may evenly re-apply and anchor (straw crimp) the removed temporary mulch on the construction ROW.

Seeding will be completed at a rate appropriate for the region and stability of the reclaimed surface. Seeding rates will be based on pure live seed specifications for the seed mix.

The Contractor will use a drill seeder equipped with a cultipacker designed and equipped to apply grass and grass-legume seed mixtures. Equipment will include mechanisms (e.g., seed box agitator) to allow even distribution of all species in each seed mix, an adjustable metering mechanism to accurately deliver the specified seeding rate, and with a mechanism (e.g., depth bands) to accurately place the seed at the specified depth.

The Contractor will plant seed at depths consistent with the local or regional agricultural practices.

Broadcast or hydro seeding, used in lieu of drilling, will require double the recommended seeding rates. Where seed is broadcast, a cultipacker or other equipment will be used immediately following broadcasting to incorporate the seed to the specified depth and to firm the seedbed.

Areas that are too steep or otherwise cannot be safely harrowed or cultipacked will be hand-raked in order to incorporate the broadcast seed to the specified depth.

Immediately after seeding, the Contractor will apply certified weed free mulch on all areas with high erosion potential and on slopes greater than 5 percent. The Contractor will spread mulch uniformly over the area to cover at least 75 percent of the ground surface at an approximate rate of 2 tons per acre of hay or straw or their equivalent. The Contractor will not apply mulch in cultivated areas unless requested by the landowner.

If a mulch blower is used, the majority of strands of the mulching material will not be shredded to less than 8 inches in length to allow anchoring. The Contractor will anchor mulch immediately after application to minimize loss by wind and water. Depending upon the length of straw mulch, a soil tackifier may be applied to the soil before the mulch is blown on to help anchor the mulch.

When anchoring (straw crimping) by mechanical means, the Contractor will ensure that the straw stalks are a minimum of 12 inches in length and will use a tool specifically designed for mulch anchoring with flat, notched disks to properly crimp the mulch to a depth of 2 to 3 inches.

6.10.4 Fences

Upon completion of all backfilling, cleanup, and restoration, including mulching and seeding of the construction ROW, permanent repairs will be made to all fences by using either the original material or good quality new material similar to existing fences.

Historic fences will be carefully reassembled by hand from the original material. Where the original material has deteriorated to a state that makes it unsalvageable, replacement material similar to the original will be used if possible.

6.10.5 ROW and Pipeline Markers

Upon completion of all cleanup and restoration activities and during the time when the Contractor is making permanent repairs to fences, the Contractor will install pipeline markers on each side of all roads, section line crossings, fence lines, and other areas where the pipeline markers do not conflict with intended land use.

7.0 WETLAND CROSSINGS

7.1 General

NST anticipates using the HDD method or conventional construction methods to cross wetlands. The HDD method will avoid impact or disturbance to wetlands. Where conventional construction methods are used, and as applicable where the HDD method is used, the general mitigation procedures of this section of the EMP will be followed by the Contractor.

The Contractor will comply with requirements of all permits issued for the wetland crossings by federal, state or local agencies. Any unanticipated impacts to wetlands that may occur will be authorized under USACE Nationwide Permit 12.

Wetland boundaries will be clearly marked in the field with signs and/or highly visible flagging during construction.

7.2 Easement and Workspace

The Contractor will maintain wetland boundary markers during construction in all areas and until permanent seeding is complete in non-cultivated areas.

The Contractor will locate extra work areas (such as staging areas and additional spoil storage areas) at least 100 feet away from wetland boundaries, where topographic conditions permit.

The Contractor will limit clearing of vegetation between extra work areas and the edge of the wetland to the construction ROW and limit the size of extra work areas to the minimum needed to construct the wetland crossing.

7.3 Wetland Crossing Methods

The following general mitigation procedures will be followed by the Contractor in all wetland areas, unless otherwise approved or directed by NST, based on site-specific conditions. All work will be conducted in accordance with applicable permits.

- limit the duration of construction-related disturbance within wetlands to the extent practicable;
- use no more than two layers of timber riprap to stabilize the construction ROW;
- cut vegetation off at ground level leaving existing root systems in place and remove it from the wetland for disposal;
- limit pulling of tree stumps and grading activities to directly over the trench line unless safety concerns require the removal of stumps from the working-side of the construction ROW;
- segregate a maximum of 12 inches of topsoil from the area disturbed by trenching in dry wetlands, where practicable;
- restore topsoil to its approximate original stratum, after backfilling is complete;
- dewater the trench in a manner to prevent erosion and heavily silt-laden flowing directly into any wetland or waterbody;
- remove all timber riprap and prefabricated equipment mats upon completion of construction;

- locate hydrostatic test manifolds outside wetlands and riparian areas to the maximum extent practicable;
- prohibit storing hazardous materials, chemicals, fuels, lubricating oils, or perform concrete coating activities in a wetland, or within 100 feet of any wetland boundary;
- perform all equipment maintenance and repairs in an upland location at least 100 feet from waterbodies and wetlands;
- avoid parking equipment overnight within 100 feet of a watercourse or wetland;
- prohibit washing equipment in streams or wetlands;
- install trench breakers and/or seal the trench to maintain the original wetland hydrology, where the pipeline trench may drain a wetland;
- attempt to refuel all construction equipment in an upland area at least 100 feet from a wetland boundary (otherwise follow the procedures outlined in Section 3); and,
- avoid sand blasting in wetlands to the extent practicable. If sandblasting is performed within a wetland, the Contractor shall place a tarp or suitable material in such a way as to collect as much waste shot as possible and dispose of the collected waste. The Contractor shall clean up all visible deposits of wastes and dispose of the waste at an approved disposal facility.

Specific procedures for each type of wetland crossing method are listed below and shall be designated on the construction drawings but may be modified depending on site conditions at the time of construction. All work shall be conducted in accordance with applicable permits.

7.3.1 Dry Wetland Crossing Method

Topsoil shall be segregated. Pipe stringing and fabrication may occur within the wetland adjacent to the trench line or adjacent to the wetland in a designated extra workspace.

The dry wetland crossing procedure shall be used where this type of wetland is identified on the construction drawings. The following are exceptions to standard wetland crossing methods:

- The width of the construction ROW for upland construction is maintained through the wetland.

- Where extra work areas (such as staging areas and additional spoil storage areas) are designated on the construction drawings, they may be placed no closer than 100 feet from the wetland's edge.
- If the wetland is cultivated, the topsoil shall be stripped using the trench and spoil side method at the same depth as the adjacent upland areas.
- Seeding requirements for agricultural lands shall be applied to farmed wetlands.

7.3.2 Standard Wetland Crossing Method

Topsoil stripping is impracticable due to the saturated nature of the soil. Pipe stringing and fabrication may occur within the wetland adjacent to the trench line or adjacent to the wetland in a designated extra workspace. Based upon the length of a standard wetland crossing and presence of sufficient water to float the pipe, the Contractor may elect to install a standard wetland crossing utilizing the “push/pull” method.

The standard wetland crossing procedure shall be used where this type of wetland is identified on the construction drawings.

Procedures unique to standard wetlands include:

- limiting construction ROW width to a maximum of 75 feet unless site conditions warrant a wider width;
- utilizing low-ground-pressure construction equipment or support equipment on timber riprap or timber mats; and,
- installing sediment barriers across the entire ROW where the ROW enters and exits the wetland.

7.4 Restoration and Reclamation

All timber riprap, timber mats, and prefabricated equipment mats and other construction debris shall be removed upon completion of construction. As much as is feasible, the Contractor shall replace topsoil and restore original contours with no crown over the trench. Any excess spoil shall be removed from the wetland. The Contractor shall stabilize wetland edges and adjacent upland areas by establishing permanent erosion control measures and revegetation, as applicable, during final clean up.

In the absence of detailed revegetation plans or until the appropriate seeding season for permanent wetland vegetation in standard wetlands, the Contractor shall apply a temporary cover crop on the construction ROW at a rate adequate for germination and ground cover unless standing water is present. The Contractor shall apply the temporary cover crop during final cleanup. For farmed wetlands, the Contractor shall apply seeding requirements for agricultural lands or as required by the landowner.

The Contractor shall not use fertilizer, lime, or mulch in wetlands unless required in writing by the appropriate land management agency.

8.0 WATERBODIES AND RIPARIAN AREAS

The Project does not cross any identified waterbodies; as such, construction methods and associated mitigation measures for waterbody crossings are not addressed in this document.

9.0 HYDROSTATIC TESTING

9.1 General

The Contractor will provide for the safety of all pipeline construction personnel and the general public during hydrostatic test operations by placing warning signs in populated areas.

Staging and work areas for filling the pipeline with water will be located a minimum of 100 feet from a waterbody or wetland boundary if topographic conditions permit.

The Contractor will locate hydrostatic test manifolds 100 feet outside wetlands and riparian areas to the extent practicable.

9.2 Test Water Source

NST will provide the Contractor with a copy of the appropriate withdrawal/discharge permits for hydrostatic test water. The Contractor will keep water withdrawal/discharge permits on site at all times during testing operations.

In some instances sufficient quantities of water may not be available from the permitted water sources at the time of testing. Withdrawal rates may be limited as stated by the permit. If the quantity of water from the permitted source is insufficient to allow for hydrostatic testing of the pipeline, an alternative source will be identified and permit authorization sought by NST.

The Contractor will be responsible for obtaining any required water analyses from each source to be used in sufficient time to have a lab analysis performed prior to any filling operations. The analysis will determine the pH value and total suspended solids and other parameters that may be required by the North Dakota Department of Health.

No chemicals will be used in the test water.

9.3 Water Discharge

The Contractor will comply with state-issued National Pollutant Discharge Elimination System permits for discharging test water.

The Contractor will not discharge any water containing oil or other substances that are in sufficient amounts as to create a visible color film (“sheen”) on the surface of the receiving water.


The Contractor will not discharge into state-designated exceptional value waters, waterbodies which provide habitat for federally listed threatened or endangered species, or waterbodies designated as public water supplies, unless appropriate federal, state, and local permitting agencies grant written permission. To avoid impacts from introduced species, no inter-basin transfers (discharge) of hydrostatic test water will occur.

The discharge operation will be monitored and water samples will be collected and analyzed prior to the beginning of the discharge to ensure that it complies with the project and permit requirements. If required by state permits, additional water quality testing will be conducted during discharge, in accordance with permit conditions.

The Contractor will regulate the pig velocity discharge rate (3,000 gpm maximum), use energy dissipation devices, and install sediment barriers, as necessary, to prevent erosion, streambed scour, suspension of sediments, or excessive stream flow. Water must be disposed of using good engineering judgment so that all federal, state, and local environmental standards are met. Dewatering lines will be of sufficient strength and be securely supported and tied down at the discharge end to prevent whipping during this operation.

Selected road crossing pipe sections may be specified to be pre-tested for a minimum of 4 hours. The water for pre-testing of any road and railroad crossings will be hauled by a tanker truck from an approved water source. Since the volume of water utilized in these pre-tests will be relatively small, the water will be discharged overland along the construction ROW and allowed to soak into the ground utilizing erosion and sediment control measures.

Environmental Mitigation Plan: Appendix A

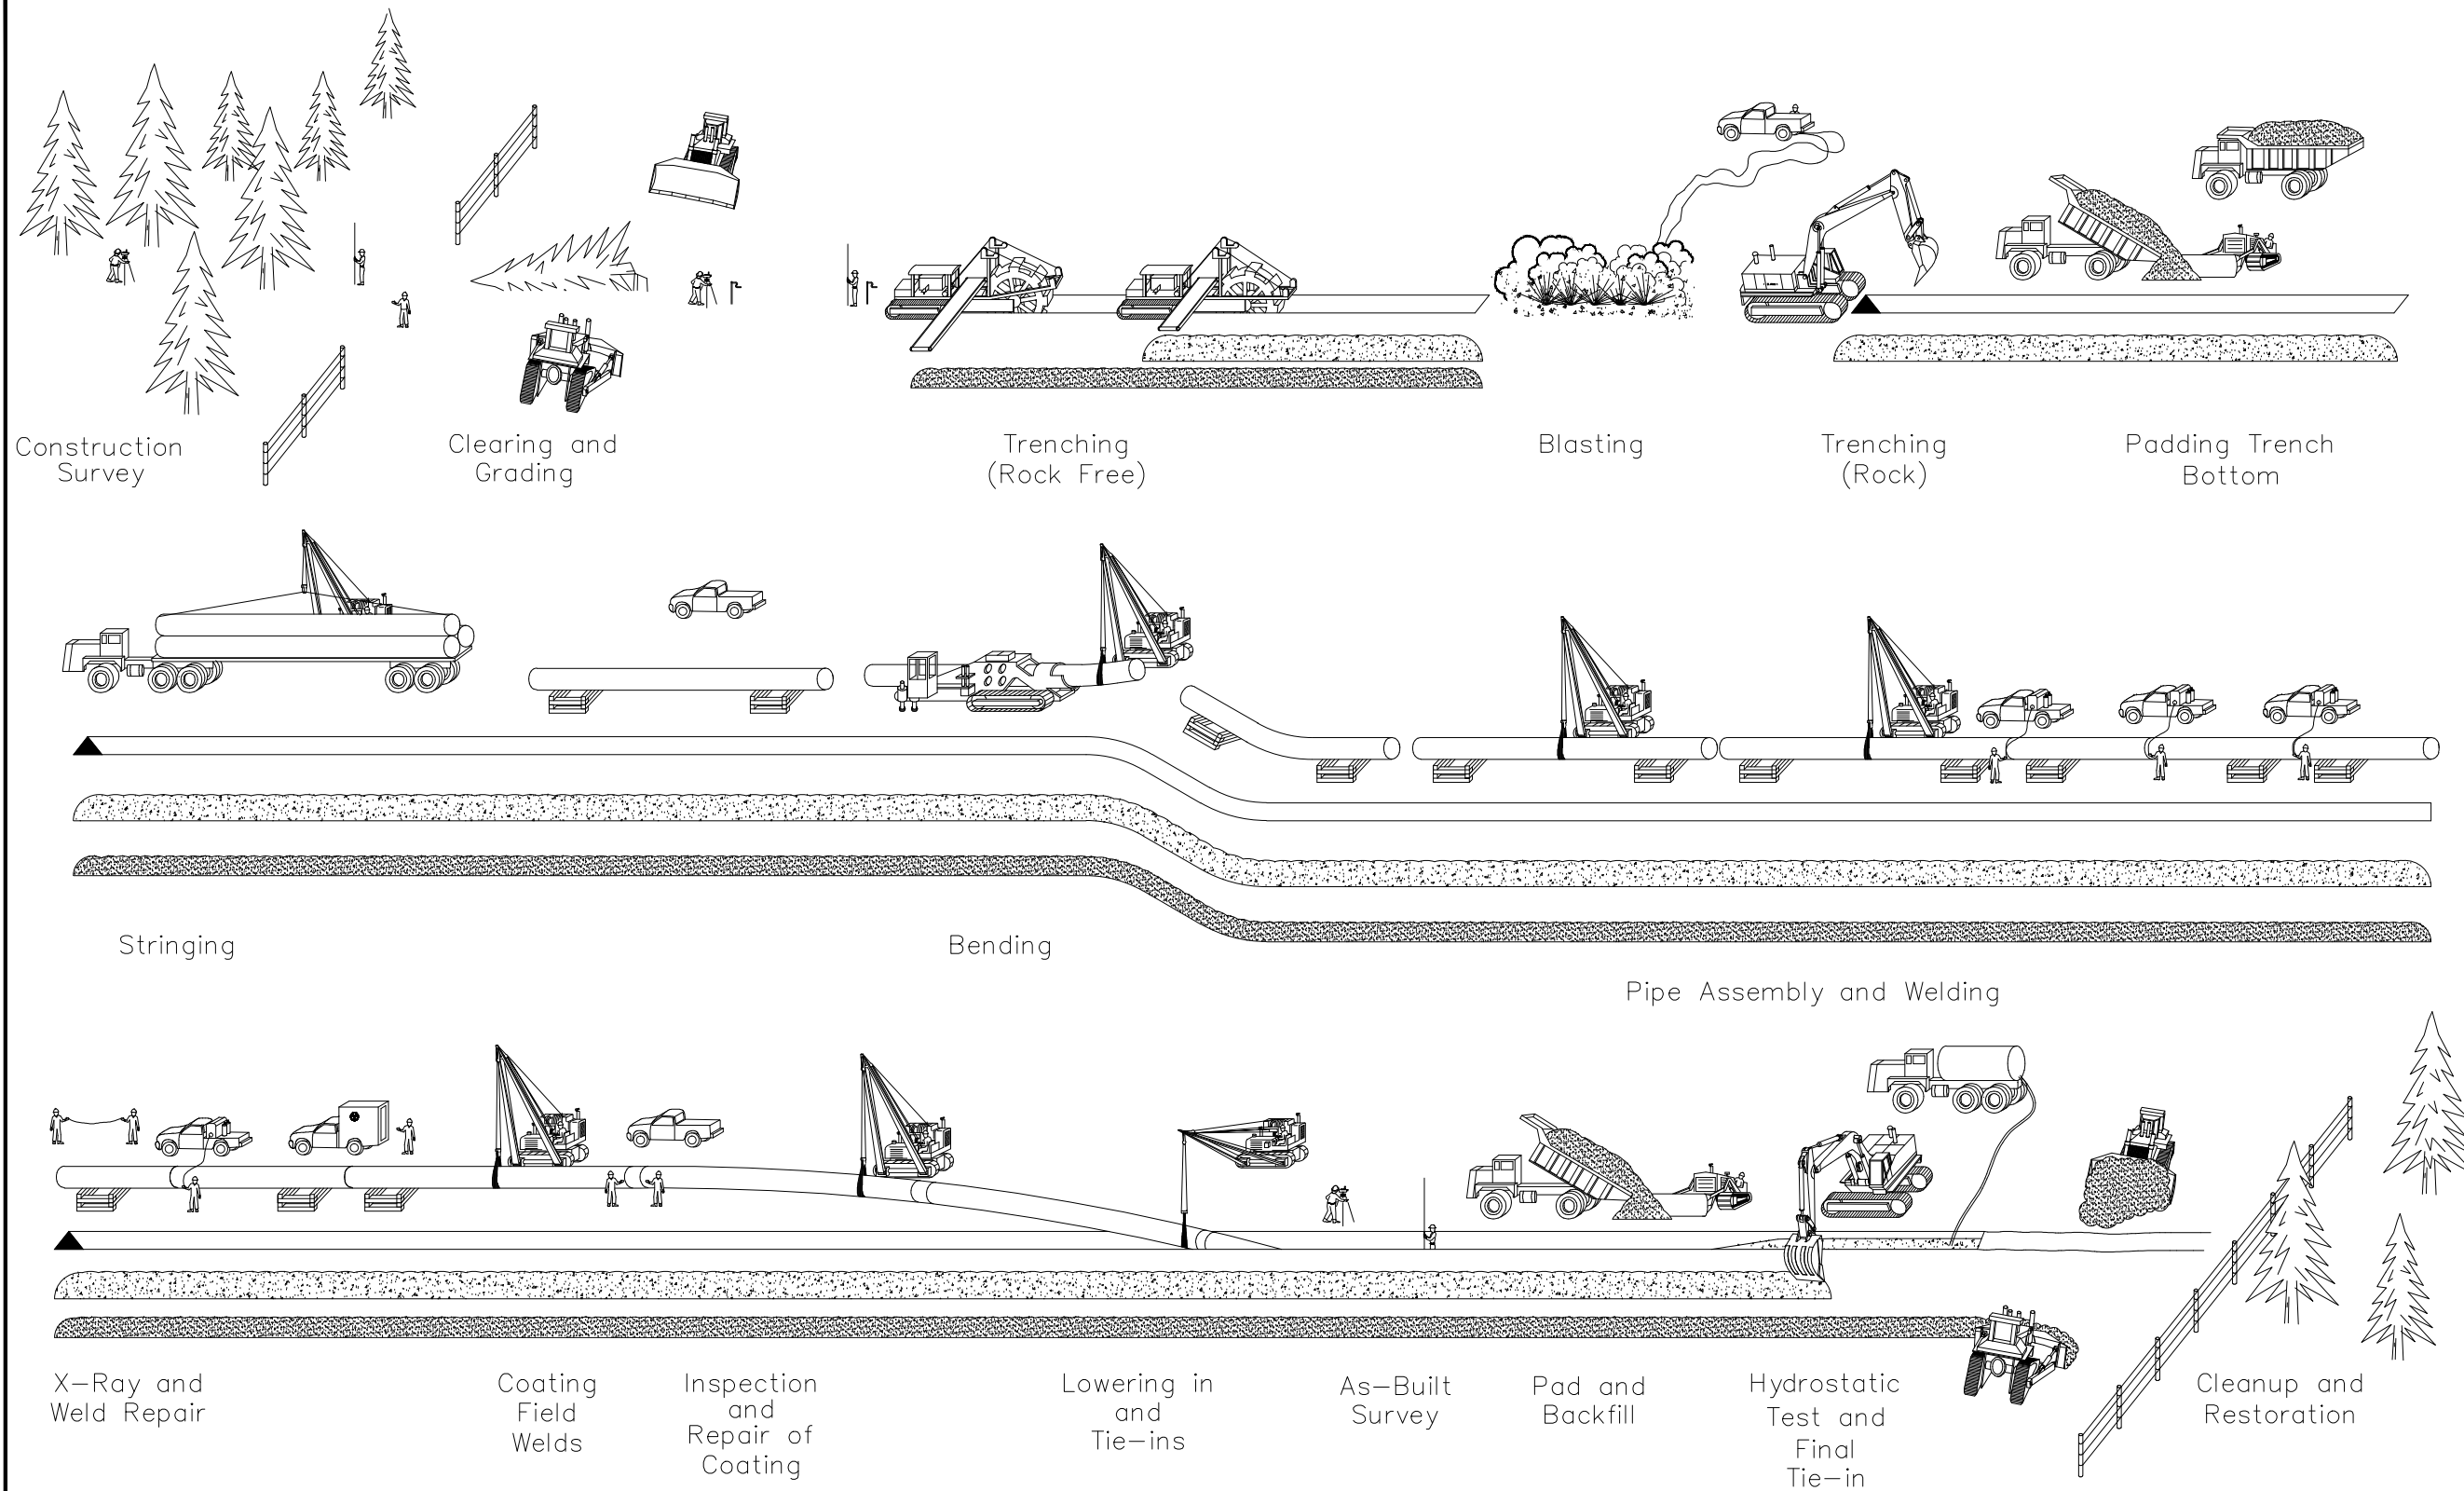

DESIGNED IN ACCORDANCE WITH TITLE 49-PART 192 OF MINIMUM FEDERAL SAFETY STANDARDS AND GPTC GUIDE FOR GAS TRANSMISSION AND DISTRIBUTION PIPING SYSTEMS, LATEST EDITION.

REV LEVEL	DATE	BY	DESCRIPTION	BH	FF	CK	APP.
A	06/03/16	BH	ISSUED FOR PERMIT				
REVISIONS							




WTT PIPELINE

PIPELINE CONSTRUCTION SEQUENCE

MCKENZIE COUNTY NORTH DAKOTA

DATE: 06/03/16 PLOT DATE: - DRAWN BY: BH LOC. NO.: - DRAWING NUMBER: CS SHEET NO.: - REV: A

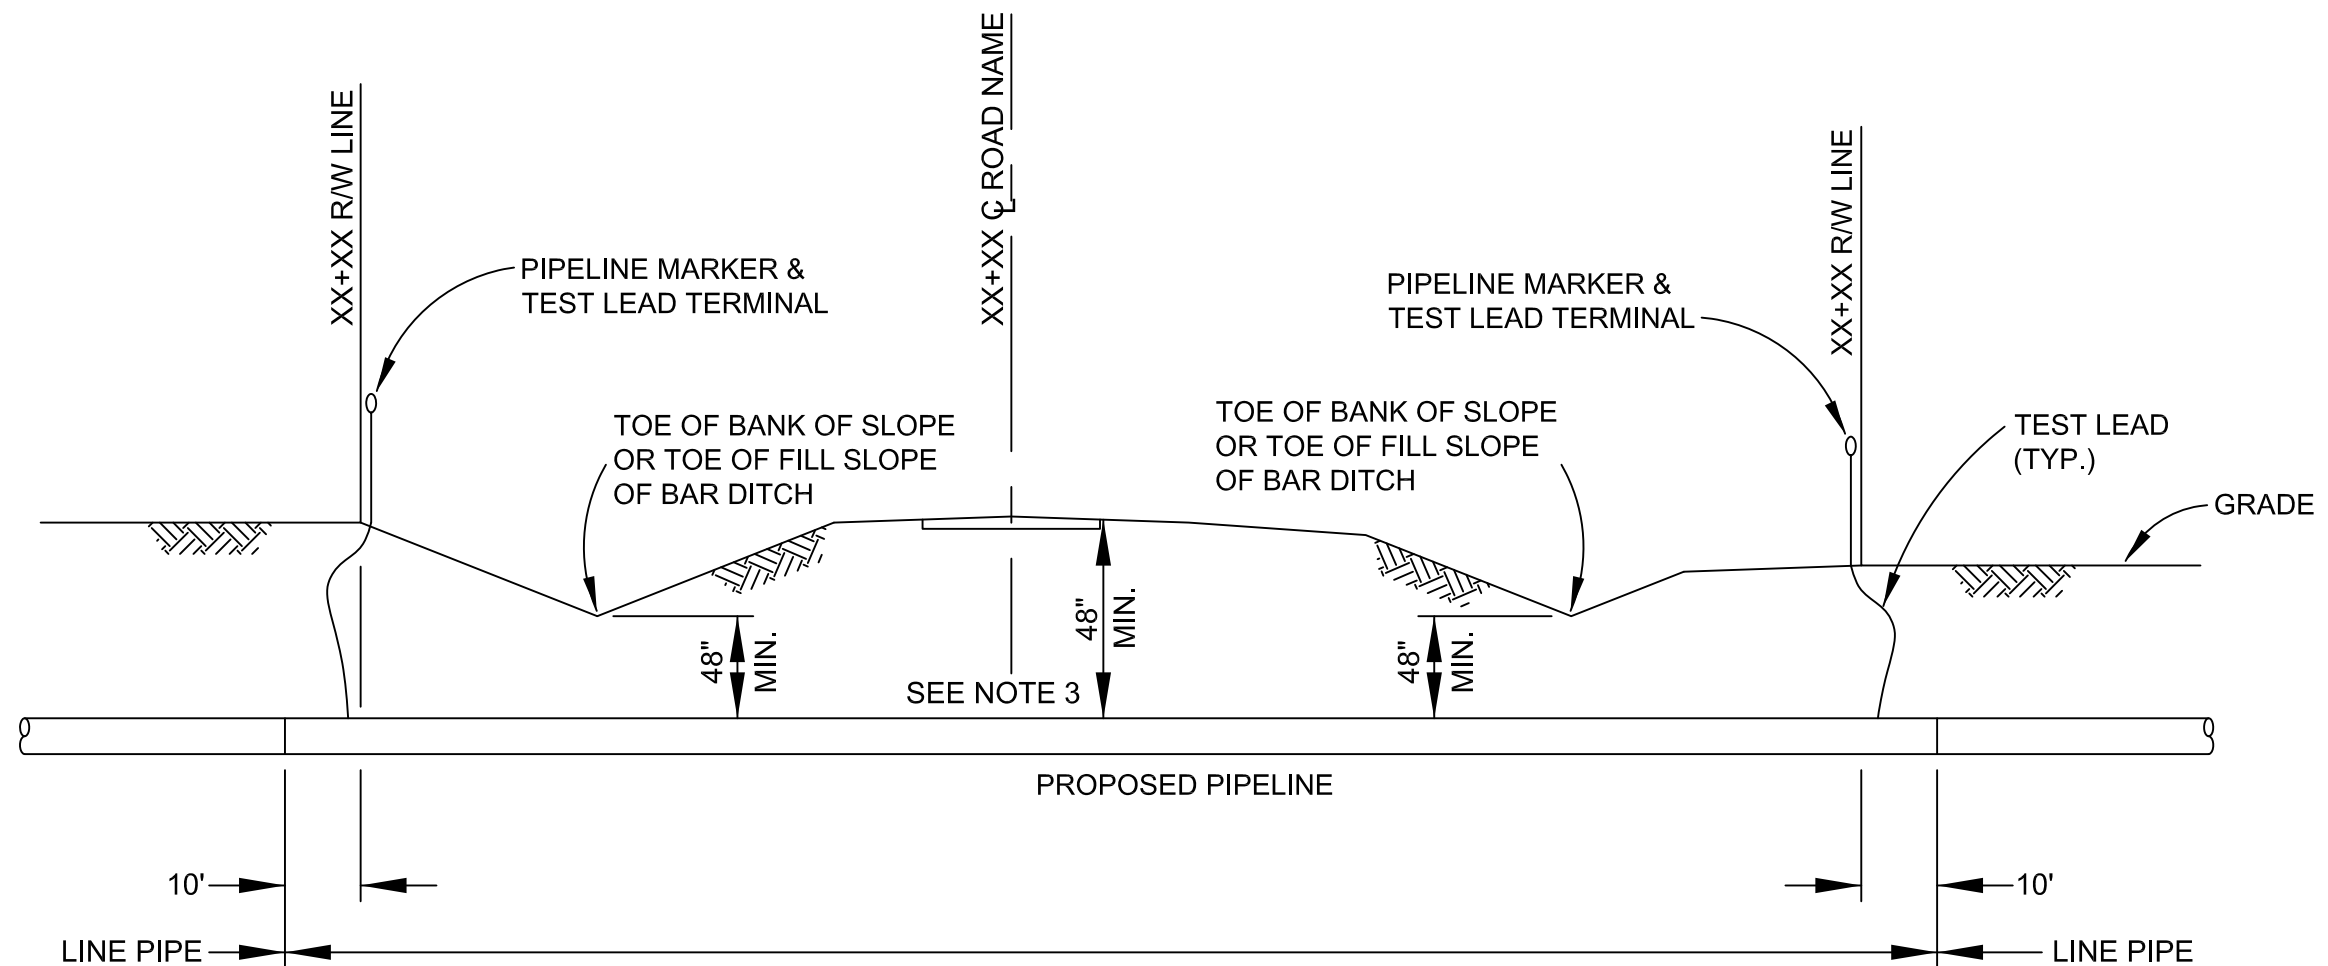

NOTES:

1. DESIGN FACTOR: IN ACCORDANCE WITH ALIGNMENT SHEETS.
2. 100% X-RAY INSPECT ALL WELDS ON CARRIER PIPE IN ACCORDANCE WITH API STANDARD 1104 AND CONTRACT DOCUMENTS.
3. DEPTH OF COVER UNDER ROAD TO TOP OF PIPE SHALL BE 4'-0" OR GREATER DEPENDING ON DITCH ELEVATION IN COMPARISON TO THE TOP OF ROAD; OR SHALL CONFORM TO THE ROAD CROSSING PERMIT, WHICHEVER IS GREATER. ROAD CROSSING PIPE TO EXTEND 10' BEYOND ON EITHER SIDE OF DESIGNATED ROAD RIGHT-OF-WAY.
4. CATHODIC TEST STATION TO BE INSTALLED (IF REQUIRED), SEE CST-P-1085-B030.
5. PIPELINE MARKER TO BE INSTALLED PER DRAWING STD-P-0100-A200 AND STD-P-0100-A205.
6. PIPELINE MARKER & TEST STATIONS TO BE INSTALLED ON ROW LINE NEXT TO FENCE IF POSSIBLE.
7. CARRIER PIPE IS TO BE COATED WITH APPROVED EXTERNAL PROTECTIVE COATING, SEE ENGINEERING SECTION #M8380.
8. CROSSING TO BE AS NEAR TO 90° TO THE CENTERLINE OF ROADWAY AS PRACTICAL.
9. CONTRACTOR TO COMPLY TO THE SPECIFICATION REQUIREMENTS.

DESIGNED IN ACCORDANCE WITH TITLE 49-PART 152 OF MINIMUM FEDERAL SAFETY STANDARDS AND GPTC GUIDE FOR GAS TRANSMISSION AND DISTRIBUTION PIPING SYSTEMS, LATEST EDITION.



REV LEVEL	DATE	BY	DESCRIPTION	CK.	APP.
A	06/03/16	BH	ISSUED FOR PERMIT	BH	FF
REVISIONS					



WTT PIPELINE

TYPICAL ROAD CROSSING

MCKENZIE COUNTY				NORTH DAKOTA			
DATE:	PLOT DATE:	DRAWN BY:	LOC. NO.:	DRAWING NUMBER:	SHEET NO.:	REV.:	
06/03/16	-	BH	-	BRC2	-	A	

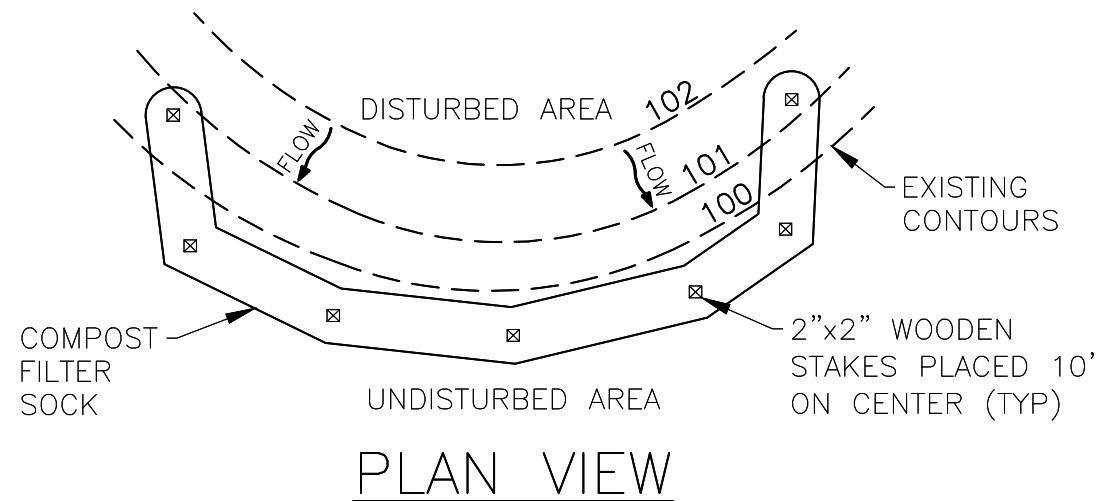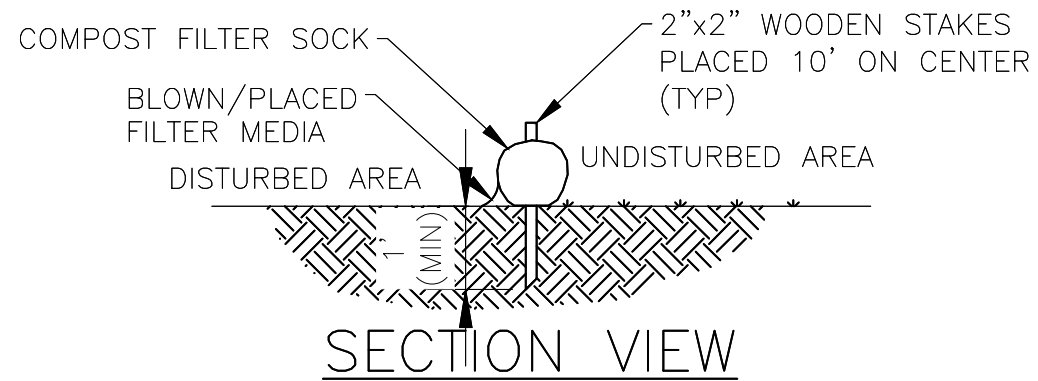

NOTES:


1. SOCK FABRIC AND COMPOST MATERIAL SHALL MEET ALL STATE STANDARDS.
2. COMPOST FILTER SOCK SHALL BE PLACED AT EXISTING LEVEL GRADE. BOTH ENDS OF THE BARRIER SHALL BE EXTENDED AT LEAST 8 FEET UP SLOPE AT 45 DEGREES TO THE MAIN BARRIER ALIGNMENT. MAXIMUM SLOPE LENGTH ABOVE ANY BARRIER SHALL NOT EXCEED THAT SPECIFIED FOR THE SIZE OF THE SOCK AND THE SLOPE OF ITS TRIBUTARY AREA.
3. TRAFFIC SHALL NOT BE PERMITTED TO CROSS COMPOST FILTER SOCKS.
4. ACCUMULATED SEDIMENT SHALL BE REMOVED WHEN IT REACHES 1/2 THE ABOVE GROUND HEIGHT OF THE BARRIER AND DISPOSED IN THE MANNER DESCRIBED ELSEWHERE IN THE PLAN.
5. COMPOST FILTER SOCKS SHALL BE INSPECTED WEEKLY AND AFTER EACH RUNOFF EVENT. DAMAGED SOCKS SHALL BE REPAIRED ACCORDING TO MANUFACTURER'S SPECIFICATIONS OR REPLACED WITHIN 24 HOURS OF INSPECTION.
6. BIO-DEGRADABLE COMPOST FILTER SOCKS SHALL BE REPLACED AFTER 6 MONTHS; PHOTO-DEGRADABLE SOCKS AFTER 1 YEARS. POLYPROPYLENE SOCKS SHALL BE REPLACED ACCORDING TO MANUFACTURER'S RECOMMENDATIONS.
7. UPON STABILIZATION OF THE AREA TRIBUTARY TO THE SOCK, STAKES SHALL BE REMOVED. THE SOCK MAY BE LEFT IN PLACE AND VEGETATED OR REMOVED. IN THE LATTER CASE, THE MESH SHALL BE CUT OPEN AND THE MULCH SPREAD AS SOIL SUPPLEMENT.

COMPOST FILTER SOCK DETAIL

SCALE: NOT TO SCALE

<small>DESIGNED IN ACCORDANCE WITH TITLE 49 PART 102 OF MINIMUM FEDERAL SAFETY STANDARDS AND SPECIFIC GUIDE FOR GAS TRANSMISSION AND DISTRIBUTION PIPING SYSTEMS, LATEST EDITION.</small>				WTT PIPELINE	
				COMPOST FILTER SOCK DETAIL	
				<small>MCKENZIE COUNTY NORTH DAKOTA</small>	
				<small>08/03/16</small>	
				<small>CFS</small>	
				<small>A</small>	

REV. LEVEL	DATE	BY	DESCRIPTION	CK.	APP.
A	08/03/16	BH	ISSUED FOR PERMIT	BH	FF
REVISIONS					

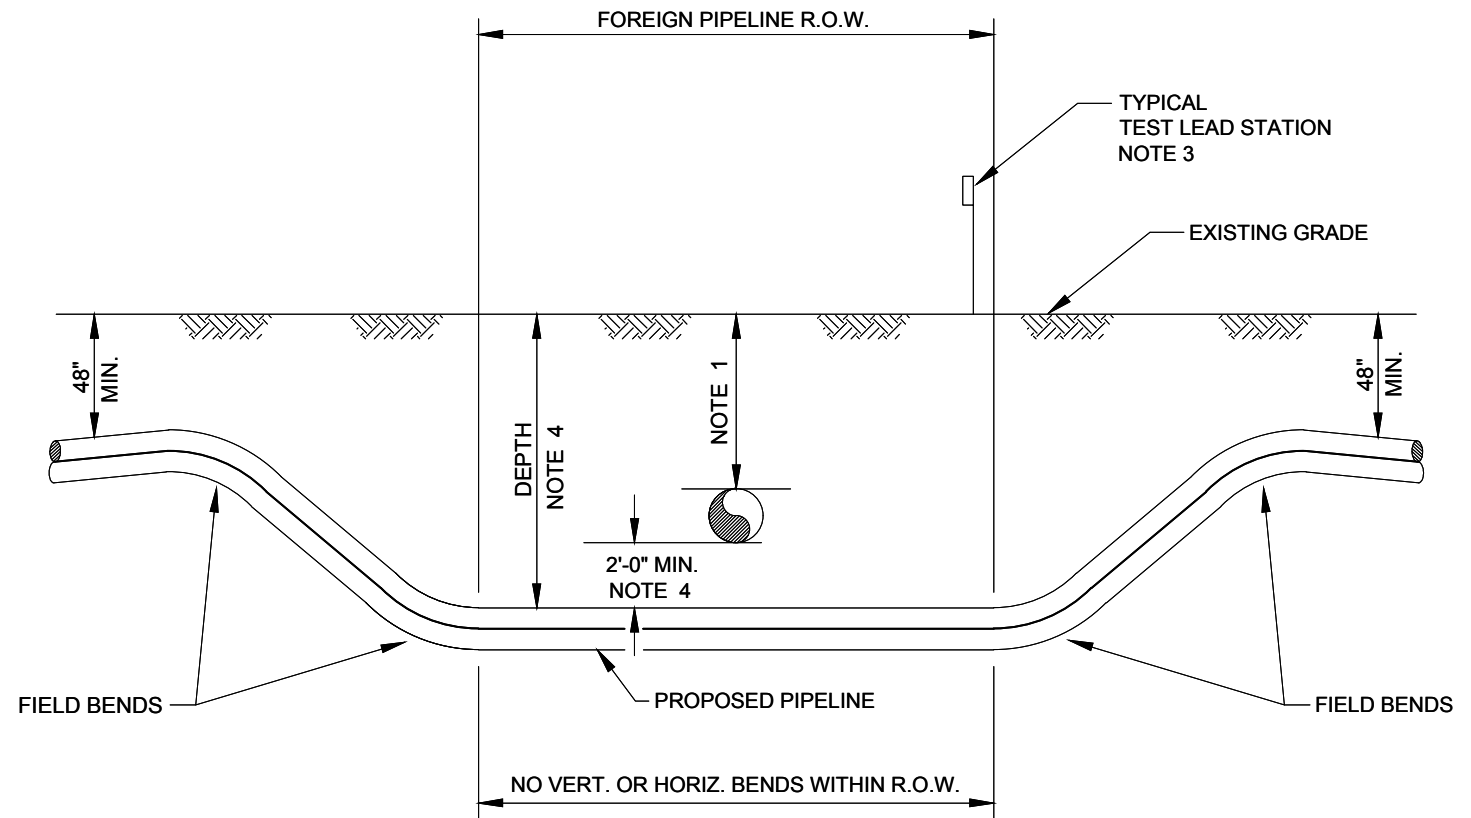


CROSS SECTION OF FOREIGN P/L R.O.W.


NOTES:

1. FOREIGN PIPELINE LOCATIONS & DEPTHS TO BE DETERMINED BY ELECTRONIC MEANS IN ADVANCE OF PIPELINE CONSTRUCTION AND CONFIRMED BY CAREFULLY EXPOSING BY HAND DIGGING WITHIN 24" IN ANY DIRECTION FROM THE PIPELINE.
2. OWNER OF FOREIGN PIPELINE(S) SHALL BE NOTIFIED A MINIMUM OF 48 HOURS IN ADVANCE OF EXCAVATION OF CROSSING.
3. TEST LEAD STATION TO BE INSTALLED WHERE PRACTICAL AT THE NEAREST FENCE, HEDGE ROW OR FIELD EDGE, AND WHERE READILY ACCESSIBLE. INSTALL COMPANY-SUPPLIED PERMANENT REFERENCE CELL AND EXTEND CELL LEAD TO TEST LEAD STATION.
4. DEPTH OF PIPELINE INCLUDING 2'-0" MIN. CLEARANCE SHALL BE MAINTAINED FOR ALL FULL ANGULAR WIDTH OF FOREIGN PIPELINE R.O.W.
5. PROPOSED PIPELINE MAY CROSS ABOVE THE FOREIGN PIPELINE(S) ONLY WHERE REQUESTED BY OR APPROVED BY FOREIGN OWNER IN WRITING.

<small>DESIGNED IN ACCORDANCE WITH TITLE 49 PART 192 OF MINIMUM FEDERAL SAFETY STANDARDS AND SPECIFIC RULES FOR GAS TRANSMISSION AND DISTRIBUTION PIPING SYSTEMS, LATEST EDITION.</small>						WTT PIPELINE FOREIGN PIPELINES CROSSING																				
<table border="1"> <thead> <tr> <th>REV. LEVEL</th> <th>DATE</th> <th>BY</th> <th>DESCRIPTION</th> <th>CK.</th> <th>APP.</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>06/03/16</td> <td>BH</td> <td>ISSUED FOR PERMIT</td> <td></td> <td></td> </tr> </tbody> </table>	REV. LEVEL	DATE	BY	DESCRIPTION	CK.	APP.	A	06/03/16	BH	ISSUED FOR PERMIT			<table border="1"> <thead> <tr> <th>NO.</th> <th>REV. DATE</th> <th>BY</th> <th>DESCRIPTION</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		NO.	REV. DATE	BY	DESCRIPTION					<small>MCKENZIE COUNTY NORTH DAKOTA</small> SHEET NO. 100		<small>DESIGN BY</small> BH <small>ISSUING NUMBER</small> FPC <small>SHEET NO.</small> 100 <small>REV.</small> A	
REV. LEVEL	DATE	BY	DESCRIPTION	CK.	APP.																					
A	06/03/16	BH	ISSUED FOR PERMIT																							
NO.	REV. DATE	BY	DESCRIPTION																							
REVISIONS																										

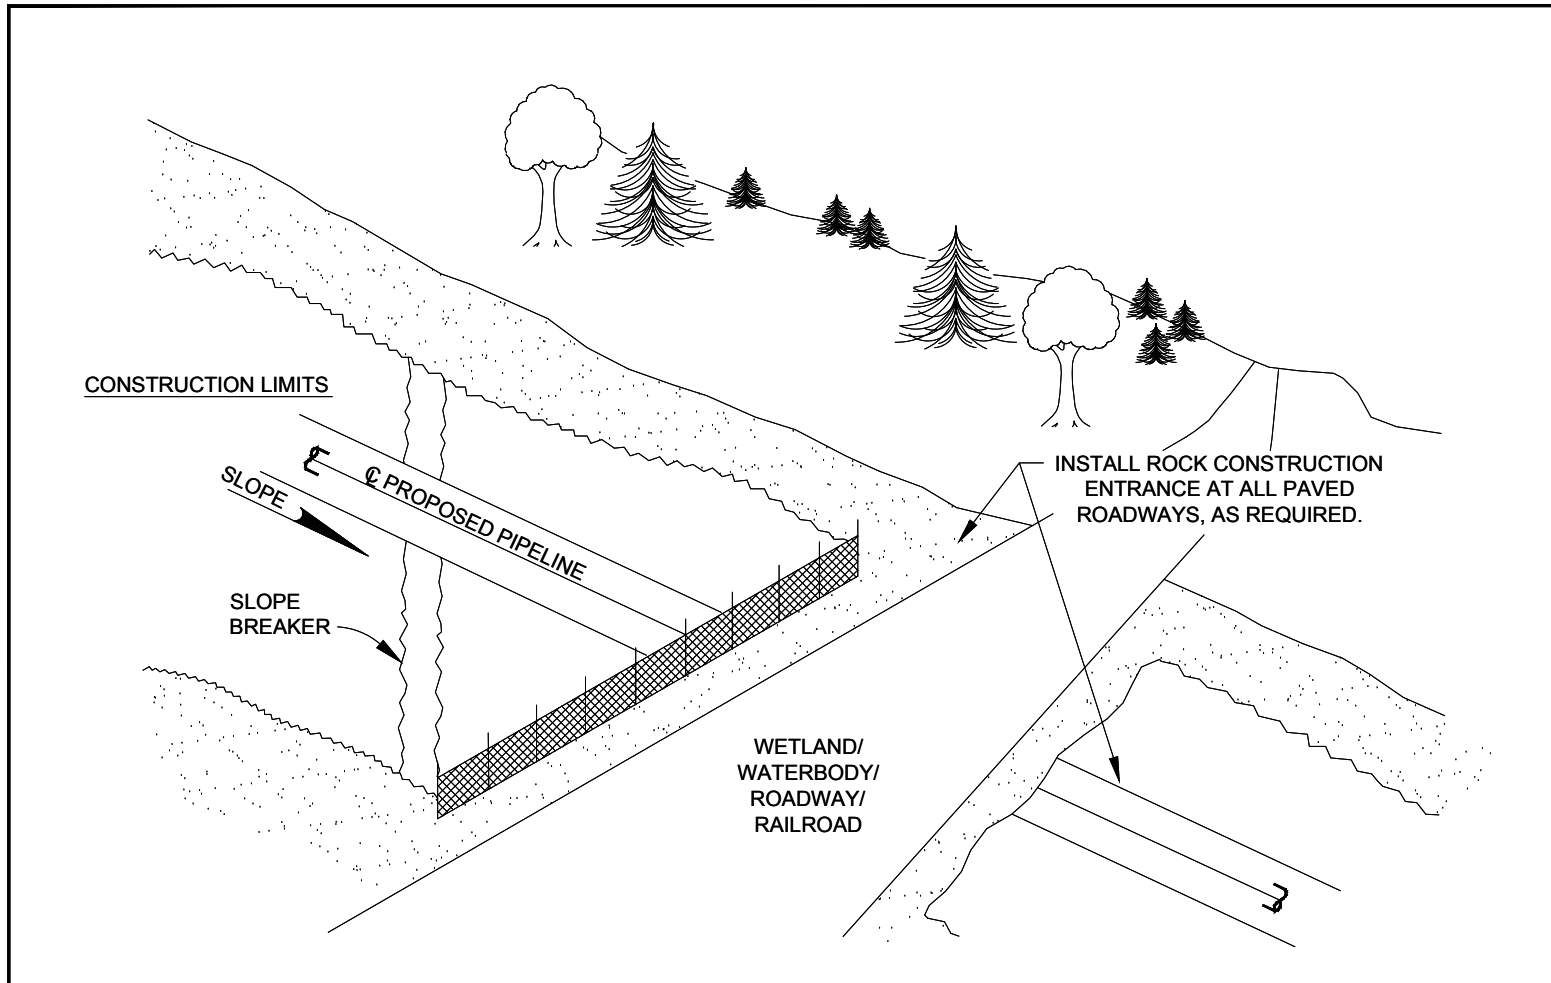

NOTES:

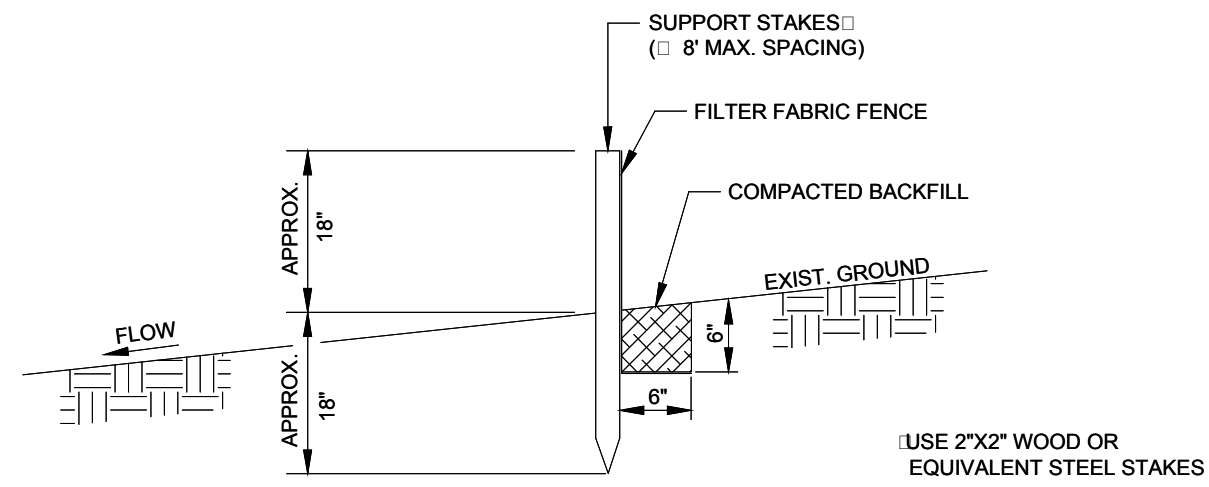

USE 2"x2" WOOD OR EQUIVALENT STEEL STAKES

PERMANENT STABILIZATION IS DEFINED AS MINIMUM, UNIFORM, PERENNIAL 70% VEGETATIVE COVER OR OTHER PERMANENT NON-VEGETATIVE COVER WITH A DENSITY SUFFICIENT TO RESIST ACCELERATED EROSION.


<small>DESIGNED IN ACCORDANCE WITH TITLE 45, PART 102 OF MINIMUM FEDERAL SAFETY STANDARDS AND OPTIC GUIDE FOR GAS TRANSMISSION AND DISTRIBUTION PIPING SYSTEMS, LATEST EDITION.</small>				WTT PIPELINE TYPICAL STANDARD 18" SILT FENCE INSTALLATION (SHEET 1 OF 2)																					
<table border="1"> <thead> <tr> <th>REV. LEVEL</th> <th>DATE</th> <th>BY</th> <th>DESCRIPTION</th> <th>CK.</th> <th>APP.</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>06/03/16</td> <td>BH</td> <td>ISSUED FOR PERMIT</td> <td></td> <td>FF</td> </tr> </tbody> </table>	REV. LEVEL	DATE	BY	DESCRIPTION	CK.	APP.	A	06/03/16	BH	ISSUED FOR PERMIT		FF	REVISIONS			<table border="1"> <tr> <td colspan="2">MCKENZIE COUNTY</td> <td colspan="2">NORTH DAKOTA</td> </tr> <tr> <td>06/03/16</td> <td></td> <td>BH</td> <td>SF1</td> </tr> </table>		MCKENZIE COUNTY		NORTH DAKOTA		06/03/16		BH	SF1
REV. LEVEL	DATE	BY	DESCRIPTION	CK.	APP.																				
A	06/03/16	BH	ISSUED FOR PERMIT		FF																				
MCKENZIE COUNTY		NORTH DAKOTA																							
06/03/16		BH	SF1																						


NOTES:

1. SILT FENCE MUST BE LEFT IN PLACE UNTIL PERMANENT STABILIZATION.
2. FILTER FABRIC FENCE MUST BE INSTALLED AT EXISTING LEVEL GRADE.
3. SEDIMENT MUST BE REMOVED WHERE ACCUMULATIONS REACH 1/2 THE ABOVE GROUND HEIGHT OF THE FENCE.
4. ANY SECTION OF SILT FENCE WHICH HAS BEEN UNDERMINED OR TOPPED MUST BE IMMEDIATELY REPLACED WITH A ROCK FILTER OUTLET.
5. AT A MINIMUM, THE FABRIC SHOULD HAVE THE FOLLOWING PROPERTIES:

FABRIC PROPERTY	MINIMUM ACCEPTABLE VALUE	TEST METHOD
GRAB TENSILE STRENGTH (lb)	120	ASTM D1682
ELONGATION AT FAILURE (%)	20% MAX.	ASTM D1682
MULLEN BURST STRENGTH (lb)	200	ASTM D3786
TRAPEZOIDAL TEAR STRENGTH (lb)	50	
PUNCTURE STRENGTH (lb)	40	ASTM D 751 (MODIFIED)
SLURRY FLOW RATE (in ³ /in ² /min)	0.3	
EQUIVALENT OPENING SIZE	30	US STD. SIEVE CW-02215
ULTRAVIOLET RADIATION STABILITY (%)	80	ASTM G-26

6. SILT FENCE MUST BE PLACED AT EXISTING LEVEL GRADE. BOTH ENDS OF THE BARRIER WILL BE EXTENDED 8' UPSLOPE AT 45 DEGREES TO THE MAIN BARRIER ALIGNMENT.

DESIGNED IN ACCORDANCE WITH TITLE 49, PART 192 OF MINIMUM FEDERAL SAFETY STANDARDS AND SPECIFIC GUIDE FOR GAS TRANSMISSION AND DISTRIBUTION PIPING SYSTEMS, LATEST EDITION.			WTT PIPELINE TYPICAL STANDARD 18" SILT FENCE INSTALLATION (SHEET 2 OF 2)																																
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>REV. LEVEL</th> <th>DATE</th> <th>BY</th> <th>DESCRIPTION</th> <th>CK.</th> <th>APP.</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>06/03/16</td> <td>BH</td> <td>ISSUED FOR PERMIT</td> <td></td> <td>FF</td> </tr> </tbody> </table>	REV. LEVEL	DATE	BY	DESCRIPTION	CK.	APP.	A	06/03/16	BH	ISSUED FOR PERMIT		FF	REVISIONS	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2">MCKENZIE COUNTY</td> <td colspan="2">NORTH DAKOTA</td> </tr> <tr> <td>DATE</td> <td>PROJ. NO.</td> <td>DRAWN BY</td> <td>DRAWING NUMBER</td> </tr> <tr> <td>06/03/16</td> <td>-</td> <td>BH</td> <td>SF1</td> </tr> </table>	MCKENZIE COUNTY		NORTH DAKOTA		DATE	PROJ. NO.	DRAWN BY	DRAWING NUMBER	06/03/16	-	BH	SF1	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>DATE</td> <td>PROJ. NO.</td> <td>DRAWN BY</td> <td>DRAWING NUMBER</td> </tr> <tr> <td>06/03/16</td> <td>-</td> <td>BH</td> <td>SF1</td> </tr> </table>	DATE	PROJ. NO.	DRAWN BY	DRAWING NUMBER	06/03/16	-	BH	SF1
REV. LEVEL	DATE	BY	DESCRIPTION	CK.	APP.																														
A	06/03/16	BH	ISSUED FOR PERMIT		FF																														
MCKENZIE COUNTY		NORTH DAKOTA																																	
DATE	PROJ. NO.	DRAWN BY	DRAWING NUMBER																																
06/03/16	-	BH	SF1																																
DATE	PROJ. NO.	DRAWN BY	DRAWING NUMBER																																
06/03/16	-	BH	SF1																																

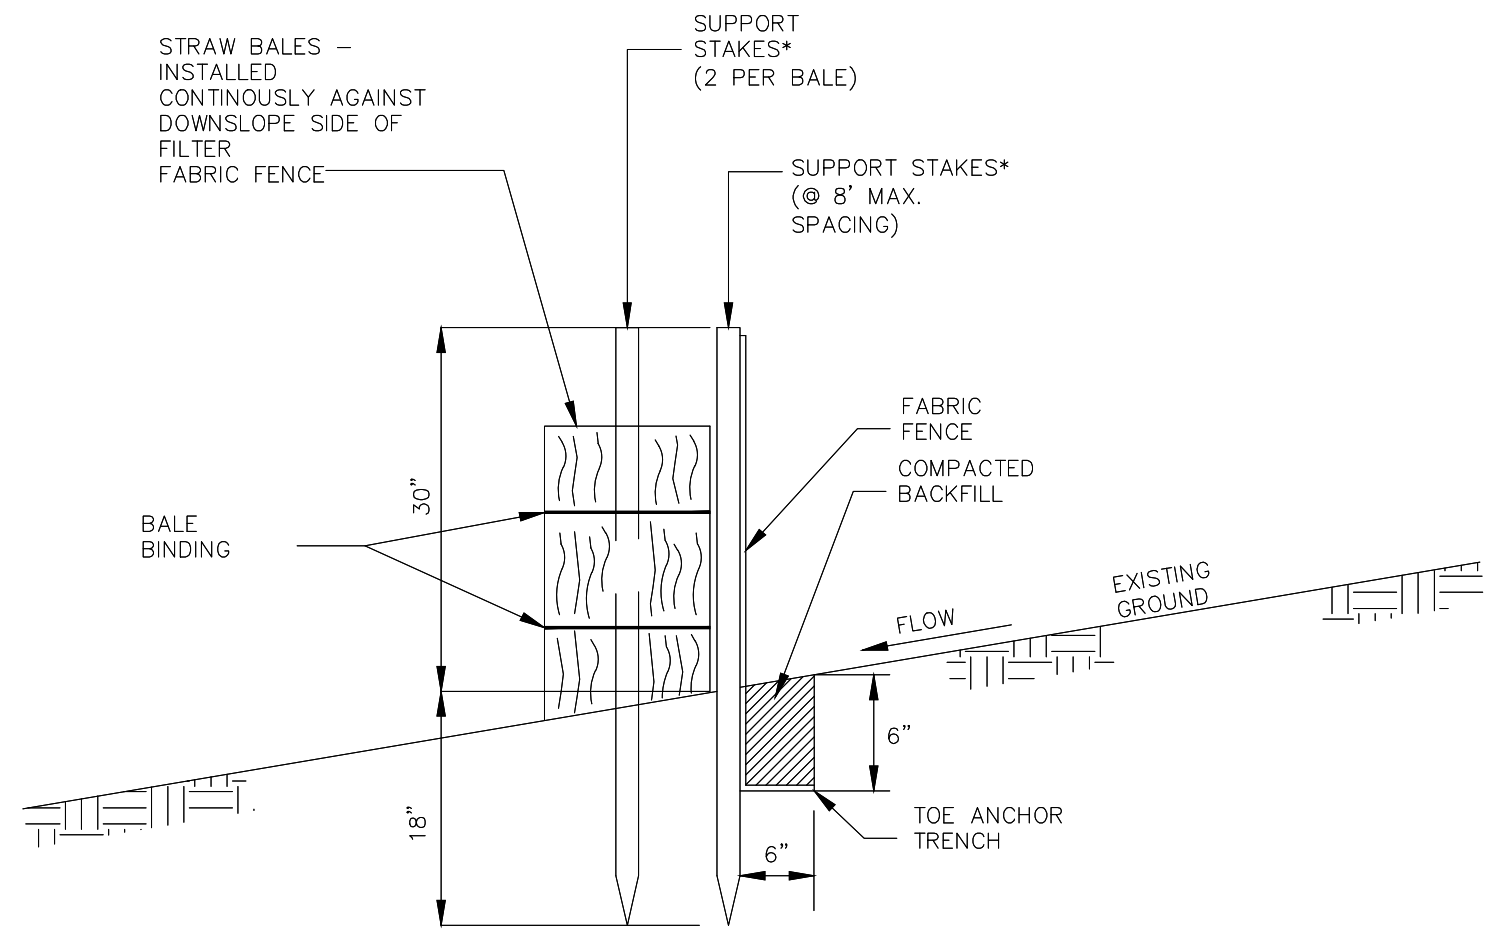

*USE 2"X2" WOOD OR EQUIVALENT STEEL STAKES.

REPLACE BALES AT LEAST EVERY 3 MONTHS.

FILTER FABRIC FENCE MUST BE INSTALLED AT EXISTING LEVEL GRADE. BOTH ENDS OF EACH FENCE SECTION MUST BE EXTENDED AT LEAST 8' UPSLOPE AT 45 DEGREES TO THE MAIN FENCE ALIGNMENT.



SEDIMENT MUST BE REMOVED WHERE ACCUMULATIONS REACH 1/2 THE ABOVE GROUND HEIGHT OF THE FENCE.

PERMANENT STABILIZATION IS DEFINED AS A MINIMUM UNIFORM, PERENNIAL 70% VEGETATIVE COVER OR OTHER PERMANENT NON-VEGTATIVE COVER WITH A DENSITY SUFFICIENT TO RESIST ACCELERATED EROSION.

SILT FENCE MUST BE LEFT IN PLACE UNTIL PERMANENT STABILIZATION.

ANY FENCE SECTION THAT HAS BEEN UNDERMINED OR TOPPED MUST BE REPLACED WITH A ROCK FILTER OUTLET.

<small>DESIGNED IN ACCORDANCE WITH TITLE 45 PART 102 OF MINIMUM FEDERAL SAFETY STANDARDS AND SPEC GUIDE FOR GAS TRANSMISSION AND DISTRIBUTION PIPING SYSTEMS, LATEST EDITION.</small>				WTP PIPELINE STANDARD CONSTRUCTION DETAIL REINFORCED 30" SILT FENCE INSTALLATION (SHEET 1 OF 3)	
<small>REV. LEVEL</small> A	<small>DATE</small> 06/03/16	<small>BY</small> BH	<small>DESCRIPTION</small> ISSUED FOR PERMIT	<small>BH</small> FF	<small>CK</small> APP.
REVISIONS			<small>MCKENZIE COUNTY NORTH DAKOTA</small> <small>DATE</small> 06/03/16 <small>REV. NO.</small> - <small>DRAWN BY</small> BH <small>DRAWING NUMBER</small> SF2 <small>SHEET NO.</small> - <small>TOTAL SHEETS</small> 3		

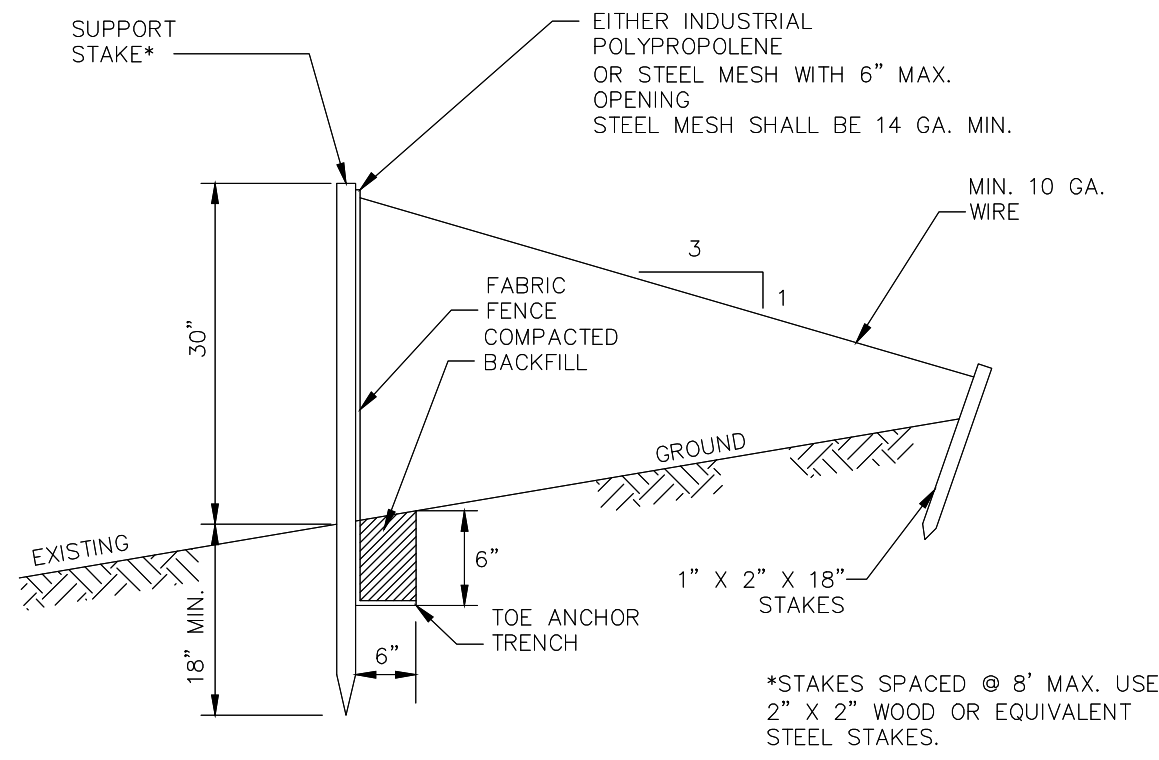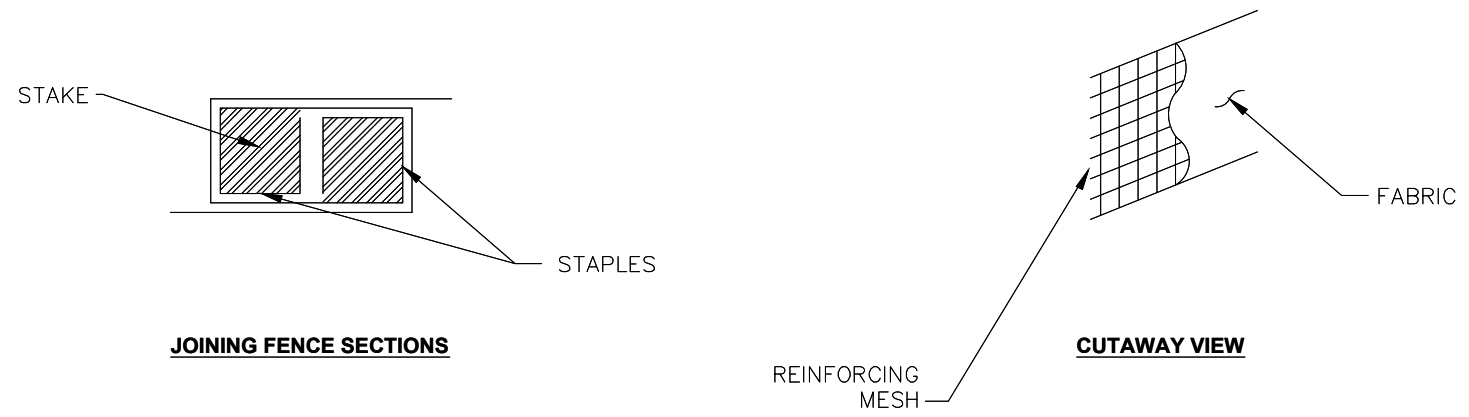

*STAKES SPACED @ 8' MAX. USE 2" X 2" WOOD OR EQUIVALENT STEEL STAKES.

FILTER FABRIC FENCE MUST BE INSTALLED AT EXISTING LEVEL GRADE. BOTH ENDS OF EACH FENCE SECTION MUST BE EXTENDED AT LEAST 8' UPSLOPE AT 45 DEGREES TO THE MAIN FENCE ALIGNMENT.



SEDIMENT MUST BE REMOVED WHERE ACCUMULATIONS REACH 1/2 THE ABOVE GROUND HEIGHT OF THE FENCE.

PERMANENT STABILIZATION IS DEFINED AS A MINIMUM UNIFORM, PERENNIAL 70% VEGETATIVE COVER OR OTHER PERMANENT NON-VEGTATIVE COVER WITH A DENSITY SUFFICIENT TO RESIST ACCELERATED EROSION.

SILT FENCE MUST BE LEFT IN PLACE UNTIL PERMANENT STABILIZATION.


ANY SECTION OF SILT FENCE THAT HAS BEEN UNDERMINED OR TOPPED MUST BE REPLACED WITH A ROCK FILTER OUTLET.

<small>DESIGNED IN ACCORDANCE WITH TITLE 49-PART 102 OF MINIMUM FEDERAL SAFETY STANDARDS AND OPTIC GUIDE FOR GAS TRANSMISSION AND DISTRIBUTION PIPING SYSTEMS, LATEST EDITION.</small>						WTT PIPELINE					
						STANDARD CONSTRUCTION DETAIL REINFORCED 30" SILT FENCE INSTALLATION (SHEET 2 OF 3)					
<small>REVISIONS</small>		<small>DATE</small>		<small>BY</small>		<small>DESCRIPTION</small>		<small>CK.</small>		<small>APP.</small>	
A		06/03/16		BH		ISSUED FOR PERMIT		BH		FF	
MCKENZIE COUNTY		DATE		DRAWN BY		LIC. NO.		DRAWING NUMBER		NORTH DAKOTA	
06/03/16		-		BH		-		SF2		-	

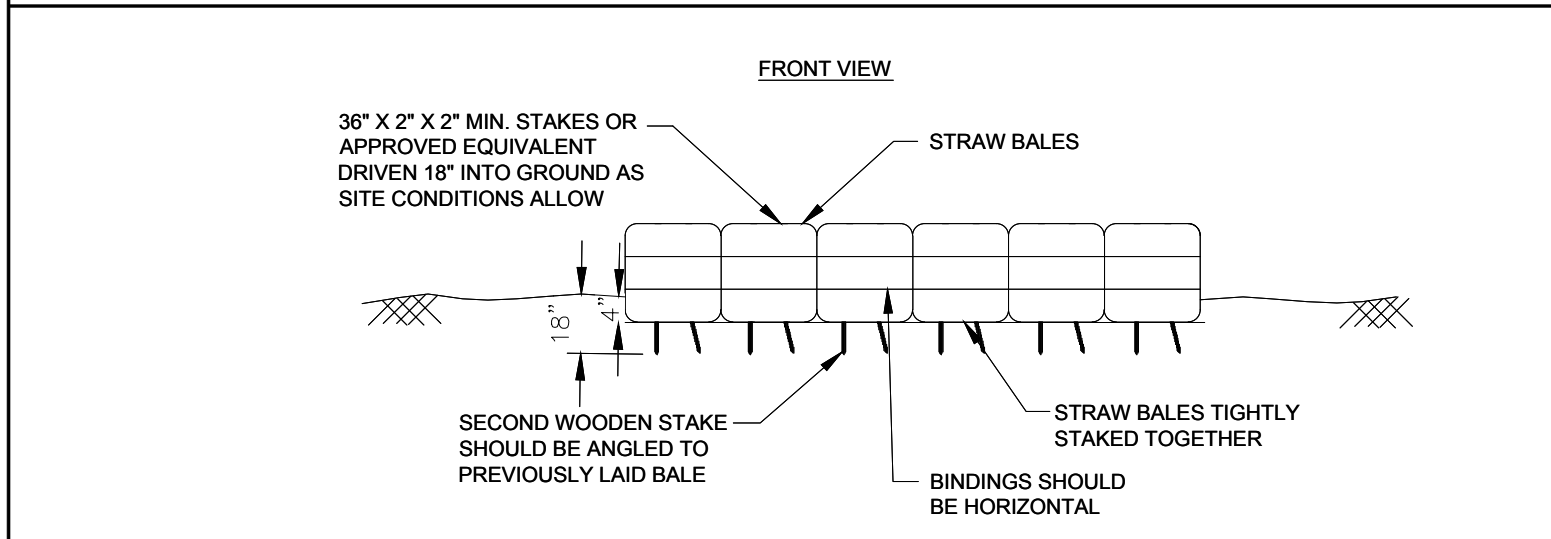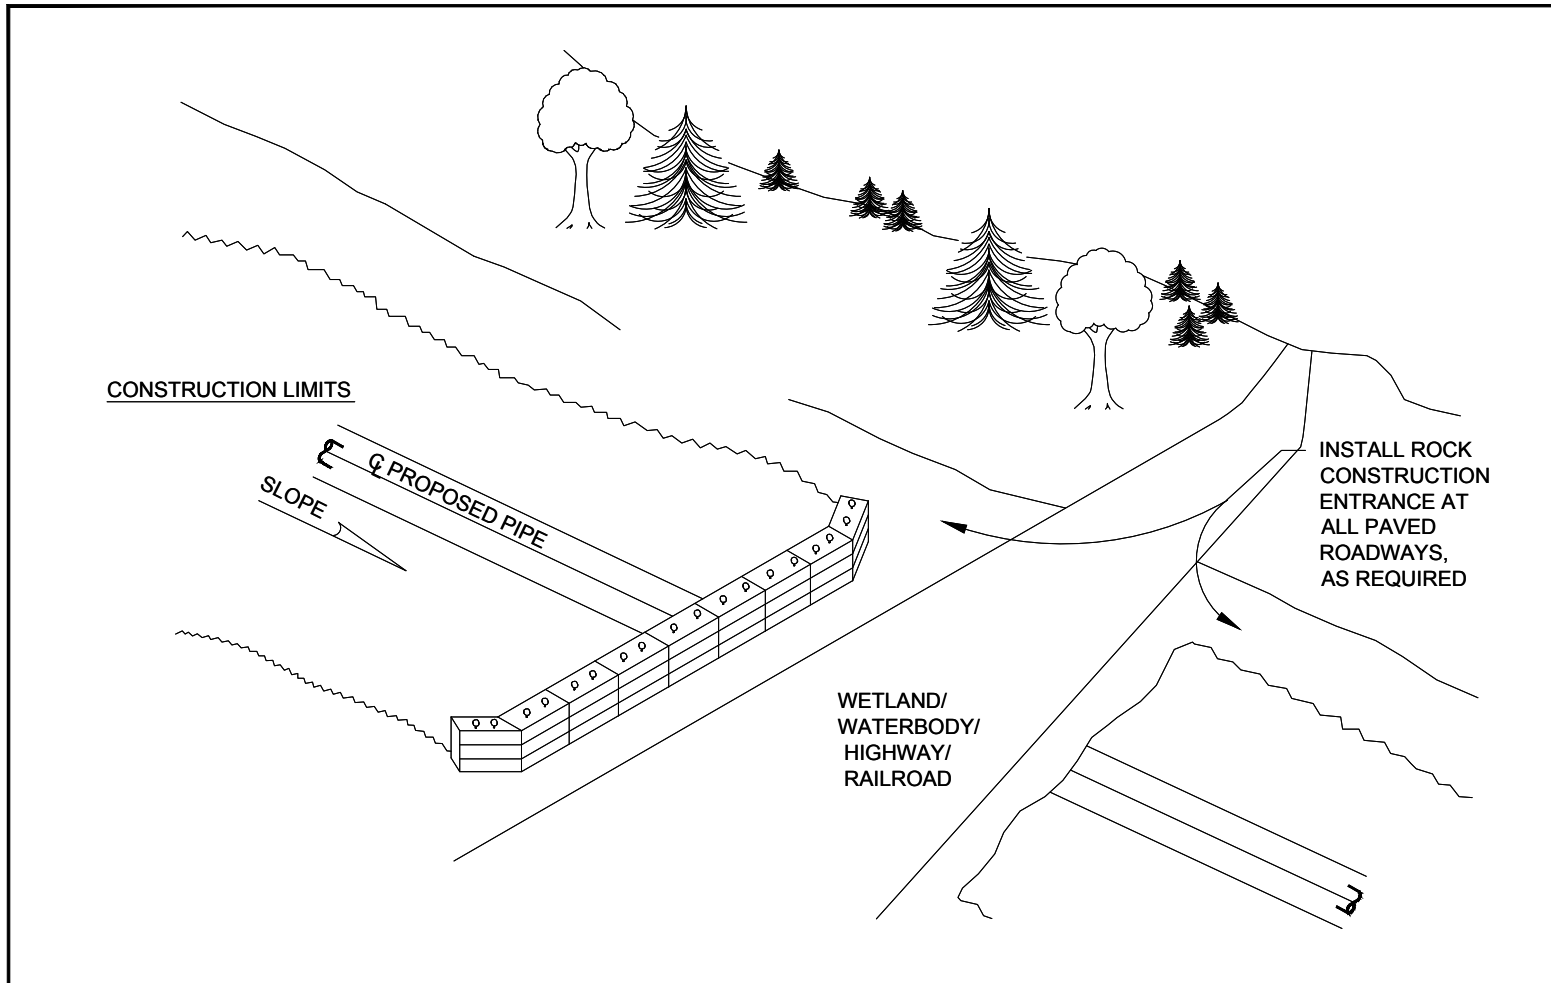


- NOTES:**
1. STRAW BALES TO BE EMBEDDED 4" MIN. INTO GROUND AS SITE CONDITIONS ALLOW.
 2. SEDIMENT SHALL BE REMOVED WHEN ACCUMULATIONS REACH 1/3 THE ABOVE GROUNDS HEIGHT OF THE BARRIER.
 3. STRAW BALES REMOVED FOR ACCESS PURPOSES DURING THE DAY MUST BE REINSTALLED AFTER THE CONSTRUCTION ACTIVITY HAS PASSED THROUGH OR BY THE END OF THE DAY.
 4. STRAW BALES SHOULD NOT BE USED FOR PROJECTS LASTING MORE THAN 3 MONTHS.
 5. STAKES TO BE DRIVEN FLUSH WITH THE TOP OF THE BALE. BOTH ENDS OF THE BARRIER TO BE EXTENDED AT LEAST 8' UP SLOPE AT 45 DEGREES TO MAIN BARRIER ALIGNMENT.
 6. STRAW BALE BARRIERS THAT ARE UNDERMINED OR TOPPED SHALL BE REPLACED WITH A ROCK FILTER OUTLET.
 7. BALES WILL BE REMOVED WHEN PERMANENT STABILIZATION IS ACHIEVED.
 8. COMPACTED BACKFILL WILL BE PLACED ON DISTURBED SIDE.

DESIGNED IN ACCORDANCE WITH TITLE 49, PART 102 OF MINIMUM FEDERAL SAFETY STANDARDS AND SPECIFICATIONS FOR GAS TRANSMISSION AND DISTRIBUTION PIPING SYSTEMS, LATEST EDITION.				NORTHSTAR MIDSTREAM		WTT PIPELINE	
				TYPICAL STRAW BALE INSTALLATION		NORTH DAKOTA	
				MCKENZIE COUNTY		SHEET NO. ST1	
				DATE		BY	
				06/03/16		BH	
				ISSUED FOR PERMIT		ST1	
				REVISIONS		APP.	

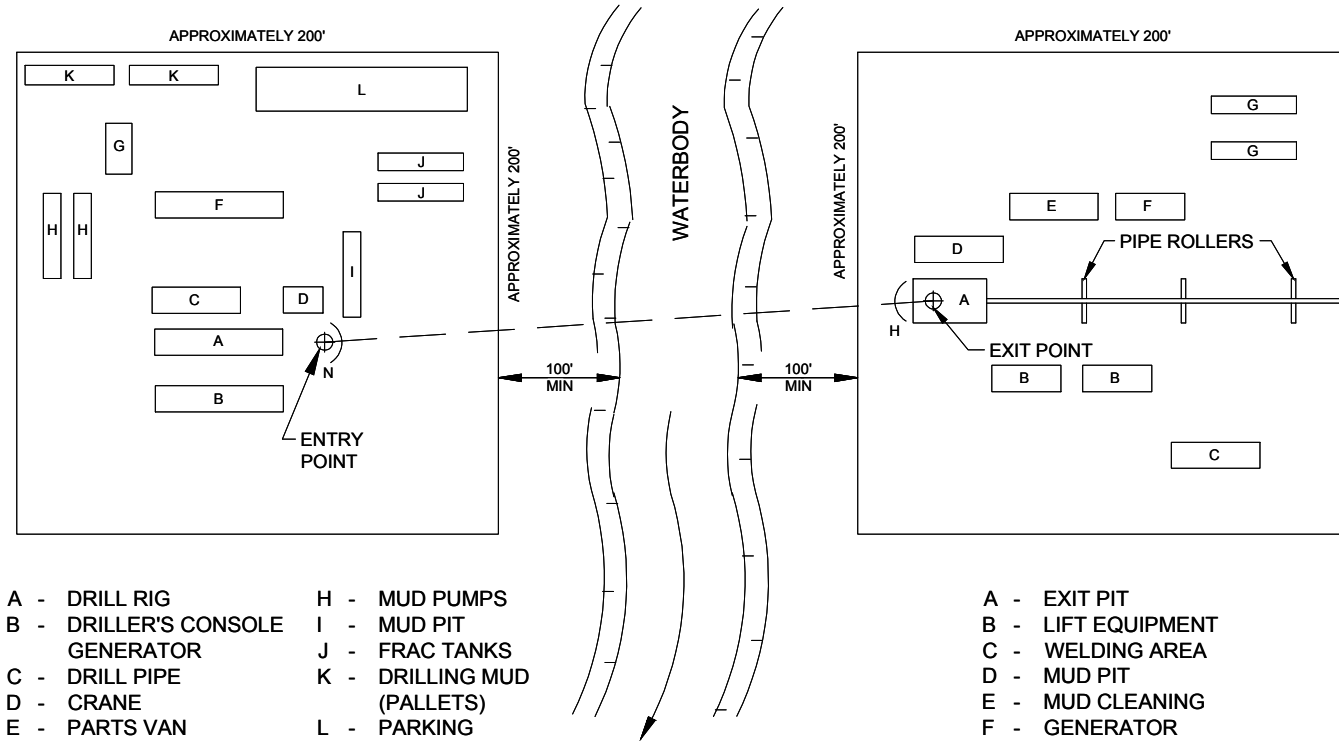

- A - DRILL RIG
- B - DRILLER'S CONSOLE
- C - DRILL PIPE
- D - CRANE
- E - PARTS VAN
- F - MUD CLEANING UNIT
- G - MUD MIXING TANK
- H - MUD PUMPS
- I - MUD PIT
- J - FRAC TANKS
- K - DRILLING MUD (PALLETS)
- L - PARKING
- M - OFFICE TRAILER
- N - CONTAINMENT BERM


- A - EXIT PIT
- B - LIFT EQUIPMENT
- C - WELDING AREA
- D - MUD PIT
- E - MUD CLEANING
- F - GENERATOR
- G - FRAC TANKS
- H - CONTAINMENT BERM

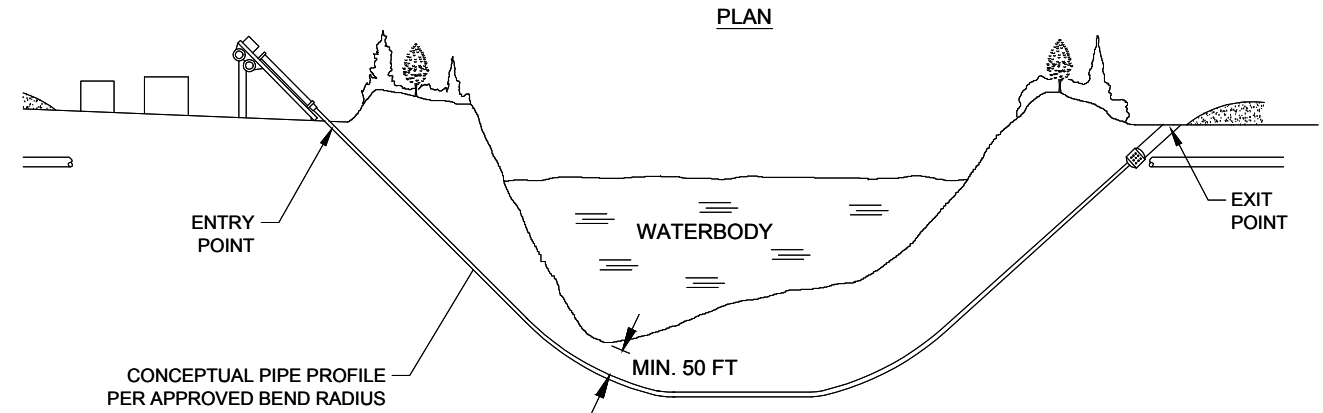

- NOTES:**
1. SET UP DRILLING EQUIPMENT A MINIMUM OF 300 FEET FROM THE EDGE OF THE WATERCOURSE. DO NOT CLEAR OR GRADE WITHIN THE 100 FOOT ZONE.
 2. ENSURE THAT ONLY BENTONITE BASED DRILLING MUD IS USED. DO NOT ALLOW THE USE OF ANY ADDITIVES TO THE DRILLING MUD WITHOUT THE APPROVAL OF COMPANY'S INSPECTOR.
 3. INSTALL SUITABLE DRILLING MUD TANKS OR SUMPS TO PREVENT CONTAMINATION OF WATERCOURSE.
 4. INSTALL BERMS DOWNSLOPE FROM THE DRILL ENTRY AND ANTICIPATED EXIT POINTS TO CONTAIN ANY RELEASE OF DRILLING MUD.
 5. DISPOSE OF DRILLING MUD IN ACCORDANCE WITH THE APPROPRIATE REGULATORY AUTHORITY REQUIREMENTS.

DRAWING DEPICTED IS SUPERSEDED BY WRITTEN STANDARD, SCOPE OF WORK OR LINE LIST.

DESIGNED IN ACCORDANCE WITH TITLE 45 PART 162 OF MINIMUM FEDERAL SAFETY STANDARDS AND SPECIFIC GUIDE FOR GAS TRANSMISSION AND DISTRIBUTION PIPING SYSTEMS, LATEST EDITION.			WTP PIPELINE TYPICAL WATERBODY CROSSING HORIZONTAL DIRECTIONAL DRILLING																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>REV. LEVEL</th> <th>DATE</th> <th>BY</th> <th>DESCRIPTION</th> <th>CK.</th> <th>APP.</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>06/03/16</td> <td>BH</td> <td>ISSUED FOR PERMIT</td> <td></td> <td>FF</td> </tr> </tbody> </table>	REV. LEVEL	DATE	BY	DESCRIPTION	CK.	APP.	A	06/03/16	BH	ISSUED FOR PERMIT		FF	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">REVISIONS</th> </tr> </thead> <tbody> <tr> <td style="width: 50%;"></td> <td style="width: 50%;"></td> </tr> </tbody> </table>	REVISIONS				<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2">MCKENZIE COUNTY</td> <td colspan="2">NORTH DAKOTA</td> </tr> <tr> <td>DATE</td> <td>REVISED</td> <td>DRAWN BY</td> <td>DRAWING NUMBER</td> </tr> <tr> <td>06/03/16</td> <td>-</td> <td>BH</td> <td>WCHDD</td> </tr> </table>	MCKENZIE COUNTY		NORTH DAKOTA		DATE	REVISED	DRAWN BY	DRAWING NUMBER	06/03/16	-	BH	WCHDD
REV. LEVEL	DATE	BY	DESCRIPTION	CK.	APP.																									
A	06/03/16	BH	ISSUED FOR PERMIT		FF																									
REVISIONS																														
MCKENZIE COUNTY		NORTH DAKOTA																												
DATE	REVISED	DRAWN BY	DRAWING NUMBER																											
06/03/16	-	BH	WCHDD																											

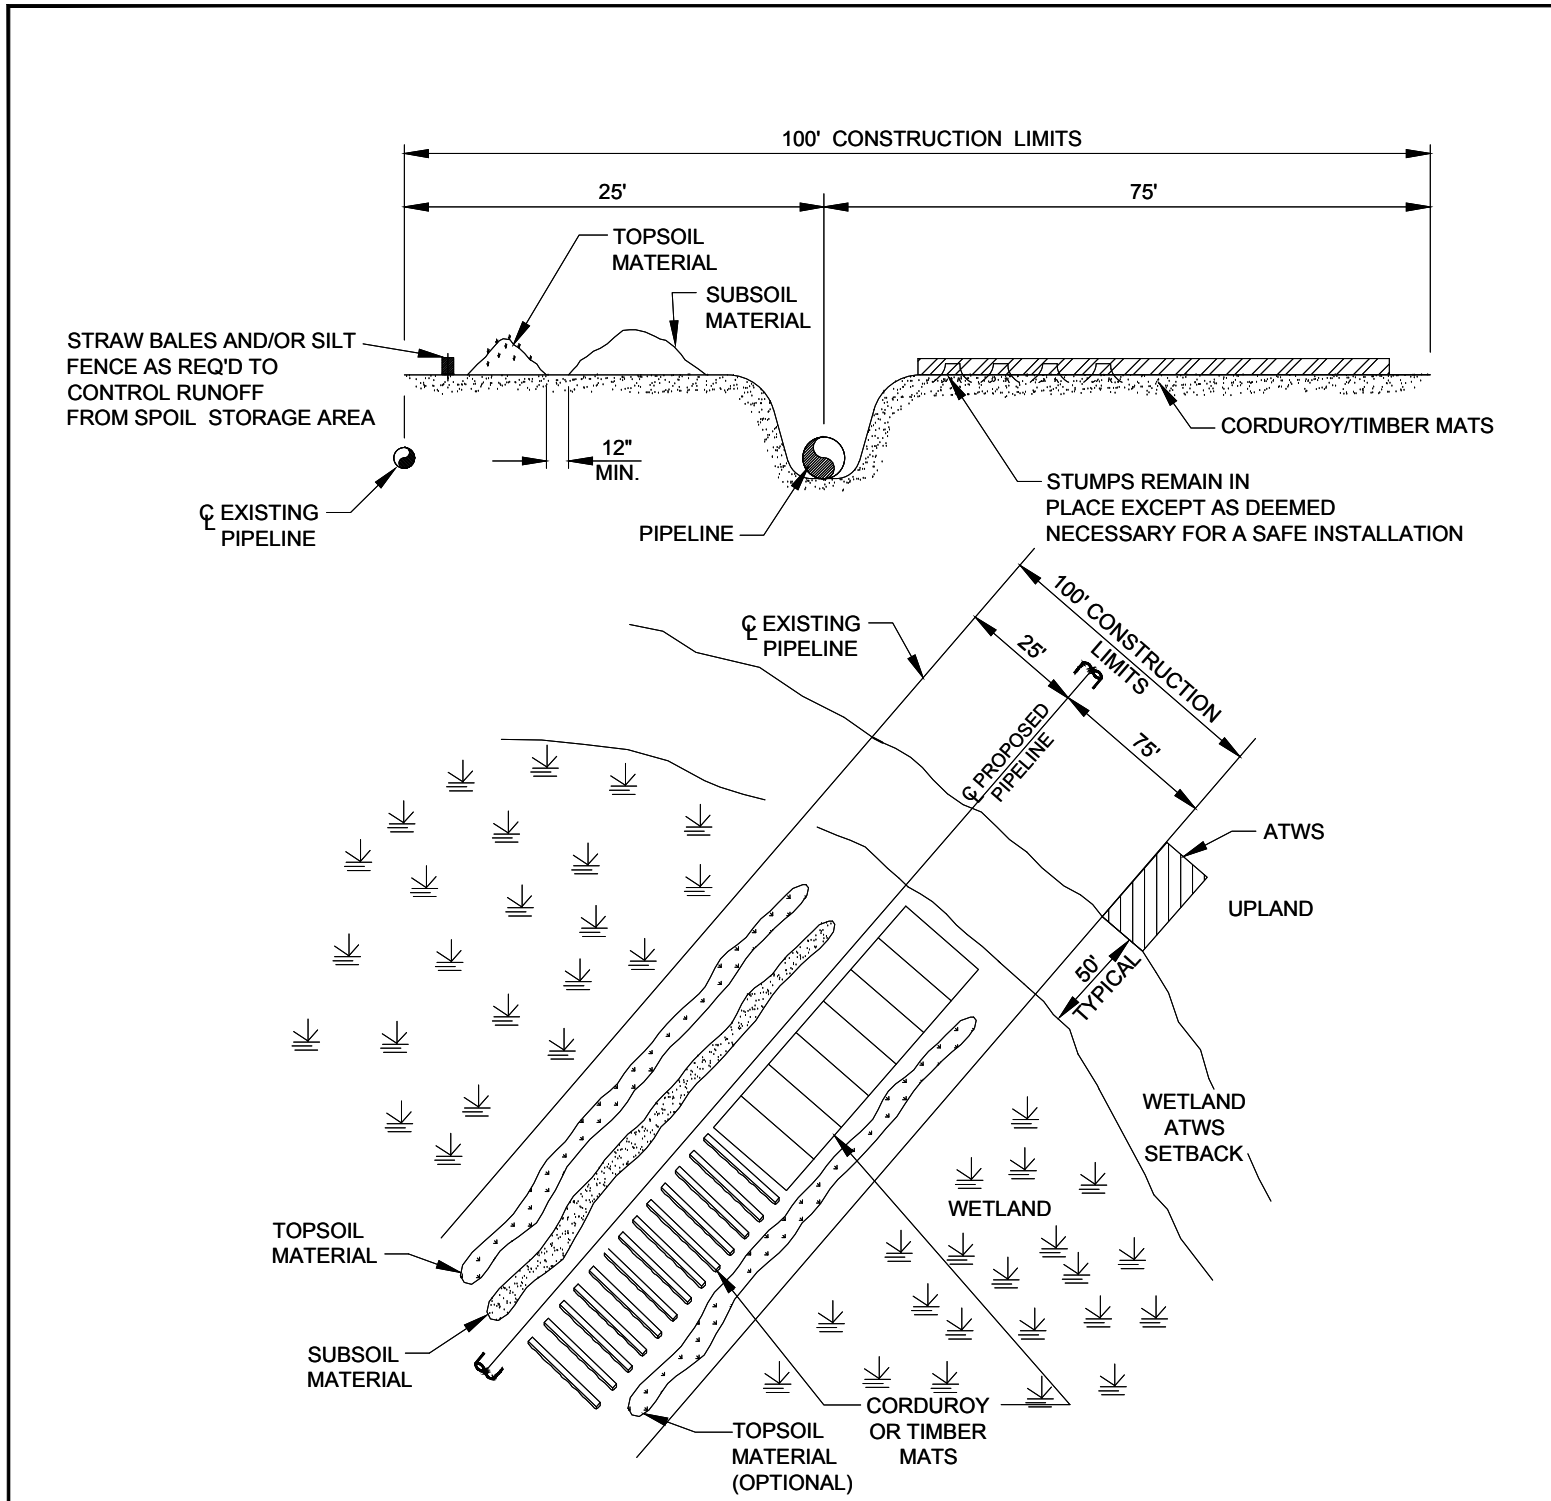

NOTES:

1. SEGREGATE TOPSOIL FROM THE AREA DISTURBED BY TRENCHING, EXCEPT IN AREAS WHERE STANDING WATER IS PRESENT OR SOILS ARE SATURATED OR FROZEN.
2. RE-SEED WITH ANNUAL RYEGRASS @ 40 LBS/ACRE (NOT TO EXCEED 48 LBS/ACRE) IN ALL AREAS WITHOUT STANDING WATER UNLESS ALTERNATIVES HAVE BEEN APPROVED BY MANAGING AGENCY.
3. NO FERTILIZER OR LIME SHALL BE USED.
4. INSTALL TRENCH PLUGS & WATERBAR ON BOTH SIDES OF WETLAND IF THE HYDROLOGICAL CONDITIONS WOULD DRAIN THE WETLAND.
5. DO NOT USE LIQUID MULCH BINDERS WITHIN 100' OF WETLANDS OR WATERBODIES.
6. IT IS ACCEPTABLE FOR E&S BMPs TO BE TEMPORARILY REMOVED FROM EQUIPMENT CROSSING PATHWAYS DURING PERIODS OF ACTIVE CONSTRUCTION IF THESE CONTROLS WILL BE PROPERLY REINSTALLED AT THE END OF EACH WORK DAY.
7. WETLAND MATS WILL BE PERMANENTLY REMOVED AFTER CLEAN UP/RESTORATION
8. MATS WILL BE 12' WIDE AND LENGTH IS DEPENDENT ON THE WETLAND CROSSING LENGTH FROM START TO END.

DESIGNED IN ACCORDANCE WITH TITLE 49 PART 102 OF MINIMUM FEDERAL SAFETY STANDARDS AND SPECIFICATIONS FOR GAS TRANSMISSION AND DISTRIBUTION PIPING SYSTEMS, LATEST EDITION.			WTT PIPELINE TYPICAL WETLAND CONSTRUCTION																																		
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 5%;">REV. LEVEL</th> <th style="width: 10%;">DATE</th> <th style="width: 10%;">BY</th> <th style="width: 50%;">DESCRIPTION</th> <th style="width: 10%;">CK.</th> <th style="width: 10%;">APP.</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">A</td> <td style="text-align: center;">06/03/16</td> <td style="text-align: center;">BH</td> <td>ISSUED FOR PERMIT</td> <td></td> <td></td> </tr> </tbody> </table>	REV. LEVEL	DATE	BY	DESCRIPTION	CK.	APP.	A	06/03/16	BH	ISSUED FOR PERMIT			<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%;">REV. LEVEL</th> <th style="width: 10%;">DATE</th> <th style="width: 10%;">BY</th> <th style="width: 50%;">DESCRIPTION</th> <th style="width: 10%;">CK.</th> <th style="width: 10%;">APP.</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> <td> </td> <td> </td> <td> </td> <td> </td> </tr> </tbody> </table>	REV. LEVEL	DATE	BY	DESCRIPTION	CK.	APP.							<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 20%;">MCKENZIE COUNTY</td> <td style="width: 20%;">DRAWN BY</td> <td style="width: 20%;">DATE</td> <td style="width: 20%;">DRAWING NUMBER</td> <td style="width: 20%;">SHEET NO. OF</td> </tr> <tr> <td>06/03/16</td> <td>BH</td> <td></td> <td>WW2A</td> <td>A</td> </tr> </table>	MCKENZIE COUNTY	DRAWN BY	DATE	DRAWING NUMBER	SHEET NO. OF	06/03/16	BH		WW2A	A	NORTH DAKOTA
REV. LEVEL	DATE	BY	DESCRIPTION	CK.	APP.																																
A	06/03/16	BH	ISSUED FOR PERMIT																																		
REV. LEVEL	DATE	BY	DESCRIPTION	CK.	APP.																																
MCKENZIE COUNTY	DRAWN BY	DATE	DRAWING NUMBER	SHEET NO. OF																																	
06/03/16	BH		WW2A	A																																	