

June 13, 2024

Via Hand Delivery & Electronic Mail

Mr. Steve Kahl
North Dakota Public Service Commission
600 E. Boulevard, Dept. 408
Bismarck, ND 58505-0480
ndpsc@nd.gov

In re: Cerilon GTL ND Inc.
Cerilon GTL North Dakota Project
Siting Application – Williams County
Case No. PU-23-325
OAH File No. 20230374
Our File No. 201121-000004

Dear Mr. Kahl:

Enclosed for filing on behalf of Cerilon GTL ND Inc., please find eight copies of each of the following:

- 1) Hearing Display Map;
- 2) Operating Diagram;
- 3) Unexecuted Proposed Certification Relating to Order Provisions and Tree and Shrub Mitigation Specifications (redlined version); and
- 4) Proposed Exhibit List.

Please feel free to contact me if you have any questions. Thank you.

Sincerely,



Wade C. Mann


WCM/lh

Enc.


29 PU-23-325 Filed 06/13/2024 Pages: 13
Hearing Display Map, Operating Diagram, Unexecuted Proposed Certification
Relating to Order Provisions & Tree & Shrub Mitigation Spec & Proposed Exhibit List
Cerilon GTL ND Inc.
Wade Mann, Crowley Fleck, PLLP

cc:	ALJ Hope L. Hogan	(via email & hand delivery)	Rochelle Harding	(via email)
	John Schuh	(via email)	Jeff Pendrel	(via email)
	Victor Schock	(via email)	Erik Edison	(via email)
	Casey Furey	(via email)		

BILLINGS BISMARCK BOZEMAN BUTTE CASPER CHEYENNE HELENA KALISPELL MISSOULA SHERIDAN WILLISTON

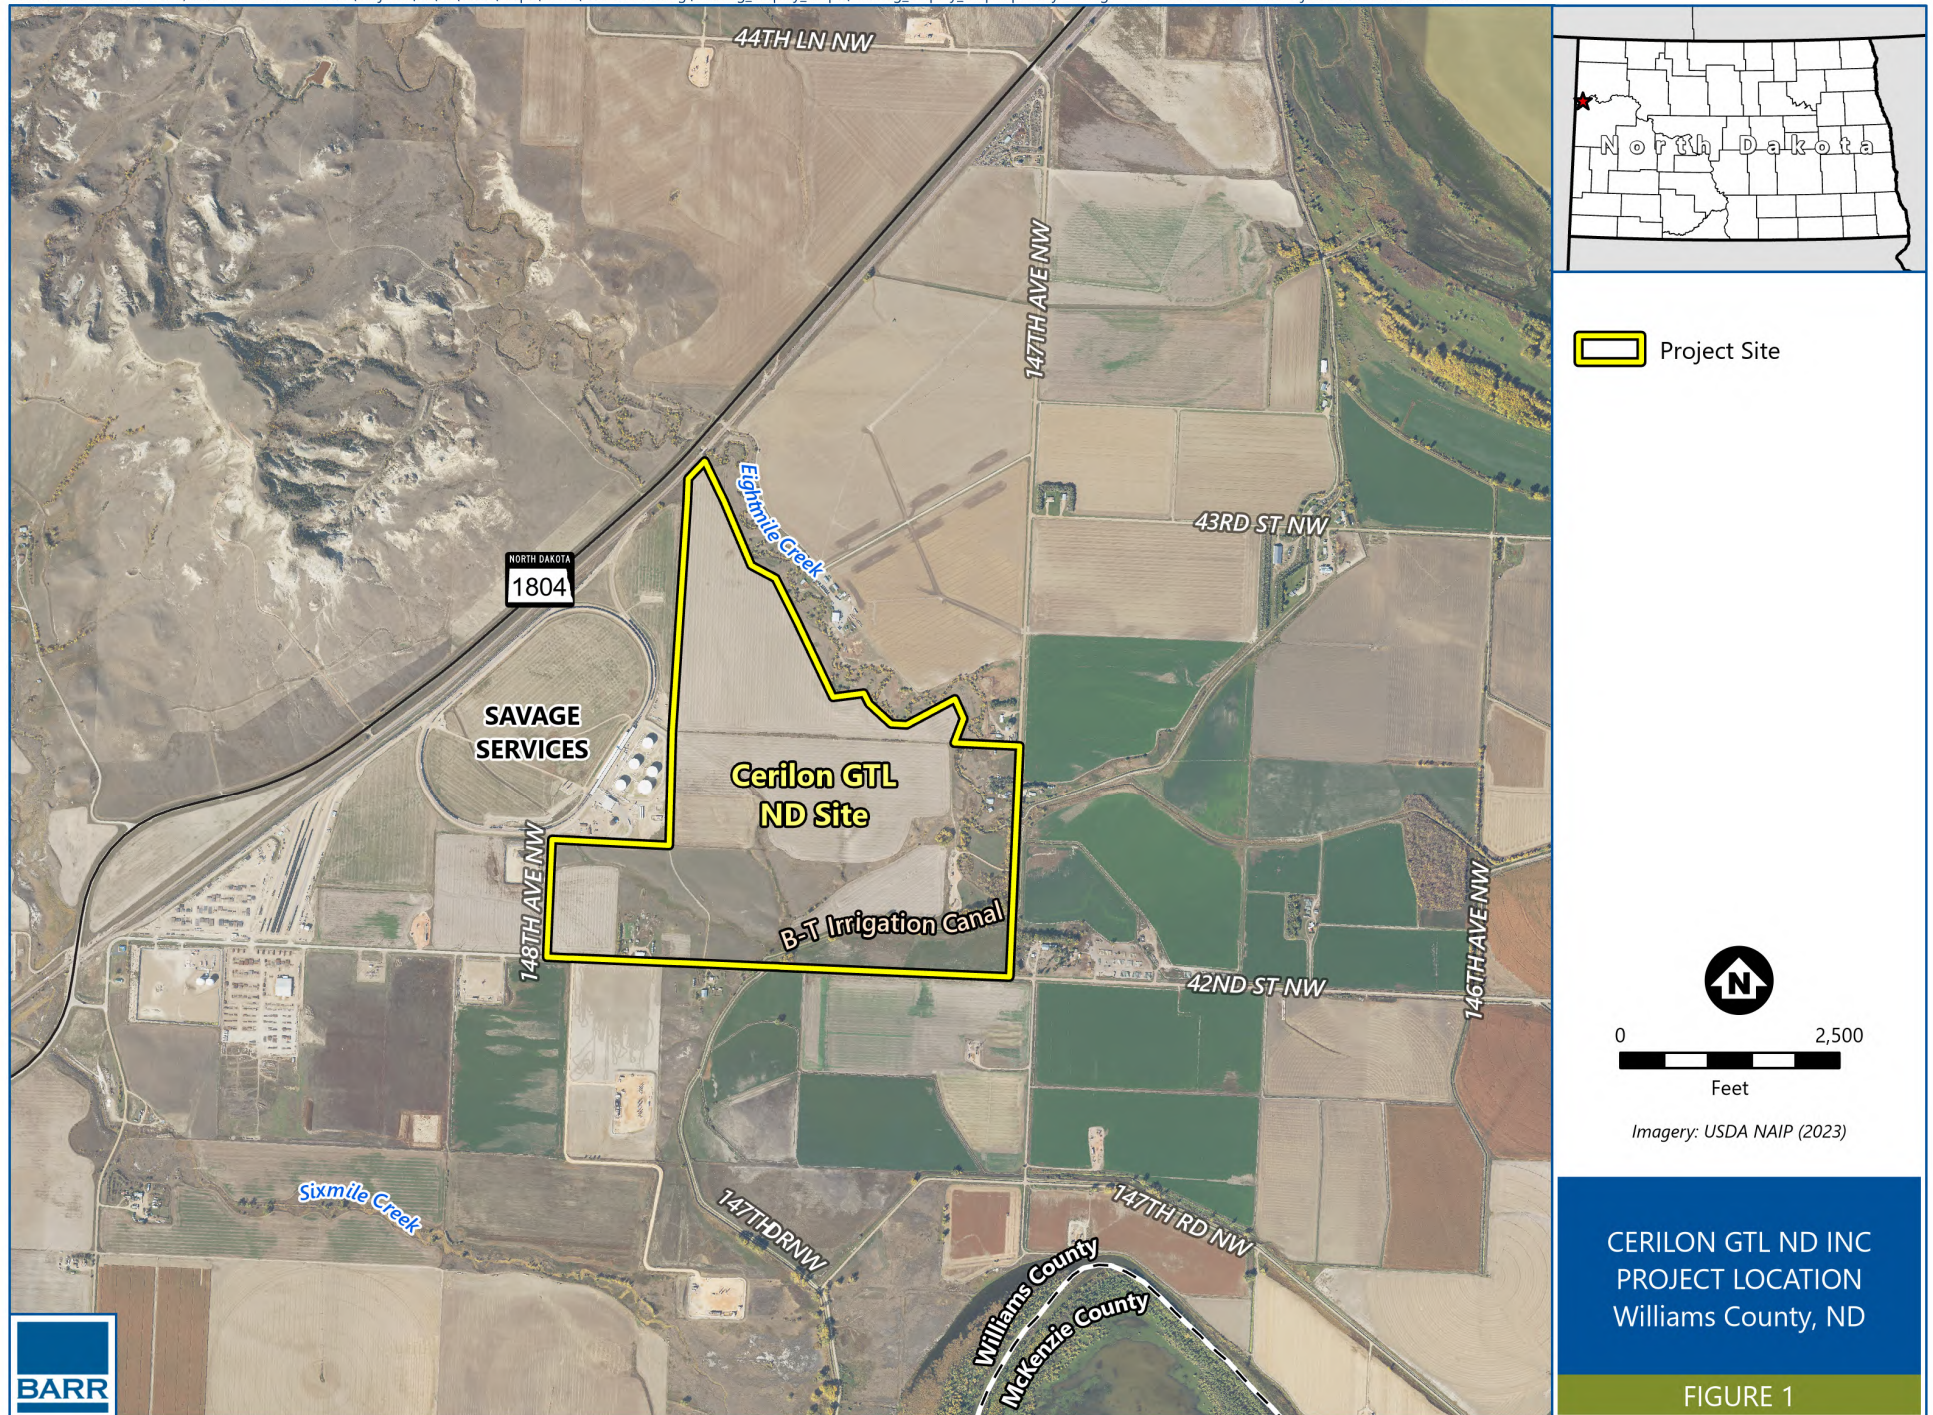

Operating Diagram

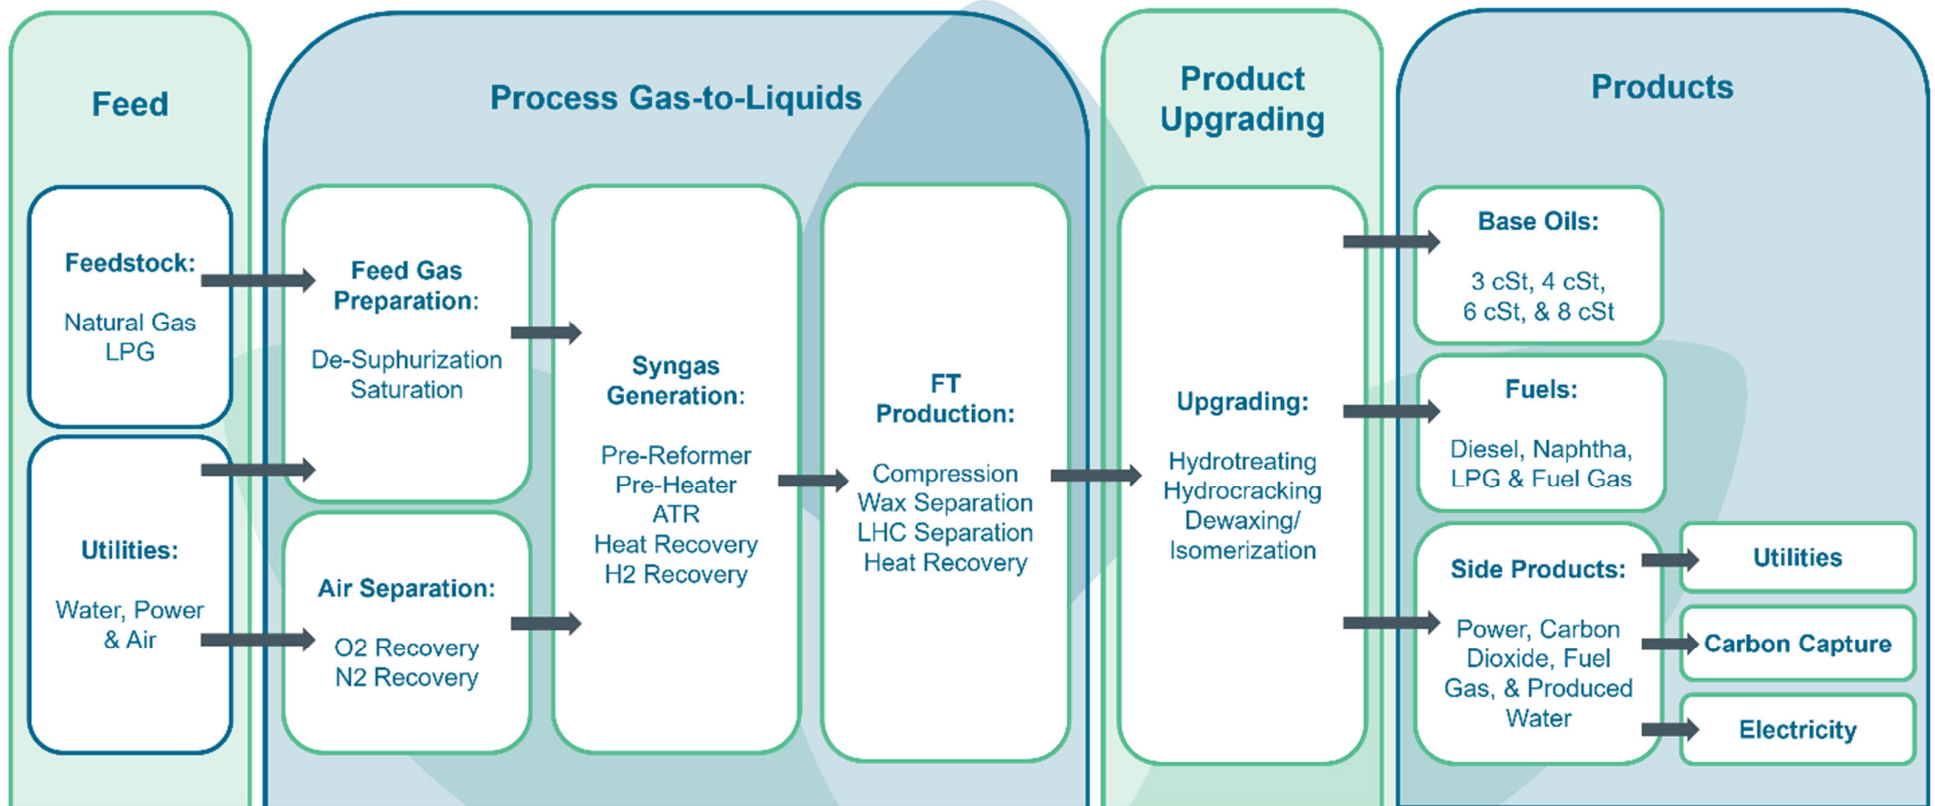

STATE OF NORTH DAKOTA
PUBLIC SERVICE COMMISSION

Cerilon GTL ND Inc.
Cerilon GTL North Dakota Project – Williams County
Siting Application

Case No. PU-23-325

CERTIFICATION RELATING TO ORDER PROVISIONS
ENERGY CONVERSION FACILITY SITING

I am Ron Opperman, a representative of Cerilon GTL ND Inc. ("Company") with authority to bind Company to requirements to be set forth by the Commission in its Order and I certify the following:

1. Company understands and agrees that the Certificate of Site Compatibility will be issued by the Commission subject to the conditions and criteria set forth in Chapters 49-22 and 49-22.1 of the North Dakota Century Code and Chapter 69-06-08 of the North Dakota Administrative Code, and that Company shall be responsible for compliance with this order and conditions and criteria set forth in the applicable laws and rules.
2. Company agrees to comply with the rules and regulations of all other agencies having jurisdiction over any phase of the proposed energy conversion facility including all city, township, and county zoning regulations.
3. Company understands and agrees that it shall obtain all other necessary licenses and permits, and shall provide copies of all licenses and permits to the Commission prior to construction activity associated with the energy conversion facility that requires said license or permit.
4. Company understands and agrees that the Certificate of Site Compatibility is subject to suspension or revocation and may, in an appropriate and proper case, be suspended or revoked for failure to comply with the Commission's order, the conditions and criteria of the certificate or subsequent modification, or failure to comply with the applicable statutes, rules, regulations, standards, and permits of other state or federal agencies.
5. Company agrees to maintain records that will demonstrate that it has complied with the requirements of the Commission's order and the Certificate of Site Compatibility, and that it will preserve these records for Commission inspection at any reasonable time upon reasonable notice.
6. Company understands and agrees that the authorizations granted by the Certificate of Site Compatibility for the energy conversion facility are subject to modification by

order of the Commission if deemed necessary to protect further the public or the environment.

Construction:

7. Company agrees to hold a preconstruction conference prior to commencement of any construction, which must include a Company representative, its construction supervisor, and a representative of Commission Staff, to ensure that Company fully understands the conditions set forth in the Commission's order.
8. Company understands and agrees that all cultural resource mitigation plans must be approved by the North Dakota State Historic Preservation Office prior to the start of any fieldwork and construction activity in the affected area.
- ~~9. Company understands and agrees that topsoil removal will begin when the Commission's third party construction inspector is present at the Project site to observe that topsoil is properly removed and kept segregated from subsoil until replacement occurs. Company shall establish the date and time for the Commission's third party construction inspector's topsoil removal oversight in the preconstruction conference.~~
- ~~10.9.~~ Company agrees to inform the Commission and the Commission's third-party construction inspector of its intent to start construction on the energy conversion facility prior to the commencement of construction. Once construction has started, Company shall keep the Commission and the Commission's third-party construction inspector updated of construction activities on a monthly basis.
- ~~11.10.~~ Company is aware that North Dakota law requires that all companies that own or operate electric generation of any size for the primary purpose of resale must comply with the standards of the National Electrical Safety Code in effect at the time of construction of the generation facility, and agrees to comply with that requirement.
- ~~12.11.~~ Company agrees to construct and operate the energy conversion facility in accordance with all applicable safety requirements.
12. Company understands and agrees that it shall bury all underground lines to a depth of at least 48 inches to the top of the lines.
13. Company will strip and segregate topsoil that is deemed by a qualified environmental consultant to be of sufficient quality for reclamation purposes and will either stockpile the material on site in accordance with best practices or will transport topsoil to another user for reclamation or storage in the local region. Subsoils will be stored, used on site or transferred to another site for reclamation purposes or storage.
- ~~13.~~

14. —

~~Company understands and agrees that topsoil, up to 12 inches, or topsoil to the depth of cultivation, whichever is greater, over and along trench areas, roadways, and locations of associated facilities must be carefully stripped and segregated from the subsoil. Any area on which excavated subsoil will be placed must first be stripped of topsoil. The stripped topsoil must not be stockpiled in natural drainages, and must be protected from water erosion. Care must be taken to protect topsoil from unnecessary compaction by heavy machinery. Unless otherwise approved by the Commission, topsoil must be removed before topsoil freezes in the late fall/ early winter to the point that frost inhibits proper soil segregation. After backfilling with subsoil is completed, any excess subsoil must be placed over the excavation area, blending the grade into existing topography. Topsoil must be replaced over areas from which it was stripped only after the subsoil is replaced.~~

~~15.~~14. Company understands and agrees that all buried facility crossings of graded roads shall be bored unless the responsible governing agency specifically permits Company to open cut the road.

~~16.~~15. Company understands and agrees that staging areas or equipment shall not be located on land owned by a person other than Company unless otherwise negotiated with landowners.

~~17.~~16. Company understands and agrees that if any cultural resource, paleontological site, archeological site, historical site, or grave site is discovered during construction, it must be marked, preserved and protected from further disturbances until a professional examination can be made by the State Historical Society, and a report of such examination is filed with the Commission.

~~18.~~17. Company understands and agrees that construction must be suspended when weather conditions are such that construction activities will cause irreparable damage to roads or land, unless adequate protection measures are taken by Company.

~~19.~~18. Company understands and agrees that the Commission has authority to stop Project construction activities in the event of a probable violation of the siting laws, siting rules, or applicable Commission Orders if, in the opinion of the Commission, construction activities are likely to result in irreparable or significant harm.

Restoration and Maintenance:

~~20.~~19. Company agrees that it shall, as soon as practicable upon the completion of the construction of the energy conversion facility, restore the area affected by the

activities to as near as is practicable to the condition as it existed prior to the beginning of construction.

~~21-20.~~ Company understands and agrees that all pre-existing township and county roads and lanes used during construction must be repaired or restored to a condition that is equal to or better than the condition prior to the construction of the energy conversion facility and that will accommodate their previous use, and that areas used as temporary roads or working areas during construction must be restored to their original condition.

~~22-21.~~ Company understands and agrees that reclamation, fertilization, and reseeding is to be done according to the Natural Resources Conservation Service recommendations, unless otherwise specified by the landowner and approved by the Commission.

~~23-22.~~ Company will fulfil its obligation for reclamation and maintenance of the approved site continuing throughout the life of the energy conversion facility.

~~24-23.~~ Company will repair all fences and gates removed or damaged during all phases of construction and operation of the proposed energy conversion facility.

~~25-24.~~ Company will repair or replace all drainage tile broken or damaged as a result of construction and operation of the proposed energy conversion facility.

~~26-25.~~ Company agrees to comply with the Tree and Shrub Mitigation Specifications, attached.

~~27-26.~~ Company understands and agrees that it shall work with landowners and residents to mitigate any increase in television and residential radio interference that results from the construction of the energy conversion facility.

~~28-27.~~ Company understands and agrees that it shall remove all waste that is a product of construction and operation, restoration, and maintenance of the site, and properly dispose of it on a regular basis.

~~29-28.~~ Company understands and agrees that it shall provide any necessary safety measures for traffic control or to restrict public access to the energy conversion facility.

Communication with Landowners and PSC:

~~30-29.~~ Company agrees to provide the Commission with engineering design drawings showing surveyed structure and collection substation locations prior to construction.

~~34-30.~~ Company understands and agrees that it shall advise the Commission as soon as reasonably possible of any extraordinary events which take place at the site of the energy conversion facility, including injuries to any person.

~~32-31.~~ Company agrees to report to the Commission, as soon as reasonably possible, the presence in or near the approved site of any critical habitat of threatened –or endangered species that Company becomes aware of and which were not previously reported to the Commission.

~~33-32.~~ Company agrees to provide the Commission with both an electronic and a paper copy of the site approved by the Commission and the facility design specifications for the construction of the energy conversion facility showing the location of the energy conversion facility as built, and will provide this information within 3 months of the completion of the construction. Company also agrees to provide an electronic version of the site approved by the Commission and the facility design specifications for the construction of the energy conversion facility showing the location of the energy conversion facility as built that can be imported into ESRI GIS mapping software within 3 months of the completion of the construction. This electronic map data must be referenced to the North Dakota coordinate system of 1983, North and/or South zones US Survey feet (NAD 83) UTM Zone 13N or 14N feet (NAD 83), or geographic coordinate system (WGS 84) feet. The vertical data must be in the appropriate vertical datum for the coordinate system used. All submissions must specify the datum in which the data was developed.

~~34-33.~~ Company shall notify the Commission, as soon as reasonably possible, if any damage, as defined by North Dakota Century Code Chapter 49-23, occurs to underground facilities during construction conducted under the certificate or permit issued in this proceeding. In the event of any damage to underground facilities, Company shall suspend construction in the vicinity of the damage until compliance with One-Call Excavation Notice System requirements under North Dakota Century Code Chapter 49-23 has been determined.

~~35-34.~~ Company agrees that it shall provide, if requested, educational material for landowners within the site boundaries about the proposed energy conversion facility and any restriction or danger concerning the proposed energy conversion facility.

~~36-35.~~ Company understands and agrees that it shall implement a procedure for how complaints concerning the proposed energy conversion facility will be handled by Company

Modification of Energy Conversion Facility or Energy Conversion Site Plan:

~~37.~~36. Before conducting any construction activities for any modification within the designated site, the Company will file the name and contact information for a key contact person for the purposes of notice and communication during the site modification application and will use the following procedures:

- A. Before conducting any construction activities for any modification within the designated site, and such **construction activities will not affect any known exclusion or avoidance areas** within the designated site, the Company will file certification and supporting documentation:
 - 1. Affirming that construction activities will not affect any known exclusion or avoidance areas within the designated site;
 - 2. Including a map meeting the requirements of N.D. Admin. Code § 69-06-04-01(2)(n) identifying the designated site and site modification(s); and
 - 3. Affirming that Company will comply with the Commission's order, law and rules designating the site.
- B. Before conducting any construction activities for any modification within the designated site, and such construction activities will not affect any known exclusion but **may affect an avoidance area** within the designated site, the Company will file:
 - 1. A specific description of the avoidance area expected to be impacted, including a map meeting the requirements of N.D. Admin. Code § 69-06-04-01(2)(n) identifying:
 - a. the designated site and the site modification;
 - b. all exclusion and avoidance areas within the portion of the designated site containing the site modification.
 - 2. Certification and supporting documentation affirming that construction activities will not affect any known exclusion area.
 - 3. All field studies performed on the portion of the designated site containing the site modification;
 - 4. Specific information about any mitigation measures Company will take within the modification area;
 - 5. Certification that each owner of real property on which the modification is to be located and any applicable governmental entity with an interest in the same modification area do not oppose the modification;
 - 6. Certification that unless the Commission previously authorized the impact to the same avoidance area, that the utility has good cause and a specific reason to impact the avoidance area and a reasonable alternative does not exist;
 - 7. Certification that Company will comply with the Commission's order, law and rules designating the site.

~~38.~~37. Company acknowledges and agrees that written authorization from the Commission for impacting the avoidance area is necessary prior to commencement of construction activity.

Dated this ____ day of June, 2024.

Cerilon GTL ND Inc.

By: Ron Opperman

Its: _____

**STATE OF NORTH DAKOTA
PUBLIC SERVICE COMMISSION**

**Cerilon GTL ND Inc.
Cerilon GTL North Dakota Project – Williams County
Siting Application**

Case No. PU-23-325

Tree and Shrub Mitigation Specifications

Inventory

Prior to cutting or clearing trees or shrubs for construction:

- All trees one-inch or greater in diameter at breast height must be inventoried to record the location, number, and species.
- All shrubs and all coniferous trees of any diameter must be inventoried to record the location, number, and species.

Clearing

~~The maximum width of tree and shrub removal is 50 feet, unless otherwise approved by the Commission.~~

Replacement

1. Landowners must be given the option to have trees and shrubs that are removed from their property replaced on their property. The landowner may waive this option in writing. If the landowner waives this option, the company shall plant replacement trees and shrubs in an alternate location in the same region, if practical.
2. Trees and shrubs must be replaced on a minimum two-to-one basis. The company shall develop a Tree and Shrub Mitigation Plan (Plan) in consultation with landowners who are seeking replacement trees and shrubs and in accordance with USDA-NRCS-North Dakota Field Office Technical Guide: Windbreak and Woodland Tree Care and Management. The guidelines outlined in the Technical Guide shall be followed until filing of the Plan summary outlined in number 5 below.
3. The purpose of the company's Tree and Shrub Mitigation Plan is to create sustainable plantings, appropriate for the local soil and growing conditions that will provide long-term benefit to landowners, farmers and ranchers, the community, wildlife and the environment.
4. The Plan, including the proposed number, variety, type, location, and approximate date for plantings, shall be filed with and approved by the Commission.
5. Two years after completion of the plan, the company must file a summary documenting how the plan achieved the purpose outlined in number 3 above. The summary must also report the number of surviving replacement trees and shrubs.
6. The Commission will consider, on a limited basis as conditions warrant, mitigation plans that provide long-term wildlife habitat and conservation benefits but do not involve the replanting of trees and shrubs.

Cerilon GTL ND Inc.
Case No. PU-23-325
Proposed Hearing Exhibit List

Exhibit No.	Title
1	Cerilon Siting Application Docket No. 1
2	Cultural Resources Report – Redacted Application Appendix F Docket No. 7
3	Agency Correspondence NDDEQ Docket No. 18
4	Agency Correspondence NDSHPO Docket No. 23.2
5	Agency Correspondence USDOD Siting Clearinghouse Docket No. 23.3
6	Williams County Correspondence Docket No. 23.4
7	Agency Correspondence ND Dept. of Commerce Docket No. 23.5
8	Williams County CUP Approval Docket No. 23.6
9	Pre-filed Testimony of Rochelle Harding Docket No. 25
10	Pre-filed Testimony of Niel Erasmus Docket No. 26
11	Phase II Investigation Results Docket No. 27
12	Facility Traffic Impact Study Docket No. 27
13	Technical Sound Memorandum Docket No. 27

[illegible]