



**ONE-CALL COMPLAINT**  
PUBLIC SERVICE COMMISSION  
SFN 59067 (08/2022)

**INSTRUCTIONS:** To allege a violation of the One-Call Excavation Notice System (N.D.C.C. Chapter 49-23), complete this form in its entirety.

**SECTION I – COMPLAINANT (Individual/entity completing form)**

|                                                                                                     |                                              |                                         |                             |
|-----------------------------------------------------------------------------------------------------|----------------------------------------------|-----------------------------------------|-----------------------------|
| Company/Entity Name (if applicable)<br>N/A                                                          |                                              |                                         |                             |
| Contact Person<br>Brady Carpenter                                                                   | Email Address<br>bradycarpenter413@gmail.com | Telephone Number<br>701-509-3350        |                             |
| Mailing Address<br>7 Park Way                                                                       | City<br>Minot                                | State<br>ND                             | Zip Code<br>58701           |
| Complainant is willing and able to testify on the complaint if matter proceeds to a formal hearing. |                                              | <input checked="" type="checkbox"/> YES | <input type="checkbox"/> NO |

**SECTION II – RESPONDENT (Individual/entity who allegedly violated the One-Call law)**

|                                                                                        |                                    |                                  |                   |
|----------------------------------------------------------------------------------------|------------------------------------|----------------------------------|-------------------|
| Company/Entity Name (if applicable)<br>North Prairie Regional Water District ("NPRWD") |                                    |                                  |                   |
| Contact Person<br>Joddy Meidinger                                                      | Email Address<br>billing@nprwd.com | Telephone Number<br>701-833-0492 |                   |
| Mailing Address<br>3811 Burdick Expressway                                             | City<br>Minot                      | State<br>ND                      | Zip Code<br>58701 |

**SECTION III – ALLEGED VIOLATION**

|                                                                                                                                                     |                                                                                                             |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| <b>OPERATOR – A person or entity who owns or operates an underground facility (i.e.: natural gas, electric, sewer, etc.).</b>                       |                                                                                                             |
| <input checked="" type="checkbox"/> Operator failed to mark or clear underground facility within locate period.                                     | <input type="checkbox"/> Operator failed to mark underground facility within 24 inches horizontally.        |
| <b>EXCAVATOR – A person or entity who conducts excavation (i.e.: homeowner, property owner, company, etc.).</b>                                     |                                                                                                             |
| <input type="checkbox"/> Excavation started prior to underground facility locate.                                                                   | <input type="checkbox"/> Excavator failed to provide locate notice prior to beginning excavation.           |
| <input type="checkbox"/> Excavator failed to conduct the excavation in a careful and prudent manner.                                                | <input type="checkbox"/> Excavator failed to renew locate request prior to expiration of the 21-day period. |
| <b>OTHER – May be issue/concern with One-Call Center or other alleged violation that is not listed under operator or excavator.</b>                 |                                                                                                             |
| <input checked="" type="checkbox"/> Write Issue/Concern: Improper Clear/No conflict despite NPRWD waterline in locate area; see attached narrative. |                                                                                                             |

**SECTION IV – DESCRIPTION/DAMAGE**

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                        |                                                         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|
| Date and Time of Event<br>08/29/2026 – time unknown                                                                                                                                                                                                                                                                                                                                                                                                                         | Location (Address, City, State / Nearest Intersecting Streets / Lat & Long)<br>US Hwy 2 near 15th Ave SW, Harrison Twp., Ward Co., ND. | One-Call Ticket Number<br>26104296                      |
| Underground Facility Affected<br><input type="checkbox"/> Electric <input type="checkbox"/> Gas <input type="checkbox"/> Cable <input type="checkbox"/> Communications <input checked="" type="checkbox"/> Water <input type="checkbox"/> Sewer/Storm Water <input type="checkbox"/> Petroleum <input type="checkbox"/> Other _____                                                                                                                                         |                                                                                                                                        |                                                         |
| Material & Size of Underground Facility (Poly, Steel, Coated Pipe / Fiberoptic / 2 KW / 1.5 in, 2 in / etc.)<br>NPRWD water main – material/size unknown                                                                                                                                                                                                                                                                                                                    |                                                                                                                                        | Operator(s) Affected<br>NPRWD                           |
| Estimated Value of Damage<br>Unknown                                                                                                                                                                                                                                                                                                                                                                                                                                        | Injuries (List Number, If Any)<br>0 Fatalities 0 Injuries 0 Hospitalizations                                                           | Number of Customers Affected<br>Unknown—outage reported |
| Description of the alleged violation/concern. If more space is required, attach additional page(s).<br>North Prairie returned "Clear/No conflict" on Ticket No. 26104296; a North Prairie waterline within the locate area was later struck; the alleged violation is failure to locate/mark or otherwise provide the approximate horizontal location under § 49-23-04(6)(a), with the positive-response issue under § 49-23-04(6)(n); see attached narrative and exhibits. |                                                                                                                                        |                                                         |

**SECTION V – SIGNATURE OF COMPLAINANT**

|                                  |                                 |                    |
|----------------------------------|---------------------------------|--------------------|
| Signature<br>/s/ Brady Carpenter | Printed Name<br>Brady Carpenter | Date<br>08/31/2026 |
|----------------------------------|---------------------------------|--------------------|

## **ATTACHMENT TO NORTH DAKOTA PSC ONE-CALL COMPLAINT**

### **ND One Call Ticket No. 26104296**

Alleged Violation/Concern: Failure to locate and mark or otherwise provide the approximate horizontal location of an underground water facility; potentially improper Clear/No conflict positive response - N.D.C.C. § 49-23-04(6)(a), (c), and (n)

#### **1. Ticket and North Prairie Response**

North Dakota One Call Ticket No. 26104296 was submitted by Capitol City Connections, LLC on August 12, 2026, as a ROUTINE ticket. The work-to-begin time was August 15, 2026, at 12:01 a.m. The ticket identified installation of conduit and fiber, stated "Depth: 10FT" and "Tunneling/Boring: Y," and instructed operators to mark the entire southwest right-of-way along the identified route in Harrison Township, Ward County. The ticket identified the site by MAP, directed operators to call the excavator's alternate contact with questions, and stated: "MAPS AVAILABLE. SEE MAP 023 PL 08-014." The MAP site identification is also consistent with N.D.C.C. § 49-23-04(2), which recognizes a map or detailed drawing as a means of identifying the excavation site.

North Prairie Regional Water District was a notified operator. Its public positive response was "Clear/No conflict," with the following comment: "In contact with Bayron, they will run 4' depth and not to exceed 6'. IF work exceeds 6' at any point Bayron will contact NRPWD. All surface assets are marked in this locate polygon." The public Search and Status record therefore documents a depth discussion and the marking of surface assets, but it does not itself state that the buried North Prairie waterline was field-marked or that its approximate horizontal route was otherwise provided to the excavator.

#### **2. Damage Event and Emergency Repair Response**

On Saturday, August 29, 2026, during excavation associated with Ticket No. 26104296, a North Prairie Regional Water District underground waterline was struck.

On Sunday, August 30, 2026, at approximately 4:06 p.m., I spoke by telephone with Bayron Lopez, the alternate contact identified on Ticket No. 26104296. During that conversation, Mr. Lopez confirmed to me that the underground waterline struck during the excavation was a North Prairie Regional Water District waterline and that no North Prairie markings identifying that underground waterline were present at the time of the strike.

At 4:48 p.m. on August 29, North Prairie submitted Emergency Ticket No. 26116269 for "EMERGENCY - REPAIR WATER MAIN," with a work-to-begin time of 5:15 p.m. and the remark "EMERGENCY CREW EN ROUTE."

#### **3. Statutory Issue**

N.D.C.C. § 49-23-01(11) defines "locate" as an operator's markings of an underground facility showing its approximate horizontal location, including all lines, line direction, intersections, tees, and lateral facilities. Section 49-23-01(16) defines "positive response" as notification by the operator to the notification center that underground facilities within the area covered by a location request have been marked or cleared. These definitions are significant here because North Prairie's public response documents a discussion concerning excavation depth and states that surface assets were marked, but does not itself identify any horizontal-location information for the buried waterline.

N.D.C.C. § 49-23-04(6)(a) provides that an operator with underground facilities within the area of a location request shall locate and mark or otherwise provide the approximate horizontal location of the operator's underground facilities within the location period or as agreed by the parties. The issue presented by this complaint is whether North Prairie satisfied that operator duty before entering its final "Clear/No conflict" response.

If the Commission determines that the damaged waterline was installed before August 1, 2013, the two-foot accuracy provision in § 49-23-04(6)(b) does not apply to that water facility, and this complaint does not allege a violation of the two-foot standard. The pre-2013 exception appears in subsection (6)(b), while subsection (6)(a) separately states the operator's horizontal-location duty. Subsection (6)(c) also

specifically provides that when an operator cannot establish the exact location of an underground facility conveying water, the operator shall mark the location as accurately as possible.

That distinction is consistent with the original structure of North Dakota's One-Call law. When the statewide system was enacted in 1995, water facilities were excluded from the two-foot accuracy provision, while the same law separately required an operator unable to establish the exact location of a water facility to mark it as accurately as possible. See 1995 N.D. Sess. Laws ch. 455, § 4(3)(a)-(c). The historical structure therefore supports treating the accuracy standard and the underlying water-facility locating duty as separate questions.

N.D.C.C. § 49-23-04(5)(e) requires the notification center to establish procedures to receive from operators and convey to ticket holders positive responses when operators have located or cleared underground facilities identified within the area of a location request. Section 49-23-04(6)(n) further provides that an operator that has completed marking of the excavation area or has determined there are no facilities in the area identified in the ticket shall provide positive response. Because North Prairie's underground waterline was in the project area and was subsequently struck, I request that the Commission determine the factual and legal basis for North Prairie's final "Clear/No conflict" response, including whether horizontal-location information was otherwise provided and what effect, if any, the documented depth discussion had on its operator duties.

#### **4. Facility-Specific Basis for the Clear/No Conflict Response**

The original public ticket continued to state a planned depth of 10 feet and identified tunneling/boring, while North Prairie's response comment records a separate understanding that work would be at four feet and not exceed six feet. The public Search and Status record does not show whether a formal modification, replacement ticket, or other notification-center record changed the original excavation information. The absence of such an entry from the public record does not establish that no additional communication occurred; that fact should be resolved from North Dakota One Call's retained records.

If North Prairie relied on the anticipated depth of its waterline in deciding that the excavation presented no conflict, I respectfully request that the Commission determine what facility-specific information North Prairie possessed at the time of its response. Relevant records may include as-built drawings, GIS records, installation records, prior exposure measurements, repair records, field notes, or other documentation showing the known or estimated horizontal and vertical location of this specific waterline. A general assumption about how deeply a waterline would ordinarily be installed should be distinguished from documented information concerning this particular facility at this location.

The actual excavation path and depth at the strike point, and the actual location and depth of the damaged waterline as exposed during repair, may be relevant to evaluating the depth-related rationale reflected in North Prairie's response comment and the factual circumstances of the damage. I request that the Commission verify those facts for that purpose. This complaint does not allege a separate violation by the excavator.

#### **5. Consequences and Damage-Prevention Significance**

The strike interrupted the project and required an unplanned North Prairie emergency water-main repair response. North Prairie also issued a contemporaneous customer alert concerning the water-leak repair and customers along Highway 2 and County Road 12. I do not assume the duration of the work interruption, the number of customers affected, the amount of water lost, or the cost of the repair, and I request that Commission staff verify any such impacts from contemporaneous records. These consequences are not offered as independent violations; they explain the practical significance of the locating issue presented.

An existing waterline whose horizontal location is not identified before another underground facility is installed can also create a continuing operational conflict. If facilities are placed directly above, immediately adjacent to, or crossing one another without the existing waterline's location being known, future crews may have less room to safely expose, maintain, repair, replace, or relocate either facility. Future locating and emergency repair work can likewise require additional time and caution to avoid the

neighboring facility. I offer this only as operational context and not as a separate alleged statutory violation.

## **6. Requested Commission Review**

I respectfully request that the Public Service Commission investigate North Prairie Regional Water District's response to Ticket No. 26104296 and obtain or review, as appropriate:

1. the complete retained ticket, Status History, positive-response records, Ticket Check audit trail, comments, and any backend changes for Ticket No. 26104296, including the date, time, and source of North Prairie's Clear/No conflict response;
2. North Dakota One Call's retained records concerning Ticket No. 26104296, including any telephone recordings, electronic communications, operator-response records, or other communications handled through or retained by the notification center, together with any formal modification, replacement ticket, or other ticket action affecting the original excavation information. I also request that the Commission obtain from North Prairie and Capitol City Connections, as appropriate, their own direct communications - including calls, texts, emails, or other records - sufficient to establish the complete content and scope of any agreement or understanding concerning excavation depth, locating, or the provision of horizontal-location information. I also request that Commission staff confirm with Mr. Lopez whether North Prairie markings identifying the underground waterline were present at the excavation site when the waterline was struck.
3. the map and site-identification materials associated with Ticket No. 26104296, including MAP 023 PL 08-014, together with records sufficient to establish what project-specific information was transmitted or made available to North Prairie;
4. whether North Prairie physically marked, mapped, described, supplied coordinates for, or otherwise provided the approximate horizontal location of the waterline before excavation, including any horizontal-location information supplied outside the public Search and Status comment;
5. North Prairie's as-builts, GIS records, installation records, locate records, field notes, prior exposure or repair records, and other documentation showing what North Prairie actually knew about the waterline's horizontal location, facility-specific depth, installation date, and potential relationship to the proposed excavation before entering Clear/No conflict;
6. post-strike exposure, repair, and project records sufficient to establish the precise strike location, actual waterline depth, and the actual excavation path and depth at the strike point, solely as necessary to evaluate North Prairie's response and the factual circumstances surrounding the damage;
7. contemporaneous records sufficient to verify the resulting project interruption, emergency-repair response, water-service interruption, and other documented restoration impacts.

I further request that the Commission determine: (1) whether North Prairie complied with § 49-23-04(6)(a) by locating and marking or otherwise providing the approximate horizontal location of its underground water facility; (2) if North Prairie could not establish the exact location of that water facility, whether § 49-23-04(6)(c) was satisfied; (3) whether the Clear/No conflict positive response was consistent with § 49-23-04(6)(n) under the actual facts known to North Prairie when the response was entered; (4) what effect, if any, any agreement between North Prairie and the excavator had on the operator duties at issue; and (5) whether North Prairie's response complied with the requirements of Chapter 49-23 as written, including any agreement permitted under § 49-23-04(6)(a), or instead relied on a depth-based exception or limitation not otherwise provided by statute; and whether an operator may treat the anticipated depth of its underground facility as a substitute for the statutory horizontal-location requirement absent an applicable statutory exception or agreement.

If the damaged waterline predates August 1, 2013, I request that the Commission apply the limited exception in § 49-23-04(6)(b) to the two-foot accuracy issue while separately evaluating subsections (6)(a), (c), and (n).

North Dakota One Call publicly states that it retains excavation-notice records, including ticket information and recorded conversations, for at least six years. I request that the Commission rely on those notification-center records for communications and ticket activity actually handled through or retained by North Dakota One Call. To the extent relevant communications occurred directly between North Prairie and Capitol City Connections outside the notification center, I request that the Commission obtain those records or statements from the parties themselves.

#### **7. Evidence Preserved / Exhibits and References**

Exhibit A - Ticket No. 26104296 Search and Status record, preserved Aug. 30, 2026.

Exhibit B - Ticket No. 26116269 Search and Status record, preserved Aug. 30, 2026.

Exhibit C - Screenshot of North Prairie Regional Water District customer alert concerning a “Water Leak Repair” for customers along Highway 2 and County Road 12, received August 29, 2026, at approximately 4:35 p.m.

Additional Status History and underlying records should be obtained or preserved by the Commission if available.

References: N.D.C.C. §§ 49-23-01(11), (16), 49-23-04(2), (5)(e), and (6)(a)-(c), (n), One-Call Excavation Notice System; 1995 N.D. Sess. Laws ch. 455, § 4(3)(a)-(c); North Dakota One Call, online ticketing/record-retention information; and PSC Case No. PU-18-374, Public Service Commission v. Verendrye Electric Cooperative, Inc. (Sept. 9, 2020) (analogous operator-side locating enforcement).

*Respectfully submitted* by Brady Carpenter

# North Dakota One Call

**Ticket No:** 26104296  
**Original Call Date:** 08/12/26 12:12 pm  
**Work to Begin Date:** 08/15/26 12:01 am  
**Expiration Date:** 09/05/26 12:01 am

**LORQ ROUTINE**  
**Op:** webusr6  
**Op:** iasarahr

## CALLER INFORMATION

**Company Name:** CAPITOL CITY CONNECTIONS, LLC  
**Contact Name:** LEXI ROGGENSACK  
**Alt Contact:** BAYRON LOPEZ  
**Caller Address:** S 12339 IVY LN SPRING GREEN, WI 53588  
**Email Address:** locates4ccc@gmail.com

**Phone:** 815-978-1087  
**Alt. Phone:** 757-968-1461

## DIG SITE INFORMATION

**Type of Work:** INSTALLING CONDUIT AND FIBER  
**Work Being Done For:** LEDCOR/LTS  
**Depth:** 10FT  
**Tunneling/Boring:** Y

**Explosives:** N  
**White Lining/Site Identification:** MAP

## DIG SITE LOCATION

**County:** WARD  
**City Limits:** N  
**Address:**

**Place:** HARRISON TWP

**Street:** US HWY 2 E  
**Intersecting Street:** 69TH ST NW

**Location of Work:** MARK THE ENTIRE SOUTHWEST R/O/W. CALL BAYRON WITH QUESTIONS. MARK FOLLOWING THE ROUTE SE FOR 2005 FT, THEN ESE 2833 FT.

GOOGLE DRIVING DIRECTIONS: FROM THE INTERSECTION OF US HWY 2 E AND 69TH ST NW, HEAD SOUTHEAST ON US-2 E/US-52 E FOR 1.038 MI. TURN RIGHT ONTO 62ND ST SW FOR 88 FT HEAD NW FOR 8 FT TO THE BEGINNING OF THE ROUTE.

**Remarks:** ADDITIONAL TRSQ: T-155N R-83W S-19NE,T-155N R-83W S-20SE,T-155N R-83W S-20SW MAPS AVAILABLE. SEE MAP 023 PL 08-014.

**Caller Twp:** 155N

**Rng:** 83W

**Sect-Qtr:** 20-NW

**Map Twp:** 155N  
**Map Coord NW Lat:** 48.2371798  
**SE Lat:** 48.2290504

**Rng:** 83W


**Sect-Qtr:** 20-SW-NW-SE,19-NE  
**Lon:** -101.3841100  
**Lon:** -101.3671230

## MEMBERS NOTIFIED

| District | Company Name                   | Marking Concerns | Status                                                                                                                                                                                                   |
|----------|--------------------------------|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CENEX01C | CENEX PIPELINE-N.D.            | 800-421-4122     | Clear/No conflict (Please call Nathan Washek (701)240-6493 if scope of work changes)                                                                                                                     |
| CENEX01E | CENEX PIPELINE-N.D.            | 800-421-4122     | Clear/No conflict (Please call Nathan Washek (701)240-6493 if scope of work changes)                                                                                                                     |
| CENEX10C | CENEX PIPELINE-N.D.            | 800-421-4122     | Clear/No conflict (Please call Nathan Washek (701)240-6493 if scope of work changes)                                                                                                                     |
| MDU01    | MONTANA DAKOTA UTILITIES CO    | 800-638-3278     | Marked                                                                                                                                                                                                   |
| MIDCON26 | MIDCONTINENT CABLE             | 605-271-0202     | Clear/No conflict (midco line outside of project area)                                                                                                                                                   |
| NDSWCO01 | N.D. STATE WATER COMMISSION    | 701-220-1351     | Clear/No conflict                                                                                                                                                                                        |
| NDXCEL01 | XCEL ENERGY                    | 800-848-7558     | Marked                                                                                                                                                                                                   |
| NPRW01   | NORTH PRAIRIE REGIONAL WATER   | 701-852-1886     | Clear/No conflict (In contact with Bayron, they will run 4' depth and not to exceed 6'. IF work exceeds 6' at any point Bayron will contact NRPWD. All surface assets are marked in this locate polygon) |
| SOURIS01 | SOURIS RIVER TELECOMMUNICATION | 801-364-1063     | Marked                                                                                                                                                                                                   |
| VEREND01 | VERENDRYE ELECTRIC COOPERATIVE | 801-364-1063     | Clear/No conflict                                                                                                                                                                                        |

**Legend:**  Locate Polygon

Lat/Lon 48.237880  
-101.367073

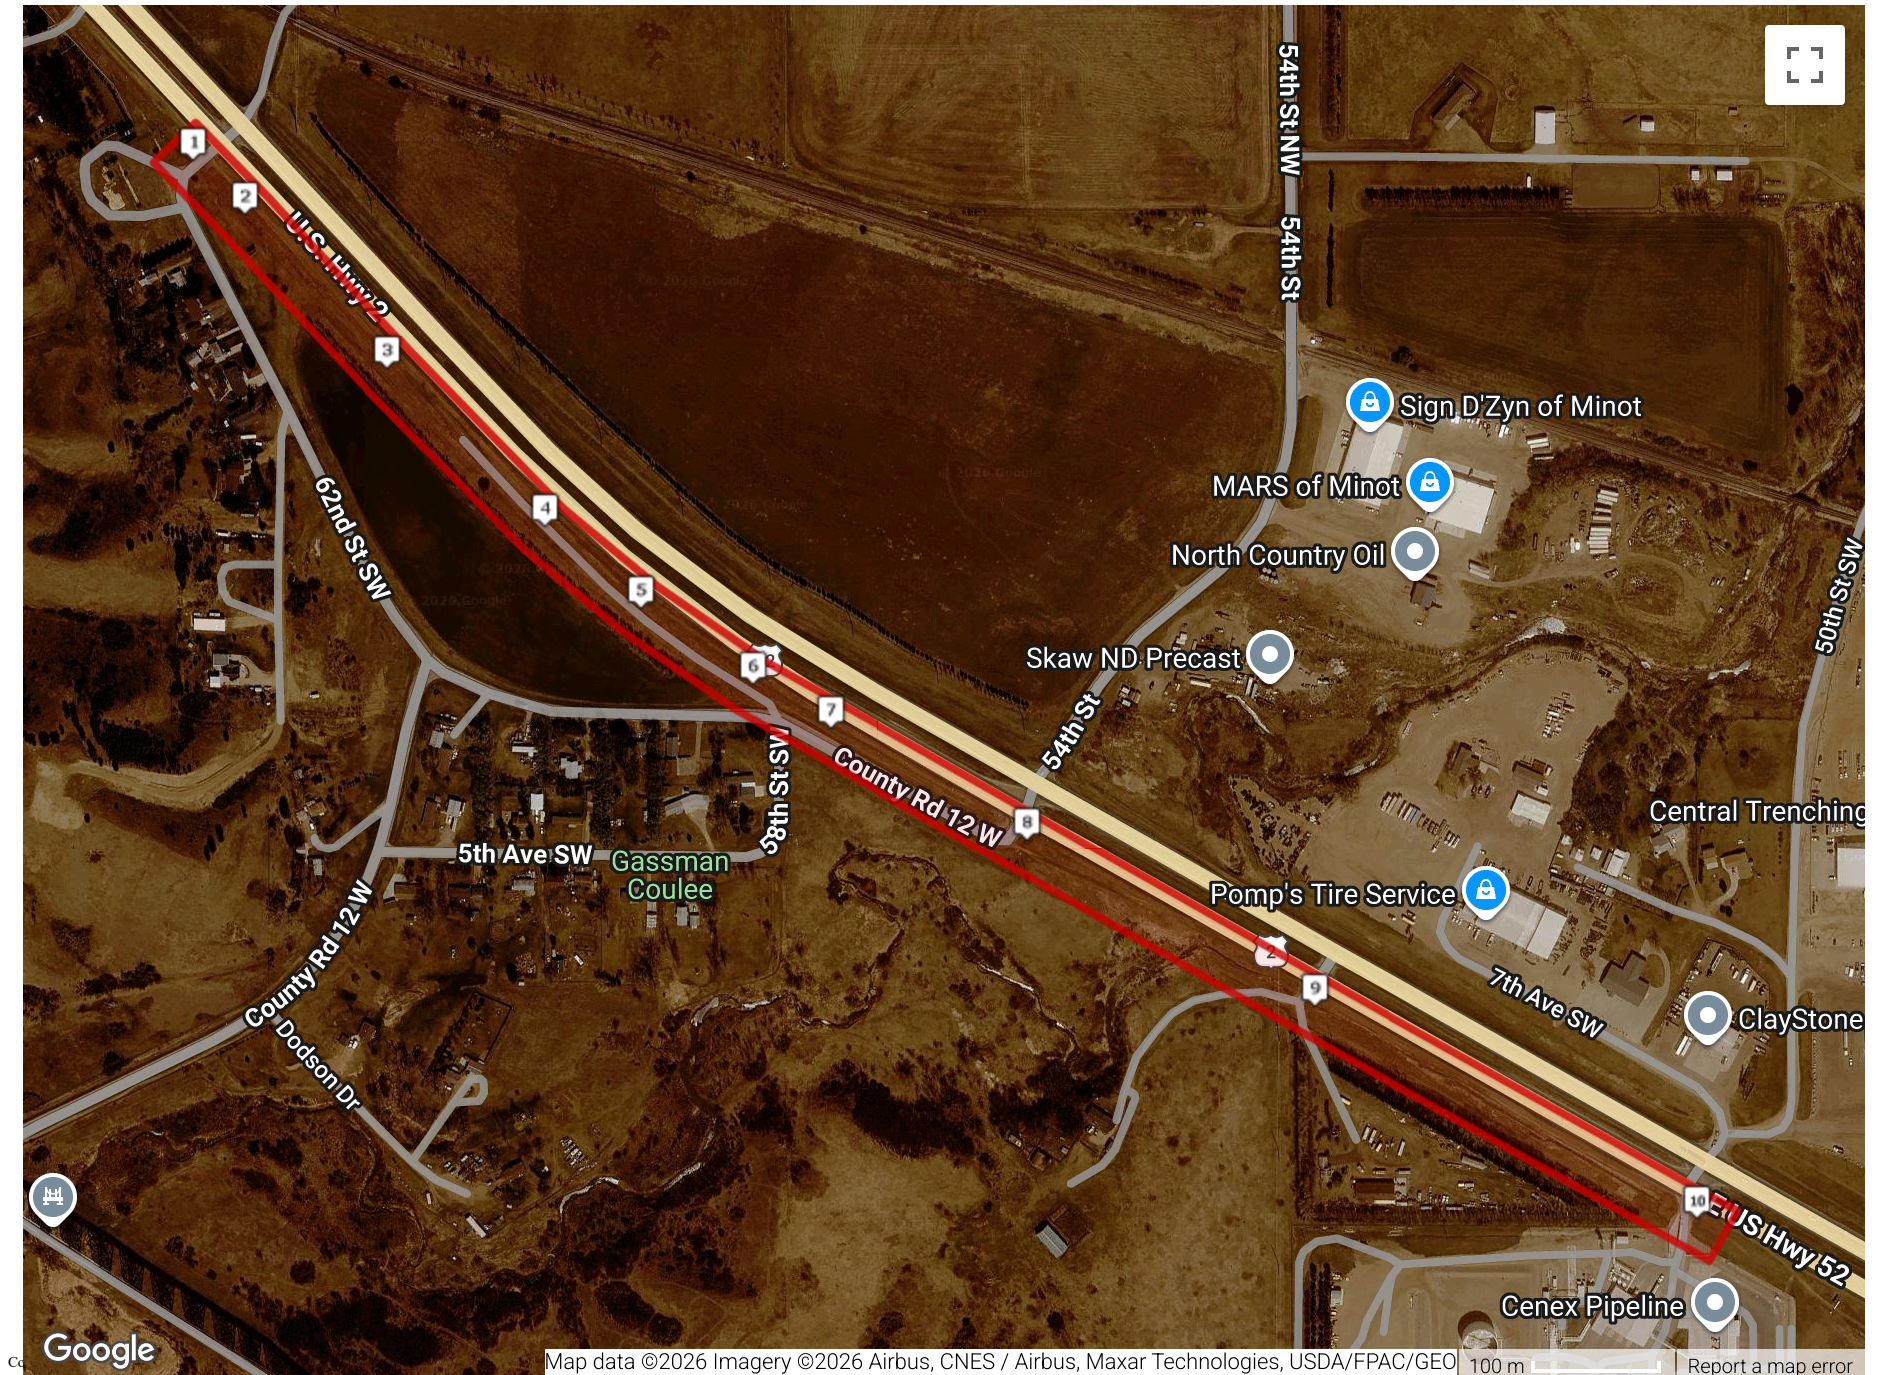

# North Dakota One Call

**Ticket No:** 26116269  
**Original Call Date:** 08/29/26 04:48 pm  
**Work to Begin Date:** 08/29/26 05:15 pm  
**Expiration Date:** 09/20/26 05:15 pm

**Op:** webusr6  
**Op:** webusr6

**EMER EMERGENCY**

## CALLER INFORMATION

**Company Name:** NORTH PRAIRIE REGIONAL WATER  
**Contact Name:** JODDY MEIDINGER  
**Alt Contact:** CRAIG  
**Caller Address:** 3811 BURDICK EXPRESSWAY MINOT, ND 58701  
**Email Address:** billing@nprwd.com

**Phone:** 701-833-0492  
**Alt. Phone:** 701-833-0490

## DIG SITE INFORMATION

**Type of Work:** EMERGENCY - REPAIR WATER MAIN  
**Work Being Done For:** NPRWD  
**Depth:** 10FT  
**Tunneling/Boring:** N

**Explosives:** N  
**White Lining/Site Identification:** MAP

## DIG SITE LOCATION

**County:** WARD  
**City Limits:** N  
**Address:** 5315  
**Street:** US HWY 2 AND 52 W  
**Intersecting Street:** 15TH AVE SW  
**Location of Work:** MARKING INSTRUCTIONS: MARK A 200 FT RADIUS AROUND THE FLAG - BLUE STAKE, BLUE FLAGS.  
**Remarks:** ADDITIONAL TRSQ: T-155N R-83W S-20SE, EMERGENCY CREW EN ROUTE  
**Caller Twp:** 155N  
**Map Twp:** 155N  
**Map Coord NW Lat:** 48.2316721  
**SE Lat:** 48.2305769

**Place:** HARRISON TWP

**Rng:** 83W  
**Rng:** 83W

**Sect-Qtr:** 20-SW  
**Sect-Qtr:** 20-SW-SE

**Lon:** -101.3734307  
**Lon:** -101.3717865


## MEMBERS NOTIFIED

| District | Company Name                   | Marking Concerns | Status                                                                                                                                                                                       |
|----------|--------------------------------|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CENEX01C | CENEX PIPELINE-N.D.            | 800-421-4122     | Clear/No conflict (Please call Nathan Washek (701)240-6493 if scope of work changes)                                                                                                         |
| CENEX01E | CENEX PIPELINE-N.D.            | 800-421-4122     | Clear/No conflict (Please call Nathan Washek (701)240-6493 if scope of work changes)                                                                                                         |
| CENEX10C | CENEX PIPELINE-N.D.            | 800-421-4122     | Clear/No conflict (Please call Nathan Washek (701)240-6493 if scope of work changes)                                                                                                         |
| MDU01    | MONTANA DAKOTA UTILITIES CO    | 800-638-3278     | Clear/No conflict                                                                                                                                                                            |
| MIDCON26 | MIDCONTINENT CABLE             | 605-271-0202     | Clear/No conflict                                                                                                                                                                            |
| NDSWCO01 | N.D. STATE WATER COMMISSION    | 701-220-1351     | Marked (Locate complete. 16" PVC water main line marked in work area. Water main installed prior to 2013, water main 20' either side of marks. Please pothole and verify before excavation.) |
| NDXCEL01 | XCEL ENERGY                    | 800-848-7558     | Clear/No conflict                                                                                                                                                                            |
| NPRW01   | NORTH PRAIRIE REGIONAL WATER   | 701-852-1886     | Marked                                                                                                                                                                                       |
| SOURIS01 | SOURIS RIVER TELECOMMUNICATION | 801-364-1063     | Marked                                                                                                                                                                                       |

**Legend:**  Locate Polygon

Lat/Lon      48.231984  
                  -101.369765





(844) 834-7235



Saturday • 4:35 PM

(ALERT) North Prairie Regional Water District - Water Leak Repair:  
Customers along Highway 2 and County Road 12 will experien... More  
Info: <https://mu1.co/STGYQ>



Text message

